# Vol. 1 of 3 EP-457/2013/C Central Kowloon Route Ho Man Tin Access Shaft Contract No. HY/2014/09 June 2018





### Environmental Permit No. EP-457/2013/C

### Central Kowloon Route

### **Independent Environmental Checker Verification**

Works Contract:	Ho Man Tin Access Shaft (HY/2014/09)
-----------------	--------------------------------------

### Reference Document/Plan

Document/Plan to be Certified/ Verified: Monthly EM&A Report No.5 (June 2018)

Date of Report: 11 July 2018 (Rev. 1)

Date received by IEC: 11 July 2018

### Reference EP Condition

Environmental Permit Condition: 3.4

Submission of Monthly EM&A Report of the Project

3.4 Four hard copies and one electronic copy of monthly EM&A Report shall be submitted to the Director within 2 weeks after the end of each reporting month throughout the entire construction period. The EM&A Reports shall include a summary of all non-compliance. The submissions shall be certified by the ET Leader and verified by the IEC as complying with the requirements as set out in the EM&A Manual before submission to the Director. Additional copies of the submission shall be provided to the Director upon request by the Director.

### **IEC Verification**

I hereby verify that the above referenced document/ $\frac{1}{plan}$  complies with the above referenced condition of EP-457/2013/C.

Ms Mandy To

Mondy 20.

Date: 11 July 2018

Independent Environmental Checker

Our ref: 0436942\_IEC Verification Cert\_HMTS\_Monthly EM&A Rpt No.5.docx



# Acuity Sustainability Consulting Limited

Unit 1908, iPlace, Nos. 301-305 Castle Peak Road, Kwai Chung, N.T. Tel.: (852) 2333 6823 Fax.: (852) 2333 1316

### Nishimatsu Construction Co. Ltd.

# Central Kowloon Route Contract HY/2014/09 Ho Man Tin Access Shaft

Monthly EM&A Report No. 5

(Period from 1 to 30 June 2018)

Rev. 1

(11 July 2018)

	Name	Signature
Prepared by	Karen K. Y. Cheung	
Checked & Reviewed by	Nelson T. H. Tsui	74
Approved & Certified by	Kevin W. M. Li (Environmental Team Leader)	

### TABLE OF CONTENTS

### **EXECUTIVE SUMMARY**

1.	BASIC PROJECT INFORMATION	6
2.	ENVIRONMENTAL STATUS	8
3.	MONITORING RESULTS	9
4.	SUMMARY OF COMPLAINTS, NOTIFICATION OF SUMMONS AND PROSECUTIONS	16
5.	EM&A SITE INSPECTION	18
6.	FUTURE KEY ISSUES	19
7.	CONCLUSION AND RECOMMENDATIONS	20

### LIST OF APPENDICES

- A. Alignment and Works Area for the Contract No. HY/2014/09
- B. Construction Programme
- C. Project Organization Chart
- D. Dust Event-Action Plan (EAP)
- E. Noise Event-Action Plan (EAP)
- F. Environmental Mitigation Implementation Schedule (EMIS)
- G. Monitoring Schedules of the Reporting Month
- H. Calibration Certificate (Air Monitoring)
- I. Calibration Certificate (Noise)
- J. The Certification of Laboratory with HOKLAS Accredited Analytical Tests
- K. Location Plan of Noise and Air Quality Monitoring Station
- L. Monitoring Data (Air Monitoring)
- M. Monitoring Data (Noise)
- N. Waste Flow Table
- O. Statistics on Complaint, Notifications of Summons and Successful Prosecutions
- P. Monitoring Schedule of the Coming Month

### **EXECUTIVE SUMMARY**

- A.1 NISHIMATSU Construction Company Limited ("Contractor") commenced the construction works of Highway Department (HyD) Central Kowloon Route Contract No. HY/2014/09 Ho Man Tin Access Shaft ("The Project") on 20 February 2018. This is the 5<sup>th</sup> monthly Environmental Monitoring and Audit (EM&A) report presenting the EM&A works carried out during the period from 1 June 2018 to 30 June 2018.
- A.2 A summary of the construction works that undertaken for the Project during the reporting month is listed below.

### **Construction Activities undertaken**

- Diaphragm wall construction
- A.3 A summary of regular construction noise and construction dust monitoring activities in this reporting period is listed below:

Regular construction noise monitoring during normal working hours

M-N3 5 times

**Construction dust (24-hour TSP) monitoring** 

M-A3 5 times

**Construction dust (1-hour TSP) monitoring** 

M-A3 15 times

- A.4 No construction work was conducted during time period other than normal working hours during this reporting month.
- A.5 Inert construction and demolition (C&D) materials and non-inert C&D materials were the wastes that generated from this Project. During the reporting month, 1218 m³ inert C&D material was generated from the Project. No plastics and no paper/ cardboard packaging were generated and sent to recyclers for recycling during reporting period, respectively. About 6 m³ of non-recyclable non-inert C&D materials, such as general refuse, were disposed of at landfill. No metal and chemical waste were generated during this reporting month.
- A.6 Bi-weekly inspection of the implementation of landscape and visual mitigation measures was conducted on 6 and 20 June 2018. Details of the audit findings and implementation status are presented in Section 5.
- A.7 Joint weekly site inspections were conducted by representatives of the Contractor, Engineer and Contractor's ET on 6,13,20,27 June 2018. The representative of IEC joined the site inspection on 13 June 2018. Details of the audit findings and implementation status are presented in Section 5.
- A.8 No change has been made from the described in the approved EM&A, such as construction method, mitigation proposals and design changes.

- A.9 No exceedance of the Action and Limit Levels of regular construction noise monitoring was recorded during the reporting period.
- A.10 No exceedance of the Action and Limit Levels of 24-hour TSP and 1-hour TSP monitoring were recorded during the reporting period.
- A.11 No complaint was received during reporting period.
- A.12 No summon or prosecution was received in this reporting period.
- A.13 No reporting changes were revised in this reporting period.
- A.14 A summary of the construction activities to be undertaken in the in the next reporting month is listed below:

### **Construction Activities to be undertaken**

• Diaphragm wall construction

### 1. BASIC PROJECT INFORMATION

- 1.1. Central Kowloon Route (CKR) is a 4.7 km long dual 3-lane trunk road in Central Kowloon linking Yau Ma Tei Interchange in West Kowloon with the road network on Kai Tak Development and Kowloon Bay in East Kowloon.
- 1.2. The Central Kowloon Route Design and Construction Environmental Impact Assessment Report (Register No.: AEIAR-171/2013) was approved with conditions by the Environmental Protection Department (EPD) on 11 July 2013. An Environmental Permit (EP 457/2013) was issued on 9 August 2013. Variations of EP (VEP) was subsequently applied for and the latest EP (EP-457/2013/C) was issued by EPD on 16 January 2017.
- 1.3. The construction of the CKR had been divided into different sections. This Contract No. HY/2014/09 Ho Man Tin Access Shaft (HMTS) ("The Project") covers part of the construction activities located at Ho Man Tin under the EP which includes:
  - Central Portion
    - i. Decant of Housing Authority Mock Up Centre and Site Establishment
    - ii. Diaphragm Walls Construction
    - iii. Excavation of Vertical Access Shaft approximately 100m deep and 21m internal diameter

The alignment and works area for the Contract No. HY/2014/09 - are shown in Appendix A.

1.4. A summary of the major construction activities undertaken in this reporting period is shown in Table 1.1. The construction programme is presented in Appendix B.

Table 1.1 Summary of the construction Activities Undertaken during the Reporting Month.

### **Construction Activities undertaken**

- Diaphragm wall construction
- 1.5. There are no updates on the scope of works and construction methodologies.
- 1.6. The project organisational chart specifying management structure and contact details are shown in Appendix C.
- 1.7. A summary of the valid permits, licences, and /or notifications on environmental protection for this Project is presented in Table 1.2

Table 1.2 Summary of the Status of Valid Environmental Licence, Notification, Permit and Documentations

Permit/ Licences/ Notification	Reference	Validity Period	Remarks
<b>Environmental Permit</b>	EP- 457/2013/C	Throughout the Contract	Permit granted on 16 January 2017
Notification of Construction Works under the Air Pollution Control (Construction Dust) Regulation (Form NA)	428806	Throughout the Contract	Notification issued on 18/12/ 2017
Wastewater Discharge Licence	WT00030288-2018	Until 28/02/2023	Licence granted on 14/02/2018
Chemical Waste Producer Registration	WPN5111-236-N2345-03	Throughout the Contract	Registration complete on 19/12/2017
Construction Noise Permit	-	-	CNP application was submitted on 29/06/2018
Billing Account for Disposal of Construction Waste	7029654	Throughout the Contract	Account granted on 22/12/2017

### 2. ENVIRONMENTAL STATUS

2.1. Environmental permit (EP) conditions under the EIAO, submission status under the EP and implementation status of mitigation measures had been reviewed and implemented on schedule. The status of required submissions under the EP (EP-457/2013/C) as of the reporting period for the Project are summarised in Table 2.1

Table 2.1 Summary of Status of Required Submission for EP-457/2013/C for the Project

EP Condition (EP-457/2013/C)	Submission	Submission date
Condition 1.12	Notification of Commencement Date of Construction of the Project	1 February 2018
Condition 2.3	Community Liaison Group	5 January 2018
Condition 2.4	Management organisation of the main construction companies	22 December 2017
Condition 2.5	Construction Programme and EP	08 January 2018 / 18 January
Collation 2.5	Submission Schedule	2018
Condition 2.6	Design Drawing	08 January 2018
Condition 2.8	Landscape Mitigation Plan	12 January 2018
Condition 2.9	Construction Noise Mitigation Plan (CNMMP)	15 February 2018
Condition 3.3	Baseline Monitoring Report	1 February 2018
Condition 3.4	EM&A Monthly Report (May 2018)	12 June 2018

2.2. Details of the major construction activities undertaken in this reporting period are shown in Table 2.2.

Table 2.2 Summary of the construction Activities Undertaken during the Reporting Month.

<b>Location of works</b>	Construction activities undertaken	Rer	narks	on p	rogre	SS
Portion 1 A	<ul> <li>Diaphragm wall construction</li> </ul>	•5	out	of	22	panels
	-	completed				

2.3. The drawing showing the project are, environmental sensitive receivers and the location of the monitoring station are attached in Appendix A and Appendix K. Co-ordinates of the monitoring location is shown in below:

SKH Tsoi Kung Po Secondary School (M-A3 / M-N3) under HK80 Geographical Coordinates – Latitude: 22.314719, Longitude: 114.180694

### 3. MONITORING RESULTS

3.1. Monitoring Parameters

### **Air Quality**

- 3.1.1. The impact monitoring had been carried out in accordance with section 5.8 of the approved EM&A Manual to determine the 1-hour and 24-hour total suspended particulates (TSP) levels at the monitoring location in the reporting report.
- 3.1.2. The sampling frequency of at least once in every 6 days, shall be strictly observed at the monitoring station for 24-hour TSP monitoring. For 1-hour TSP monitoring, the sampling frequency of at least 3 times in every 6 days should be undertaken when the highest dust impact occurs.
- 3.1.3. General meteorological conditions (wind speed, direction and precipitation) and notes regarding any significant adjacent dust producing sources had also been recorded throughout the impact monitoring period.

### Noise

- 3.1.4. Construction noise level shall be measured in terms of the A-weighted equivalent continuous sound pressure level ( $L_{eq}$ ).  $L_{eq}$  (30min) shall be used as the monitoring parameter for the time period between 0700 and 1900 hours on normal weekdays.
- 3.1.5. For all other time periods,  $L_{eq}$  (5min) shall be employed for comparison with the Noise Control Ordinance (NCO) criteria.
- 3.1.6. As supplementary information for data auditing, statistical results such as  $L_{10}$  and  $L_{90}$  shall also be obtained for reference.
- 3.2. Monitoring Equipment

### **Air Quality**

- 3.2.1. 1-hour TSP levels and 24-hour TSP had been measured with direct reading dust meter and High Volume Samplers respectively. It has been demonstrated its capability in achieving comparable results with high volume sampling method as set out in the Title 40 of the Code of Federal Regulations, Chapter 1 (Part 50).
- 3.2.2. The 1-hour TSP meter was calibrated by the manufacturer prior to purchasing. Zero response of the instrument was checked before and after each monitoring event. Operation of the 1-hour TSP meter followed manufacturer's Operation and Service Manual. The 24-hour TSP meter was calibrated against firmware 80570-8100-V1.0.4, annually. Operation of the 24-hour TSP meter followed manufacturer's Operation and Service Manual. Valid calibration certificate of dust monitoring equipment is attached in Appendix H.

- 3.2.3. A summary of the equipment that was deployed for the 24- hour averaged monitoring is shown in Table 3.1. The TSP monitoring was conducted as per the schedule presented in Appendix G.
- 3.2.4. The equipment used for 1-hour TSP and 24-hour TSP measurement and calibration are summarised in Table 3.1

There exist constitution 2 ast information 8 = quipment				
Monitoring Parameter	Monitoring Equipment	Serial Number	Date of Calibration	
1-hour TSP	TSI 8532 Laser Dust Monitor	8532114409	20 Dec 2017	
24-hour TSP	TE-5170X High Volume Sampler	1048	29 May 2018,	
			15June 2018	
	TE-5025 Calibration Kit	3465	2 Feb 2018	

Table 3.1 Construction Dust Monitoring Equipment

### Noise

- 3.2.5. Sound level meter in compliance with the International Electrotechnical Commission Publications 651: 1979 (Type 1) and 804: 1985 (Type 1) specifications has been used for carrying out the noise monitoring. The sound level meter has been checked using an acoustic calibrator. The wind speed and other metrological data has been recorded from Hong Kong Observatory- King's Park meteorological station, along with portable wind speed meter stand by as back up if malfunction occurred or data was not recorded from HKO.
- 3.2.6. An acoustic calibrator and sound level meter using for the monitoring is within the valid period and were calibrated per year. Valid calibration certificate of noise monitoring equipment is attached in Appendix I.
- 3.2.7. The details of equipment using for monitoring are listed in Table 3.2, as below:

racio 3.2 Monitoring Eduspinent esec in Monitoring			
Monitoring Equipment	Serial Number	Date of Calibration	
Nti XL2 Sound Level Meter	A2A-09696-E0	3 Nov 2017	
Pulsar 105 Acoustic Calibrator	63705	17 Sep 2017	

Table 3.2 Monitoring Equipment Used in Monitoring

3.3. Monitoring Methodology and QA/QC results

### **Air Quality**

- 3.3.1. The 1-hour TSP monitor, portable dust meter (TSI Dust Trak Aerosol Monitor Model 8532) was used for the impact monitoring. The 1-hour TSP meter provides a real time 1-hour TSP measurement based on 90° light scattering. Three 1-hour TSP level were logged per every six days.
- 3.3.2. The 24-hour TSP monitor, High Volume Sampler (Tisch TE 5170 High Volume Air Sampler) was used for the impact monitoring. The 24-hour TSP monitoring consists of the following:
  - ◆ The HVS was set at the monitoring location, with electricity supply connected and secured;

- ♦ HVS was calibrated before commencing the 1<sup>st</sup> measurement;
- ◆ The filter paper was weight and provided by HOKLAS lab (Acumen Laboratory and Testing Limited and ALS Technichem (HK) Pty Ltd) before and after the sampling. Certificate of HOKLAS accredited laboratory can be referred to Appendix J;
- ◆ The airflow over time during sampling process was recorded by the HVS.
- 3.3.3. HVS was free- standing with no obstruction. The following criteria were considered in the installation of the HVS:
  - ◆ Appropriate support to secure the samples against gusty wind needed to be provided the monitoring station;
  - ◆ A minimum of 2m separation from walls, parapets and penthouses was required for rooftop samplers;
  - ◆ No furnace or incinerator flues was nearby;
  - ◆ Airflow around the sampler was unrestricted; and
  - Permission could be obtained to set up the samplers and gain access to the monitoring station.

### 3.3.4. Preparation of Filter Papers

- Glass fiber filters were labelled and sufficient filters that were clean and without pinholes were selected;
- ◆ All filters were equilibrated in the conditioning environment for 24 hours before weighing. The conditioning environment temperature was around 25°C and not varied by more than ±3°C; the relative humidity (RH)was 40%; and
- ◆ Acumen Laboratory and Testing Limited and ALS Technichem (HK) Pty Limited, as HOKLAS accredited laboratory, implemented comprehensive quality assurance and quality control programmes on the filters.

### 3.3.5. Field Monitoring

- The power supply was checked to ensure that the HVS was working properly;
- ◆ The filter holder and area surrounding the filter were cleaned;
- ◆ The filter holder was removed by loosening the foul bolts and a new filter, with stamped number upward, on a supporting screen was aligned carefully;
- ◆ The filter was properly aligned on the screen so that the gasket formed an airtight seal on the outer edges of the filter;
- ◆ The swing bolts were fastened to hold the filter holder down to the frame. The pressure applied should be sufficient to avoid air leakage at the edges;
- ◆ The shelter lid was closed and secured with an aluminum strip;
- ◆ The HVS was warmed- up for about 5 minutes to establish run- temperature conditions;
- ◆ A new flow rate record sheet was inserted into the flow recorder;
- The flow rates of the HVS was checked and adjusted to between  $1.22-1.37^{m^3min^{-3}}$ , which was within the range specified in the EM&A Manual (i.e.  $0.6-1.7^{m^3min^{-3}}$ );
- ◆ The programmable timer was set for a sampling period of 24 hours ±hour, and the starting time, weather condition and filter number were recorded;
- ◆ The initial elapsed time was recorded;
- ◆ At the end of sampling, the sampled filter was removed carefully and folded in half so that only surfaces with collected particulate matter were in contact;

- ◆ The filter paper was placed in a clean plastic envelope and sealed; all monitoring information was recorded on a standard data sheet and
- ◆ The filters were sent to (Acumen Laboratory and Testing Ltd and ALS Technichem (HK) Pty Ltd) for analysis.

### 3.3.6. Maintenance and Calibration

- ◆ The HVS and their accessories were maintained in a good working condition. For example, motor brushes were replaced routinely and electrical wiring was checked to ensure a continuous power supply; and
- ♦ The flow rate of each HVS with mass flow controller was calibrated using an orifice calibrator, Initial calibrations of the dust monitoring equipment were conducted upon installation and prior to commissioning. Five- point calibration was carried out for HVS using TE-5025 Calibration Kit. HVS is calibrated bimonthly. The calibration records for the HVS is given in Appendix H.

### 3.3.7. Wind Data Monitoring

◆ The wind speed has been recorded from Hong Kong Observatory- King's Park meteorological station, along with portable wind speed meter stand by as back up if malfunction occurred or data was not recorded from HKO

### Noise

- 3.3.8. All noise measurements by the meter were set to FAST response and on the A-weighted equivalent continuous sound pressure level ( $L_{eq}$ ) in decibels dB(A).  $L_{Aeq(30min)}$  was used as the monitoring metric for the time period between 0700 –1900 hours on normal weekdays. The measured noise levels were logged every 5 minutes throughout the monitoring period.
- 3.3.9. Prior to the noise measurement, the accuracy of the sound level meter was checked using an acoustic calibrator generating a known sound pressure level at a known frequency. Checking was conducted before and after the monitoring. The calibration level before and after the noise measurement is agreed to within 1.0 dB.
- 3.3.10. Noise measurements should not be made in presence of fog, rain, wind with a steady speed exceeding 5 ms<sup>-1</sup> or wind with gusts exceeding 10 ms<sup>-1</sup>. The wind speed was checked with a portable wind speed meter capable of measuring with speeds in ms<sup>-1</sup>.

### 3.4. Monitoring Location

### **Air Quality**

3.4.1. In order to identify and seek for the access of the dust monitoring locations designated in the EM&A Manual, site visit was conducted by ET. During the site visit, the original proposed monitoring location was declined by the management office of Ko Fai House, Kwun Fai Court due to the set-up of equipment on the rooftop and the middle level of building. Alternative air monitoring station had been proposed by ET and approved by IEC before the baseline monitoring started. 1 designated monitoring location was identified and agreed with IEC and EPD. Details of air monitoring station are described in Table 3.3. The location plan of air quality monitoring station is shown in Appendix K.

Table 3.3 Location of the Dust Monitoring Station

Air Quality Monitoring Station	Dust Monitoring Station
M-A3	SKH Tsoi Kung Po Secondary School

### **Noise**

3.4.2. According to the EM&A Manual, construction noise impact monitoring should be conducted at designated monitoring station. In order to the access to some of the proposed monitoring locations stated in the EM&A Manual was either rejected or unavailable, alternative location was proposed and agreed by the ER. IEC and EPD. The details of construction noise monitoring location are listed in Table 3.4 and shown in Appendix K along with location of noise sensitive receivers (NSRs) related to this Works Contract.

Table 3.4 Noise Monitoring Station

Noise Monitoring Station	Identified Noise Monitoring Station	Type of Measurement
M-N3	SKH Tsoi Kung Po Secondary School	Façade

- 3.5. Monitoring date, time, frequency and duration
- 3.5.1. A summary of impact monitoring duration, sampling parameter and frequency is presented in Table 3.5.

Table 3.5: Summary of Impact Monitoring Programme

Impact Monitoring	Duration	Sampling Parameter	Frequency
Dust	1-hour continuous measurement	1-hour TSP	3 times per six days
Dust	24-hour continuous sampling	24-hour TSP	Once per six days
Noise	30-minute continuous measurement	$$L_{\rm eq}$_{30min},$$L_{10}$ and $L_{90}$ as reference.$	Once L <sub>eq 30 min</sub> from 0700 – 1900 per seven days

### 3.6. Result Summary

### **Air Quality**

3.6.1. According to our field observations, the major dust source identified at the designated air quality monitoring station in the reporting month are summarised in Table 3.6

Table 3.6 Observation at Dust Monitoring Station

Monitoring Station	Major Dust Source
M-A3	No obvious dust emission was observed

3.6.2. Air quality impact monitoring for the reporting month was carried out on 4,9,15,21 and 27 June 2018. The results for 1-hour TSP and 24-hour TSP are summarized in Table 3.7 and Table 3.8. The measurement data and details of influencing factors such as weather conditions and site observation are presented in Appendix L.

Table 3.7 Summary of 1-hour TSP Monitoring Results

<b>Monitoring Location</b>	Range(µg/m3)	Action Level(µg/m3)	Limit Level(µg/m3)
M-A3	49 - 113	333	500

Table 3.8 Summary of 24-hour TSP Monitoring Results

<b>Monitoring Location</b>	Range(µg/m3)	Action Level(µg/m3)	Limit Level(µg/m3)
M-A3	7 - 17	153	260

### **Noise**

3.6.3. According to our field observations, the major noise source identified at the designated noise monitoring station in the reporting month are summarised in Table 3.9:

Table 3.9 Observation at Noise Monitoring Station

Monitoring Station	Major Noise Source
M-N3	Traffic, School activity

3.6.4. The construction noise impact monitoring for the reporting month was carried out on 4,9,15,21 and 27 June 2018. The measurement data are shown in Appendix M and summarized in Tables 3.10:

Table 3.10 Summary of Noise Monitoring Results –M-N3

Time Period	Parameter	Range, dB(A)				
		$\mathbf{L}_{\mathbf{eq}}$	$L_{10}$	$L_{90}$		
Normal working hour from 0700-1900	Leq 30min	62.6 – 64.3	64.1 – 65.9	57.4 – 60.6		

### 3.7. Waste management

3.7.1. The waste generated from this Project includes inert construction and demolition (C&D) materials, and non-inert C&D materials. Non-inert C&D materials are made up of general refuse, vegetative wastes and recyclable wastes such as plastics and paper/cardboard packaging waste. Steel materials generated from the project are also grouped into non-inert C&D materials as the materials were not disposed of with other inert C&D materials. With reference to relevant handling records and trip tickets of this Project, the quantities of different types of waste generated in the reporting month are summarised in Table 3.11. Details of cumulative waste management data are presented as a waste flow table in Appendix N.

Table 3.11 Quantities of waste generated from the Project

			Quantity	y		
			No	on-inert C&D Materia	nls	
Reporting period	Inert C&D  Materials	Chemical Waste	Others, e.g. General Refuse disposed at	Recycled materials		
	(in '000m3)	(in '000kg)	Landfill	Paper/card board (in '000kg)		Metals (in '000kg)
Jun-18	1.218	0.000	0.006	0.000	0.000	0.000

# 4. SUMMARY OF COMPLAINTS, NOTIFICATION OF SUMMONS AND PROSECUTIONS

4.1. The Environmental Complaint Handling Procedure is shown in below Table 4.1:

Table 4.1 Environmental Complaint Handling Procedure

Table 4.1 Environmental Complaint Handling Hoccure				
Complaint Received via Project Hotli	ne Complaint Received via 1823 or from other			
	government departments			
Contractor notify ER, ET and IEC	ER notify Contractor, ET and IEC			
Contractor log complaint and date of	receipt onto the complaint database. Contractor, ER and ET to			
cond	uct investigation of complaint			
If complaint is considered not valid	If complaint is found valid			
ET or ER to reply the complainant if i	necessary Contractor to identify and implement remedial			
	measures in consultation with the IEC, ET and			
	ER.			
	The ER, ET and IEC to review the effectiveness			
	of the Contractor's remedial measures and the			
	updated situation; ET to undertake additional			
	monitoring and audit to verify the situation if			
	necessary, and oversee that circumstances leading			
	to the complaint do not recur. ER to conduct			
	further inspection as necessary.			
If the complaint is referred by the El	PD, the Contractor to prepare interim report on the status of the			
complaint investigation and follow-u	p actions stipulated above, including the details of the remedial			
measures and additional monitoring	identified or already taken, for submission to EPD within the			
tim	e frame assigned by the EPD			
The ET to record the details of the cor	uplaint, results of the investigation, subsequent actions taken to			

The ET to record the details of the complaint, results of the investigation, subsequent actions taken to address the complaint and updated situation including the effectiveness of the remedial measures, supported by regular and additional monitoring results in the monthly EM&A reports

- 4.2. Should non-compliance of the criteria occur, action in accordance with the Action Plan in Appendix D and Appendix E shall be carried out.
- 4.3. No exceedance of the Action and Limit Levels of the regular construction noise was recorded during the reporting period
- 4.4. No exceedance of the Action and Limit Level of 1-hour TSP and 24-hour TSP monitoring was recording during the reporting period.
- 4.5. No environmental complaint were received in the reporting period.
- 4.6. No notification of summons and prosecution was received in the reporting period.
- 4.7. Statistics on complaints, notifications of summons and successful prosecutions are summarized in Appendix O.

### 5. EM&A SITE INSPECTION

- 5.1. Site inspections were carried out on a weekly basis to monitor the implementation of proper environmental pollution control and mitigation measures under the Contract. In the reporting period, four (4) site inspections were carried out on 6,13,20 and 27 June 2018, along with bi-weekly inspection of the implementation of landscape and visual mitigation measures conducted on 6 and 20 June 2018.
- 5.2. One joint site inspection with IEC also undertaken on 13 June 2018. Minor deficiencies were observed during weekly site inspection or joint site inspection. Key observations during the site inspections are summarized in Table 5.1.

Date	Environmental Observations	Follow-up Status		
6 Jun 2018	No Observations and Recommendations	-		
	Observation(s) and Recommendation(s)	1. Plug was inserted to drip tray		
13 Jun 2018	1. Drip tray for a generator near site office	for a generator near si		
	was found without plug.	office to prevent leakage.		
	Observation(s) and Recommendation(s)	1. Plug was inserted to drip tray		
20 Jun 2018	1. Drip tray for a generator near site office	for a generator near site		
	was found without plug.	office to prevent leakage.		
27 Jun 2018	No Observations and Recommendations	-		

Table 5.1 Site Observations

- 5.3. The Contractor has rectified all of the observations identified during environmental site inspections in the reporting period
- 5.4. According to the EIA Study Report, Environmental Permit, contract documents and EM&A Manual, the mitigation measures detailed in the documents are implemented as much as practical during the reporting period. An updated Implementation Status of Environmental Mitigation Measures (EMIS) is provided in Appendix F.

### 6. FUTURE KEY ISSUES

- 6.1. Work to be undertaken in the next reporting month are:
  - Diaphragm wall construction


Potential environmental impacts arising from the above construction activities are mainly associated with dust, construction noise and waste management.

- 6.2. The tentative schedule of regular construction noise monitoring, 1-hour TSP and 24-hour TSP monitoring in the next reporting period is presented in Appendix P. The regular construction noise monitoring, 1-hour TSP monitoring 24-hour TSP monitoring will be conducted at the same monitoring location in the next reporting period.
- 6.3. The construction programme for the Project for the next reporting month is presented in Appendix B.

### 7. CONCLUSION AND RECOMMENDATIONS

- 7.1. This 5<sup>th</sup> monthly Environmental Monitoring and Audit (EM&A) Report presents the EM&A works undertaken during the period from 1 June 2018 to 30 June 2018 in accordance with the EM&A Manual and the requirement under EP- 457/2013/C
- 7.2. Air quality (including 1-hour TSP and 24-hour TSP) and noise impact monitoring were carried out in the reporting period. All monitoring results are satisfactory. No exceedance of the Action and Limit Level was recorded during the reporting period.
- 7.3. Weekly environmental site inspections were conducted during the reporting period. Joint site inspection with IEC were carried out on 13 June 2018. Minor deficiencies were observed during site inspection and were rectified within the specified deadlines. The environmental performance of the Project was therefore considered satisfactory.
- 7.4. No environmental complaint was received in the reporting period.
- 7.5. No notification of summons or prosecution was received since commencement of the Contract.
- 7.6. The ET will keep track on the construction works to confirm compliance of environmental requirements and the proper implementation of all necessary mitigation measures.

Monthly Environmental Monitoring & Auditing Report Contract No. HY/2014/09 Central Kowloon Route – Ho Man Tin Access Shaft
Appendix A
Alignment and Works Area For the Contract No.
HY/2014/09

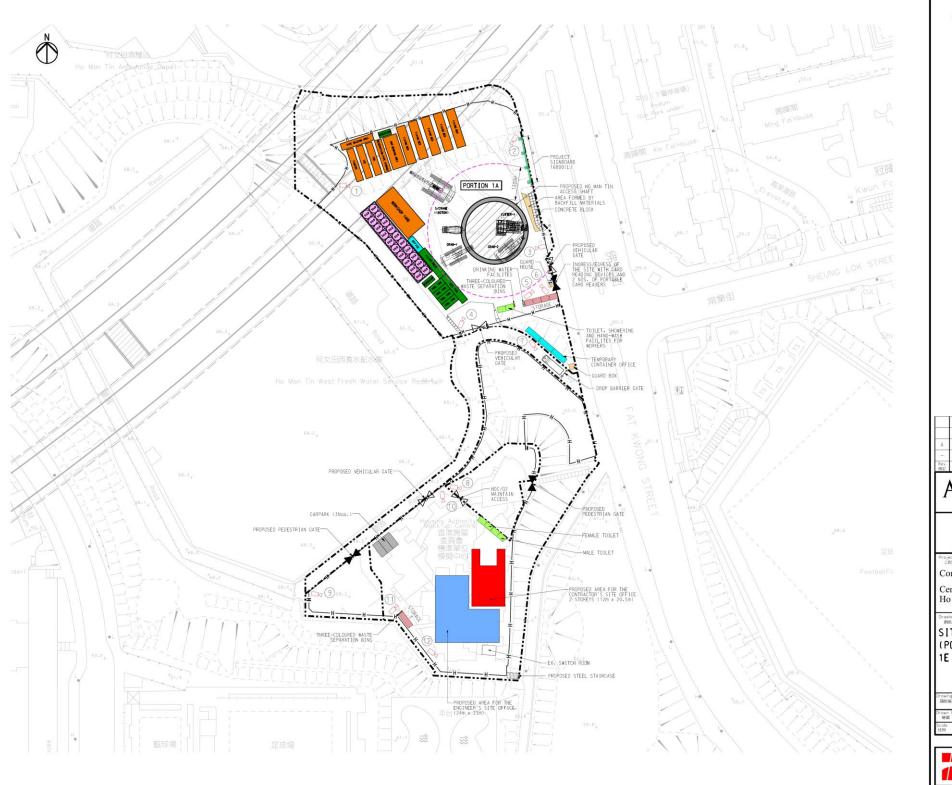


LEGENDS:





-	FIRST ISSUE Description	JK	11/12/17
n	Transaction of Industrial		
A	SECOND [SSUE	JK	20/12/17







Contract No. HY/2014/09

Central Kowloon Route -Ho Man Tin Access Shaft

SITE LAYOUT PLAN (PORTION 1A.1B.1C.1D. 1E & 1F)

Drowing no 国抵賴號	NCC/	NCC/HMTS/01/0001				
Drawn By 绘図	TC	Checked E 後核	JK	Approve 批准。	d By A OI	
Scale tt/M	1:1000 @	A3	Status 聯段	WORK	WORK [NG	
	_	CODVDICE	T DESERV	/ED		




路 政 署 HIGHWAYS DEPARTMENT 主要工程管理處 MAJOR WORKS PROJECT MANAGEMENT OFFICE

Monthly Environmental Monitoring & Auditing Report Contract No. HY/2014/09 Central Kowloon Route – Ho Man Tin Access Shaft
Appendix B
Construction Programme




### Contract No. HY/2014/09

### Central Kowloon Route - Ho Man Tin Access SWork Programme

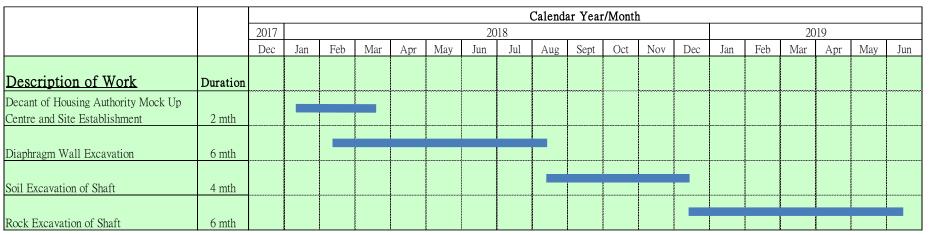

Monthly Environmental Monitoring & Auditing Report Contract No. HY/2014/09 Central Kowloon Route – Ho Man Tin Access Shaft
A consending C
Appendix C
Project Organization Chart

### **Project O-Chart**

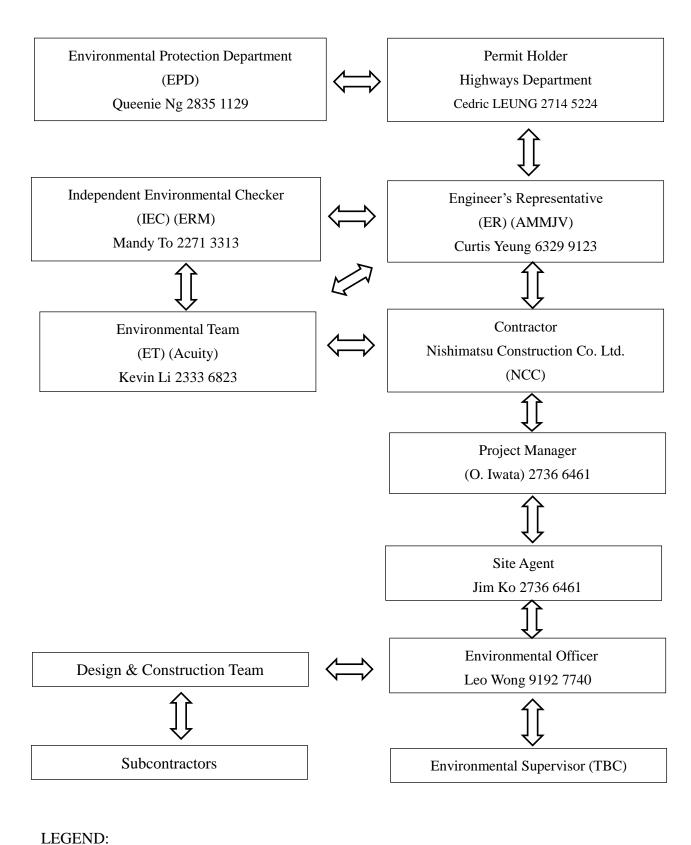

LEGEND.

Monthly Environmental Monitoring & Auditing Report Contract No. HY/2014/09 Central Kowloon Route – Ho Man Tin Access Shaft
A managadist D
Appendix D
Dust Event-Action Plan (EAP)

EVENT	ACTION							
EVENI	ET	IEC	ER	CONTRACTOR				
ACTION LEV	ACTION LEVEL							
1.Exceedance for one sample	<ol> <li>Identify source, investigate the causes of exceedance and propose remedial measures;</li> <li>Inform IEC and ER;</li> <li>Repeat measurement to confirm finding;</li> <li>Increase monitoring frequency to daily.</li> </ol>	<ol> <li>Check monitoring data submitted by ET;</li> <li>Check Contractor's working method.</li> </ol>	1. Notify Contractor.	<ol> <li>Rectify any unacceptable practice;</li> <li>Amend working methods if appropriate.</li> </ol>				
2.Exceedance for two or more consecutive samples	<ol> <li>Identify source;</li> <li>Inform IEC and ER;</li> <li>Advise the ER on the effectiveness of the proposed remedial measures;</li> <li>Repeat measurements to confirm findings;</li> <li>Increase monitoring frequency to daily;</li> <li>Discuss with IEC and Contractor on remedial actions required;</li> <li>If exceedance continues, arrange meeting with IEC and ER;</li> <li>If exceedance stops, cease additional monitoring.</li> </ol>	<ol> <li>Check monitoring data submitted by ET;</li> <li>Check Contractor's working method;</li> <li>Discuss with ET and Contractor on possible remedial measures;</li> <li>Advise the ET on the effectiveness of the proposed remedial measures;</li> <li>Supervise Implementation of remedial measures.</li> </ol>	Confirm receipt of notification of failure in writing;     Notify Contractor;     Ensure remedial measures properly implemented.	<ol> <li>Submit proposals for remedial to ER within 3 working days of notification;</li> <li>Implement the agreed proposals;</li> <li>Amend proposal if appropriate.</li> </ol>				
LIMIT LEVEL	LIMIT LEVEL							
1.Exceedance for one sample	Identify source, investigate the causes of exceedance and propose remedial measures;     Inform ER, Contractor and	<ol> <li>Check monitoring data submitted by ET;</li> <li>Check Contractor's working method;</li> </ol>	Confirm receipt of notification of failure in writing;     Notify Contractor;	Take immediate action to avoid further exceedance;     Submit proposals for remedial actions to IEC				

EVENT	ACTION					
EVENI	ET	IEC	ER	CONTRACTOR		
	<ul> <li>EPD;</li> <li>3. Repeat measurement to confirm finding;</li> <li>4. Increase monitoring frequency to daily;</li> <li>5. Assess effectiveness of Contractor's remedial actions and keep IEC, EPD and ER informed of the results.</li> </ul>	<ul> <li>3. Discuss with ET and Contractor on possible remedial measures;</li> <li>4. Advise the ER on the effectiveness of the proposed remedial measures;</li> <li>5. Supervise implementation of remedial measures.</li> </ul>	3. Ensure remedial measures properly implemented.	within 3 working days of notification; Implement the agreed proposals; 4. Amend proposal if appropriate.		
2.Exceedance for two or more consecutive samples	<ol> <li>Notify IEC, ER, Contractor and EPD;</li> <li>Identify source;</li> <li>Repeat measurement to confirm findings;</li> <li>Increase monitoring frequency to daily;</li> <li>Carry out analysis of Contractor's working procedures to determine possible mitigation to be implemented;</li> <li>Arrange meeting with IEC and ER to discuss the remedial actions to be taken;</li> <li>Assess effectiveness of Contractor's remedial actions and keep IEC, EPD and ER informed of the results;</li> <li>If exceedance stops, cease additional monitoring.</li> </ol>	<ol> <li>Discuss amongst ER, ET, and Contractor on the potential remedial actions;</li> <li>Review Contractor's remedial actions whenever necessary to assure their effectiveness and advise the ER accordingly;</li> <li>Supervise the implementation of remedial measures.</li> </ol>	<ol> <li>Confirm receipt of notification of failure in writing;</li> <li>Notify Contractor;</li> <li>In consultation with the IEC, agree with the Contractor on the remedial measures to be implemented;</li> <li>Ensure remedial measures properly implemented;</li> <li>If exceedance continues, consider what portion of the work is responsible and instruct the Contractor to stop that portion of work until the exceedance is abated.</li> </ol>	<ol> <li>Take immediate action to avoid further exceedance;</li> <li>Submit proposals for remedial actions to IEC within 3 working days of notification;</li> <li>Implement the agreed proposals;</li> <li>Resubmit proposals if problem still not under control;</li> <li>Stop the relevant portion of works as determined by the ER until the exceedance is abated.</li> </ol>		

Note:

ET – Environmental Team

ER – Engineer's Representative

IEC – Independent Environmental Checker

	9 Central Kowloon Ro			
Appendix	F			
Appendix	ت			
Ioiga Erra	nt Astion	Dlon (E	A D)	
Noise Eve	nt-Action	i Pian (E	(AP)	

EVEN T	ACTION					
	ET	IEC	ER	CONTRACTOR		
Action Level	<ol> <li>Identify source, investigate the causes of exceedance and propose remedial measures;</li> <li>Notify IEC and Contractor;</li> <li>Report the results of investigation to the IEC, ER and Contractor;</li> <li>Discuss with the Contractor and formulate remedial measures;</li> <li>Increase monitoring frequency to check mitigation effectiveness.</li> </ol>	<ol> <li>Review the analysed results submitted by the ET;</li> <li>Review the proposed remedial measures by the Contractor and advise the ER accordingly;</li> <li>Supervise the implementation of remedial measures.</li> </ol>	<ol> <li>Confirm receipt of notification of failure in writing;</li> <li>Notify Contractor;</li> <li>Require Contractor to propose remedial measures for the analysed noise problem;</li> <li>Ensure remedial measures are properly implemented</li> </ol>	<ol> <li>Submit noise mitigation proposals to IEC;</li> <li>Implement noise mitigation proposals.</li> </ol>		
Limit Level	<ol> <li>Identify source;</li> <li>Inform IEC, ER, EPD and Contractor;</li> <li>Repeat measurements to confirm findings;</li> <li>Increase monitoring frequency;</li> <li>Carry out analysis of Contractor's working procedures to determine possible mitigation to be implemented;</li> </ol>	<ol> <li>Discuss amongst ER, ET, and Contractor on the potential remedial actions;</li> <li>Review Contractors remedial actions whenever necessary to assure their effectiveness and advise the ER accordingly;</li> <li>Supervise the implementation of remedial measures.</li> </ol>	<ol> <li>Confirm receipt of notification of failure in writing;</li> <li>Notify Contractor;</li> <li>Require Contractor to propose remedial measures for the analysed noise problem;</li> <li>Ensure remedial measures properly implemented;</li> </ol>	<ol> <li>Take immediate action to avoid further exceedance;</li> <li>Submit proposals for remedial actions to IEC within 3 working days of notification;</li> <li>Implement the agreed proposals;</li> <li>Resubmit proposals if problem still not under control;</li> <li>Stop the relevant portion of works as determined by the ER</li> </ol>		

EVEN T	ACTION						
	ET	IEC	ER	CONTRACTOR			
	6. Inform IEC, ER and EPD the		5. If exceedance continues,	until the exceedance is abated.			
	causes and actions taken for the		consider what portion of the				
	exceedances;		work is responsible and				
	7. Assess effectiveness of		instruct the Contractor to				
	Contractor's remedial actions and		stop that portion of work				
	keep IEC, EPD and ER informed		until the exceedance is				
	of the results;		abated.				
	8. If exceedance stops, cease						
	additional monitoring.						

### Note:

ET – Environmental Team

IEC – Independent Environmental Checker

ER – Engineer's Representative

	09 Central Kowloon Route – Ho		
	<del></del>		
Appendix	F		
Znrigona	antal Mitigati	on Implement	totion
CHVIIOIIII	emai whugau	on Implement	lauon
Schedule	(FMIS)		
Jenedule	(LIVIIS)		

## Environmental Mitigation Implementation Schedule – Contract No. HY/2014/09 (Ho Man Tin Access Shaft)

EIA Ref.	EM&A Log Ref.	Recommended Mitigation Measures	Objectives of the Recommender Measures & Ma Concerns to address	d Impl	elementation Agent	Location / Timing	Implementation Stage	Requirements and/ or standards to be achieved
		C	onstruction Dust	Impact				
S4.3.10	D1	The contractor shall follow the procedures and requirements	Minimize dı	ust Conti	tractor	All	Construction stage	• APCO
		given in the Air Pollution Control (Construction Dust) Regulation	impact at t	he		construction		• To control the
			nearby sensiti	ive		sites		dust impact To
			receivers					meet HKAQO and
								TM-EIA criteria
S4.3.10	D2	Mitigation measures in form of regular watering under a good	Minimize du	ust Conti	tractor	All	Construction stage	• APCO
		site practice should be adopted. Watering once per hour on	impact at t	he		construction		• To control the
		exposed worksites and haul road should be conducted to	nearby sensiti	ive		sites		dust impact To
		achieve dust removal efficiencies of 91.7%. While the above	receivers					meet HKAQO and
		watering frequencies are to be followed, the extent of						TM-EIA criteria
		watering may vary depending on actual site conditions but						
		should be sufficient to maintain an equivalent intensity of no						
		less than 1.3 $L/m^2$ to achieve the dust removal efficiency.						

EIA Ref.	EM&A Log Ref.	Recommended Mitigation Measures	Recom Measure Conc	ves of the mended es & Main erns to dress	Implementation Agent	Location / Timing	Implementation Stage	Requirements and/ or standards to be achieved
S4.3.10	D3	• Proper watering at exposed spoil should be undertaken	Minimize	dust	Contractor	All	Construction stage	• APCO
		throughout the construction phase;	impact	at the		construction		• To control the
		•Any excavated or stockpile of dusty material should be covered	nearby	sensitive		sites		dust impact To
		entirely by impervious sheeting or sprayed with water to	receivers					meet HKAQO and
		maintain the entire surface wet and then removed or						TM-EIA criteria
		backfilled or reinstated where practicable within 24 hours of						
		the excavation or unloading;						
		•Any dusty materials remaining after a stockpile is removed						
		should be wetted with water and cleared from the surface of						
		roads;						
		•A stockpile of dusty material should not be extended beyond the						
		pedestrian barriers, fencing or traffic cones;						
		•The load of dusty materials on a vehicle leaving a construction						
		site should be covered entirely by impervious sheeting to						
		ensure that the dusty materials do not leak from the vehicle.						
		•Where practicable, vehicle washing facilities with high pressure						
		water jet should be provided at every discernible or						

EIA Ref.	EM&A Log Ref.	Recommended Mitigation Measures	Objectives of the Recommended Measures & Main Concerns to address	Implementation Agent	Location / Timing	Implementation Stage	Requirements and/ or standards to be achieved
		designated vehicle exit point. The area where vehicle					
		washing takes place and the road section between the					
		washing facilities and the exit point should be paved with					
		concrete, bituminous materials or hardcores;					
		•When there are open excavation and reinstatement works,					
		hoarding of not less than 2.4m high should be provided and					
		properly maintained as far as practicable along the site					
		boundary with provision for public crossing. Good site					
		practice shall also be adopted by the Contractor to ensure					
		the conditions of the hoardings are properly maintained					
		throughout the construction period;					
		•The portion of any road leading only to construction site that is					
		within 30m of a vehicle entrance or exit should be kept clear					
		of dusty materials;					
		•Surfaces where any pneumatic or power-driven drilling, cutting,					
		polishing or other mechanical breaking operation takes place					
		should be sprayed with water or a dust suppression chemical					

EIA Ref.	EM&A Log Ref.	Recommended Mitigation Measures	Objectives of the Recommended Measures & Main Concerns to address	Implementation Agent	Location / Timing	Implementation Stage	Requirements and/ or standards to be achieved
		<ul> <li>Any area that involves demolition activities should be sprayed with water or a dust suppression chemical immediately prior to, during and immediately after the activities so as to maintain the entire surface wet;</li> <li>Any skip hoist for material transport should be totally enclosed by impervious sheeting;</li> <li>Every stock of more than 20 bags of cement or dry-pulverised fuel ash (PFA) should be covered entirely by impervious sheeting or placed in an area sheltered on the top and the 3 sides;</li> <li>Loading, unloading, transfer, handling or storage of bulk cement or dry PFA should be carried out in a totally enclosed system or facility, and any vent or exhaust should be fitted with an effective fabric filter or equivalent air pollution control system</li> <li>Exposed earth should be properly treated by compaction,</li> </ul>					

EIA Ref.	EM&A Log Ref.	Recommended Mitigation Measures	Objectives of the Recommended Measures & Main Concerns to address	Implementation Agent	Location / Timing	Implementation Stage	Requirements and/ or standards to be achieved
		turfing, hydroseeding, vegetation planting or sealing with latex, vinyl, bitumen, shotcrete or other suitable surface stabilizer within six months after the last construction activity on the construction site or part of the construction site where the exposed earth lies.					
\$4.3.10	D6	Implement regular dust monitoring under EM&A programme during the construction stage.	Monitoring of dust impact	Contractor	Selected rep. dust monitoring station	Construction stage	• TM-EIA
			Construction Noise (A	Airborne)			
S5.4.1	N1	<ul> <li>Implement the following good site practices:</li> <li>Only well-maintained plant should be operated on-site and plant should be serviced regularly during the construction programme;</li> <li>Machines and plant (such as trucks, cranes) that may be in</li> </ul>	Control construction airborne noise	Contractor	All construction sites	Construction stage	• Annex 5, TM-EIAO

EIA Ref.	EM&A Log Ref.	Recommended Mitigation Measures	Objectives of the Recommended Measures & Main Concerns to address	Implementation Agent	Location / Timing	Implementation Stage	Requirements and/ or standards to be achieved
		intermittent use should be shut down between work periods					
		or should be throttled down to a minimum;					
		Plant known to emit noise strongly in one direction, where					
		possible, be orientated so that the noise is directed away from					
		nearby NSRs;					
		• Silencers or mufflers on construction equipment should be					
		properly fitted and maintained during the construction works;					
		• Mobile plant should be sited as far away from NSRs as					
		possible and practicable;					
		• Material stockpiles, mobile container site office and other					
		structures should be effectively utilized, where practicable, to					
		screen noise from on-site construction activities.					
S5.4.1	N2	Install temporary hoarding located on the site boundaries	Reduce the	Contractor	All	Construction stage	• Annex 5,
		between noisy construction activities and NSRs. The conditions	construction noise		construction		TM-EIAO
		of hoardings shall be properly maintained throughout the	levels at low-level		sites		
		construction period.	zone of NSRs				
			through partial				

EIA Ref.	EM&A Log Ref.	Recommended Mitigation Measures	Objectives of the Recommended Measures & Main Concerns to address	Implementation Agent	Location / Timing	Implementation Stage	Requirements and/ or standards to be achieved
			screening				
\$5.4.1		Install movable noise barriers (typical design is wooden framed barrier with a small-cantilevered on a skid footing with 25mm thick internal sound absorptive lining), acoustic mat or full enclosure, screen the noisy plants including air compressors, generators and handheld breakers, etc.	Sreen the noisy plant items to be used at all construction sites	Contractor	All construction sites where practicable	Construction stage	• Annex 5, TM-EIAO
S5.4.1	N4	Use 'Quiet plant'	Reduce the noise levels of plant items	Contractor	All construction sites where practicable	Construction stage	• Annex 5, TM-EIAO
\$5.4.1		Loading/ unloading activities should be carried out inside the full enclosure of mucking out points.	Reduce the noise levels of loading/ unloading activities	Contractor	Mucking out locations	Construction stage	• Annex 5, TM-EIAO
\$5.4.1	N6	Sequencing operation of construction plants where practicable.	Operate sequentially within the same work site	Contractor	All construction sites where	Construction stage	• Annex 5, TM-EIAO

EIA Ref.	EM&A Log Ref.	Recommended Mitigation Measures	Objectives of the Recommended Measures & Main Concerns to address	Implementation Agent	Location / Timing	Implementation Stage	Requirements and/ or standards to be achieved
			to reduce the construction airborne noise		practicable		
\$5.4.1	N7	Implement a noise monitoring programme under EM&A programme.	Monitor the construction noise levels at the selected representative location	Contractor	Selected rep. noise monitoring station	Construction stage	• TM-EIAO
		Water	Quality (Construction	n Phase)			
\$6.9.1.1		In accordance with the Practice Note for Professional Persons on Construction Site Drainage, Environmental Protection Department, 1994 (ProPECC PN1/94), construction phase mitigation measures shall include the following:  Construction Runoff  At the start of site establishment, perimeter cut-off drains to	To minimize water quality impact from the construction site runoff and general construction activities	Contractor	All construction sites where practicable	Construction stage	Water Pollution     Control     Ordinance     ProPECC PN 1/94     TM-EIAO     TM-DSS

EIA Ref.	EM&A Log Ref.	Recommended Mitigation Measures	Objectives of the Recommended Measures & Main Concerns to address	Implementation Agent	Location / Timing	Implementation Stage	Requirements and/ or standards to be achieved
		direct off-site water around the site should be constructed					
		with internal drainage works and erosion and sedimentation					
		control facilities implemented. Channels (both temporary					
		and permanent drainage pipes and culverts), earth bunds or					
		sand bag barriers should be provided on site to direct					
		stormwater to silt removal facilities. The design of the					
		temporary on-site drainage system will be undertaken by the					
		contractor prior to the commencement of construction;					
		• The dikes or embankments for flood protection should be					
		implemented around the boundaries of earthwork areas.					
		Temporary ditches should be provided to facilitate the runoff					
		discharge into an appropriate watercourse, through a silt/					
		sediment trap. The sediment/ silt traps should be					
		incorporated in the permanent drainage channels to enhance					
		deposition rates;					
		The design of efficient silt removal facilities should be based					
		on the guidelines in Appendix A1 of ProPECC PN 1/94, which					

EIA Ref.	EM&A Log Ref.	Recommended Mitigation Measures	Objectives of the Recommended Measures & Main Concerns to address	Implementation Agent	Location / Timing	Implementation Stage	Requirements and/ or standards to be achieved
		states that the retention time for silt/ sand traps should be 5					
		minutes under maximum flow conditions. Sizes may vary					
		depending upon the flow rate, but for a flow rate of 0.1 m <sup>3</sup> /s a					
		sedimentation basin of 30 $\mathrm{m}^3$ would be required and for a					
		flow rate of 0.5 $$ m $^3/s$ the basin would be 150 $$ m $^3$ . The					
		detailed design of the sand/ silt traps shall be undertaken by					
		the contractor prior to the commencement of construction;					
		All exposed earth areas should be completed and vegetated as					
		soon as possible after earthworks have been completed, or					
		alternatively, within 14 days of the cessation of earthworks					
		where practicable. Exposed slope surfaces should be					
		covered by tarpaulin or other means;					
		• The overall slope of the site should be kept to a minimum to					
		reduce the erosive potential of surface water flows, and all					
		traffic areas and access roads protected by coarse stone					
		ballast. An additional advantage accruing from the use of					
		crushed stone is the positive traction gained during prolonged					

EIA Ref.	EM&A Log Ref.	Recommended Mitigation Measures	Objectives of the Recommended Measures & Main Concerns to address	Implementation Agent	Location / Timing	Implementation Stage	Requirements and/ or standards to be achieved
		periods of inclement weather and the reduction of surface					
		sheet flows;					
		• All drainage facilities and erosion and sediment control					
		structures should be regularly inspected and maintained to					
		ensure proper and efficient operation at all times and					
		particularly following rainstorms. Deposited silt and grit					
		should be removed regularly and disposed of by spreading					
		evenly over stable, vegetated areas;					
		Measures should be taken to minimize the ingress of site					
		drainage into excavations. If the excavation of trenches in					
		wet periods is necessary, they should be dug and backfilled in					
		short sections wherever practicable. Water pumped out					
		from trenches or foundation excavations should be discharged					
		into storm drains via silt removal facilities;					
		• Open stockpiles of construction materials (for example,					
		aggregates, sand and fill material) of more than 50m³ should					
		be covered with tarpaulin or similar fabric during rainstorms.					

EIA Ref.	EM&A Log Ref.	Recommended Mitigation Measures	Objectives of the Recommended Measures & Main Concerns to address	Implementation Agent	Location / Timing	Implementation Stage	Requirements and/ or standards to be achieved
		Measures should be taken to prevent the washing away of					
		construction materials, soil, silt or debris into any drainage					
		system;					
		• Manholes should always be adequately covered and					
		temporarily sealed so as to prevent silt, construction materials					
		or debris being washed into the drainage system and storm					
		runoff being directed into foul sewers;					
		Precautions be taken at any time of year when rainstorms are					
		likely, actions to be taken when a rainstorm is imminent or					
		forecasted, and actions to be taken during or after rainstorms					
		are summarized in Appendix A2 of ProPECC PN 1/94.					
		Particular attention should be paid to the control of silty					
		surface runoff during storm events, especially for areas					
		located near steep slopes;					
		• All vehicles and plant should be cleaned before leaving a					
		construction site to ensure no earth, mud, debris and the like					
		is deposited by them on roads. An adequately designed and					

EIA Ref.	EM&A Log Ref.	Recommended Mitigation Measures	Objectives of the Recommended Measures & Main Concerns to address	Implementation Agent	Location / Timing	Implementation Stage	Requirements and/ or standards to be achieved
		site wheel washing facilities should be provided at every					
		construction site exit where practicable. Wash-water should					
		have sand and silt settled out and removed at least on a					
		weekly basis to ensure the continued efficiency of the process.					
		The section of access road leading to, and exiting from, the					
		wheel wash bay to the public road should be paved with					
		sufficient backfall toward the wheel wash bay to prevent					
		vehicle tracking of soil and silty water to public roads and					
		drains;					
		Oil interceptors should be provided in the drainage system					
		downstream of any oil/ fuel pollution sources. The oil					
		interceptors should be emptied and cleaned regularly to					
		prevent the release of oil and grease into the storm water					
		drainage system after accidental spillage. A bypass should					
		be provided for the oil interceptors to prevent flushing during					
		heavy rain;					
		Construction solid waste, debris and rubbish on site should be					

EIA Ref.	EM&A Log Ref.	Recommended Mitigation Measures	Objectives of the Recommended Measures & Main Concerns to address	Implementation Agent	Location / Timing	Implementation Stage	Requirements and/ or standards to be achieved
		<ul> <li>collected, handled and disposed of properly to avoid water quality impacts;</li> <li>All fuel tanks and storage areas should be provided with locks and sited on sealed areas, within bunds of a capacity equal to 110% of the storage capacity of the largest tank to prevent spilled fuel oils from reaching water sensitive receivers nearby;</li> <li>Adopt best management practices;</li> <li>All earth works should be conducted sequentially to limit the amount of construction runoff generated from exposed areas during the wet season (April to September) as far as practicable.</li> </ul>					
S6.9.1.2	W2	Uncontaminated discharge should pass through sedimentation tanks prior to of-site discharge;     The wastewater with a high concentration of SS should be	To minimize construction water quality impact from the works	Contractor	All access shaft location	Construction stage	Water Pollution     Control     Ordinance     ProPECC PN 1/94     TM-DSS

EIA Ref.	EM&A Log Ref.	Recommended Mitigation Measures	Objectives of the Recommended Measures & Main Concerns to address	Implementation Agent	Location / Timing	Implementation Stage	Requirements and/ or standards to be achieved
		treated (e.g. by sedimentation tanks with sufficient retention					• TM-EIAO
		time) before discharge. Oil interceptors would also be					
		required to remove the oil, lubricants and grease from the					
		wastewater;					
		Direct discharge of the bentonite slurry (as a result of D-wall)					
		is not allowed. It should be reconditioned and reused					
		wherever practicable. Temporary storage locations (typically					
		a properly closed warehouse) should be provided on site for					
		any unused bentonite that needs to be transported away after					
		all the related construction activities area completed. The					
		requirements in ProPECC PN 1/94 should be adhered to in the					
		handling and disposal of bentonite slurries.					
\$6.9.1.3	W3	Sewage Effluent	To minimize water	Contractor	All	Construction stage	Water Pollution
			quality from sewage		construction		Control
		Portable chemical toilets and sewage holding tanks are	effluent		sites where		Ordinance
		recommended for handling the construction sewage			practicable		• TM-DSS
		generated by the workforce. A licensed contractor should be					

EIA Ref.	EM&A Log Ref.	Recommended Mitigation Measures	Objectives of the Recommended Measures & Main Concerns to address	Implementation Agent	Location / Timing	Implementation Stage	Requirements and/ or standards to be achieved
		employed to provide appropriate and adequate portable					
		toilets and be responsible for appropriate disposal and					
		maintenance.					
\$6.9.1.6	W6	<u>Accidental Spillage</u>	To minimize water	Contractor	All	Construction stage	Water Pollution
			quality impact from		construction		Control
		In order to prevent accidental spillage of chemicals, the following	accidental spillage		site where		Ordinance
		is recommended:			practicable		ProPECC PN 1/94
		All the tanks, containers, storage area should be					• TM-EIAO
		bunded and the locations should be locked as far as					• TM-DSS
		possible from the sensitive watercourse and					
		stormwater drains;					
		The Contractor should register as a chemical waste					
		producer if chemical wastes would be generated.					
		Storage of chemical waste arising from the					
		construction activities should be stored with suitable					
		labels and warnings.					
		Disposal of chemical wastes should be conducted in compliance					

EIA Ref.	EM&A Log Ref.	Recommended Mitigation Measures	Objectives of the Recommended Measures & Main Concerns to address	Implementation Agent	Location / Timing	Implementation Stage	Requirements and/ or standards to be achieved
		with the requirements as stated in the Waste Disposal (Chemical					
		Waste) (General) Regulation.					
		Waste Ma	anagement (Construc	tion Waste)			l
S7.4.1	WM1	On-site sorting of C&D material	Separation of unsuitable rock	Contractor	All construction	Construction stage	• DEVB (W) No. 6/2010
		Geological assessment should be carried out by competent persons on site during excavation to identify materials which are not suitable to use as aggregate in structural concrete (e.g. volcanic rock, Aplite dyke rock, etc.). Volcanic rock and Aplite dyke rock should be separated at the source sites as far as practicable and stored at designated stockpile area preventing them from delivering to crushing facilities. The crushing plant operator should also be reminded to set up measures to prevent unsuitable rock from ending up at concrete batching plants and be turned into concrete for structural use. Details regarding control measures at source	from ending up at concrete batching plants and be turned into concrete for structural use		sites		

EIA Ref.	EM&A Log Ref.	Recommended Mitigation Measures	Objectives of the Recommended Measures & Main Concerns to address	Implementation Agent	Location / Timing	Implementation Stage	Requirements and/ or standards to be achieved
		site and crushing facilities should be submitted by the Contractor for the Engineer to review and agree. In addition, site records should also be kept for the types of rock materials excavated and the traceability of delivery will be ensured with the implementation of Trip Ticket System and enforced by site supervisory staff as stipulated under DEVB TC(W) No. 6/2010 for tracking of the correct delivery to the rock crushing facilities for processing into aggregates. Alternative disposal option for the reuse of volcanic rock and Aplite Dyke rock, etc. should be explored.					
\$7.5.1	WM2	<ul> <li>Construction and Demolition Material</li> <li>Maintain temporary stockpiles and reuse excavated fill material for backfilling and reinstatement;</li> <li>Carry out on-site sorting;</li> <li>Make provisions in the Contract documents to allow and promote the use of recycled aggregates where appropriate;</li> <li>Adopt 'selective demolition' technique to demolish the</li> </ul>	Good site practice to minimize the waste generation and recycle the C&D materials as far as practicable so as to reduce the amount	Contractor	All construction sites	Construction stage	Land     (Miscellaneous     Provisions)     Ordinance     Waste Disposal     Ordinance     ETWB TCW No.

EIA Ref.	EM&A Log Ref.	Recommended Mitigation Measures	Objectives of the Recommended Measures & Main Concerns to address	Implementation Agent	Location / Timing	Implementation Stage	Requirements and/ or standards to be achieved
		existing structures and facilities with a view to recovering	for final disposal				19/2005
		broken concrete effectively for recycling purpose, where					
		possible;					
		Implement a trip-ticket system for each works contract to					
		ensure that the disposal of C&D materials are properly					
		documented and verified; and					
		Implement an enhanced Waste Management Plan similar to					
		ETWBTC (Works) No. 19/2005 – "Environmental Management					
		on Construction Sites" to encourage on-site sorting of C&D					
		materials and to minimize their generation during the course					
		of construction.					
S7.5.1	WM3	C&D Waste	Good site practice	Contractor	All	Construction stage	• Land
		Standard formwork or pre-fabrication should be used as far as	to minimize the		construction		(Miscellaneous
		practicable in order to minimize the arising of C&D materials.	waste generation		sites		Provisions)
		The use of more durable formwork or plastic facing for the	and recycle the C&D				Ordinance
		construction works should be considered. Use of wooden	materials as far as				• Waste Disposal
		hoardings should not be used, as in other projects. Metal	practicable so as to				Ordinance

EIA Ref.	EM&A Log Ref.	Recommended Mitigation Measures	Objectives of the Recommended Measures & Main Concerns to address	Implementation Agent	Location / Timing	Implementation Stage	Requirements and/ or standards to be achieved
		hoarding should be used to enhance the possibility of	reduce the amount				• ETWB TCW No.
		recycling. The purchasing of construction materials will be	for final disposal				19/2005
		carefully planned in order to avoid over ordering and wastage;					
		The Contractor should recycle as much of the C&D materials					
		as possible on-site. Public fill and C&D waste should be					
		segregated and stored in different containers or skips to					
		enhance reuse or recycling of materials and their proper					
		disposal. Where practicable, concrete and masonry can be					
		crushed and used as fill. Steel reinforcement bar can be					
		used by scrap steel mills. Different areas of the sites should					
		be considered for such segregation and storage.					
S7.5.1	WM6	Chemical Waste	Control the	Contractor	All	Construction stage	• Waste Disposal
		Chemical waste that is produced, as defined by Schedule 1 of	chemical waste and		construction		(Chemical Waste)
		the Waste Disposal (Chemical Waste) (General) Regulation,	ensure proper		sites		(General)
		should be handled in accordance with the Code of Practice on	storage, handling				Regulation
		the Packaging, Labelling and Storage of Chemical Wastes;	and disposal				Code of Practice
		Containers used for the storage of chemical wastes should be					on the Packaging,

EIA Ref.	EM&A Log Ref.	Recommended Mitigation Measures	Objectives of the Recommended Measures & Main Concerns to address	Implementation Agent	Location / Timing	Implementation Stage	Requirements and/ or standards to be achieved
		suitable for the substance they are holding, resistant to					Labelling and
		corrosion, maintained in a good condition, and securely					Storage of
		closed, have a capacity of less than 450 L unless the					Chemical Waste
		specification has been approved by EPD, and display a label in					
		English and Chinese in accordance with instructions					
		prescribed in Schedule 2 of the regulation;					
		• The storage area for chemical wastes should be clearly					
		labelled and used solely for the storage of chemical waste,					
		enclosed on at least 3 sides, have an impermeable floor and					
		bunding of sufficient capacity to accommodate 110% of the					
		volume of the largest container or 20% of the total volume of					
		waste stored in that area, whichever is the greatest, have					
		adequate ventilation, covered to prevent rainfall entering, and					
		arranged so that incompatible materials are adequately					
		separated;					
		Disposal of chemical waste should be via a licensed waste					
		collector, be to a facility licensed to receive chemical waste,					

EIA Ref.	EM&A Log Ref.	Recommended Mitigation Measures	Objectives of the Recommended Measures & Main Concerns to address	Implementation Agent	Location / Timing	Implementation Stage	Requirements and/ or standards to be achieved
		such as the Chemical Waste Treatment Centre which also					
		offers a chemical waste collection service and can supply the					
		necessary storage containers, or be to a reuser of the waste,					
		under approval from EPD.					
\$7.5.1	WM7	General Refuse	Minimize	Contractor	All	Construction stage	• Waste Disposal
		General refuse generated on-site should be stored in enclosed	production of the		construction		Ordinance
		bins or compaction units separately from construction and	general refuse and		sites		
		chemical wastes;	avoid odour, pest				
		• A reputable waste collector should be employed by the	and litter impacts				
		Contractor to remove general refuse from the site, separately					
		from construction and chemical wastes, on a daily basis to					
		minimize odour, pest and litter impacts. Burning of refuse					
		on construction sites is prohibited by law.					
		Aluminum cans are often recovered from the waste stream by					
		individual collectors if they are segregated and made easily					
		accessible. Separate labelled bins for their deposit should be					
		provided if feasible;					

EIA Ref.	EM&A Log Ref.	Recommended Mitigation Measures	Objectives of the Recommended Measures & Main Concerns to address	Implementation Agent	Location / Timing	Implementation Stage	Requirements and/ or standards to be achieved
		Office wastes can be reduced through the recycling of paper if					
		volumes are large enough to warrant collection.					
		Participation in a local collection scheme should be considered					
		by the Contractor.					
	T		Hazard to Life	2			
S9.18	H1	Blasting activities regarding transport and use of explosives should	To ensure that the	Contractor	Works areas	Construction stage	Dangerous Goods
		be supervised and audited by competent site staff to ensure full	risks from the		at which		Ordinance
		compliance with the blasting permit conditions.	proposed explosives		explosives		
			handling and		would be		
			transport would be		used		
			acceptable				
S9.6,	H2	Detonators shall not be transported in the same vehicle with	To reduce the risk of	Contractor	-	Construction stage	Dangerous Goods
para.4		other Category 1 Dangerous Goods.	explosion during				Ordinance
			the transport of				
			cartridged emulsion				
S9.6,	Н3	The explosives delivery trucks should be approved by Mines	To comply with the	Contractor	-	Construction stage	Dangerous Goods
para.8		Division and should meet the regulatory requirements for	requirements for				Ordinance

Acuity Sustainability Consulting Ltd.

EIA Ref.	EM&A Log Ref.	Recommended Mitigation Measures	Objectives of the Recommended Measures & Main Concerns to address	Implementation Agent	Location / Timing	Implementation Stage	Requirements and/ or standards to be achieved
		transport of explosives.	approval of an explosives delivery vehicle				
S9.10, para.7 and S9.18	Н4	Blast cover should be provided for shaft at HMT, and kept closed during blasting.  Provision of blast doors or heavy duty blast curtains should be implemented at the shaft to prevent flyrock and control the air overpressure.	To ensure safe use of explosives	Contractor	Shaft	Construction stage	-
\$9.16	H5	Only the required quantity of explosives for a particular blast should be transported to avoid the return.	To reduce risks during explosives transport	Contractor	Works areas at which explosives would be used	Construction stage	-
S9.18	Н7	The approved truck dedicated for transport of explosives should comply with the "Guidance Note on Requirements for Approval of an Explosives Delivery Vehicle" issued by CEDD Mines Division.	To reduce the risk during explosives transport	Contractor	Works areas of which explosives	Construction stage	Dangerous Goods     Ordinance

EIA Ref.	EM&A Log Ref.	Recommended Mitigation Measures	Objectives of the Recommended Measures & Main Concerns to address	Implementation Agent	Location / Timing	Implementation Stage	Requirements and/ or standards to be achieved
		The truck should be periodically inspected and properly			would be		
		maintained in good operation conditions. The fuel carried in the			used		
		fuel tank should be minimized to reduce the duration of fire.					
		Adequate fire fighting equipment shall be provided, inspected and					
		replaced periodically (e.g. fire extinguishers).					
S9.18	Н8	The driver and his assistant should be physically healthy,	To reduce the risk	Contractor	Works areas	Construction stage	-
		experienced and have good safe driving records. The driver	during explosives		at which		
		should hold a proper driving licence for the approved transport	transport		explosives		
		truck. Dedicated training programme and regular road safety			would be		
		briefing sessions/ workshops should be provided to enhance their			used		
		safe driving attitude and practice. Smoking should be strictly					
		prohibited.					
S9.18	Н9	Emergency response plans in case of road accident should be	To reduce the risk	Contractor	Works areas	Construction stage	-
		prepared and implemented. The driver and his assistant should	during explosives		at which		
		be familiar with the emergency procedures including evacuation,	transport		explosives		
		and proper communication/ fire-fighting equipment should be			would be		
		provided to the driver and his assistant.			used		

EIA Ref.	EM&A Log Ref.	Recommended Mitigation Measures	Objectives of the Recommended Measures & Main Concerns to address	Implementation Agent	Location / Timing	Implementation Stage	Requirements and/ or standards to be achieved
S9.18		Close liaison and communication among Mines Division,	To reduce the risk	Contractor	Works areas	Construction stage	-
		Contractors for transport of explosives, and working staff of the	during explosives		at which		
		blasting should be established. In case of any change of work	transport		explosives		
		schedule leading to cancellation or variation of explosives			would be		
		required, relevant parties should be informed in time to avoid			used		
		unused explosives at the work sites.					
S9.18	H11	Close liaison and communication with Fire Services Department	To reduce the risk	Contractor	Works areas	Construction stage	-
		should be established to reduce the accidental detonation	during explosives		at which		
		escalated from a fire. The contractors for transport of explosives	transport		explosives		
		should use the preferred transport routes as far as practicable.			would be		
					used		
S9.18	H12	Contingency plan should be prepared for transport of explosives	To reduce the risk	Contractor	Works areas	Construction stage	-
		under severe weather conditions such as rainstorms and	during explosives		at which		
		thunderstorms.	transport		explosives		
					would be		
					used		

EIA Ref.	EM&A Log Ref.	Recommended Mitigation Measures	Objectives of the Recommended Measures & Main Concerns to address	Implementation Agent	Location / Timing	Implementation Stage	Requirements and/ or standards to be achieved
\$9.18	H13	For explosive transport, all packages of explosives on the truck should be properly stored in the truck compartment as required.  Packaging of the explosives should remain intact (i.e. damage free) until they are transferred to the blasting site.	To reduce the risk during explosives transport	Contractor	Works areas at which explosives would be used	Construction stage	-
\$9.18		Availability of a parking space should be ensured before commencement of transport of explosives. Location for loading and unloading of explosives should be as close as possible to the shaft. No hot work should be performed in the vicinity during the time of loading and unloading.	To reduce the risk during explosives transport	Contractor	Works areas at which explosives would be used	Construction stage	-
\$9.18		It is recommended to explore to minimize the use of the cartridged emulsion explosives and maximize the use of bulk emulsion explosive as far as practicable.	To reduce the risk during explosives transport	Contractor	Works areas at which explosives would be used	Construction stage	-
S9.18	H24	It is recommended to explore to use smaller explosive charges such as 'cast boosters' or 'mini-cast booster' instead of cartridged	To reduce the risk during explosives	Contractor	Works areas at which	Construction stage	-

EIA Ref.	EM&A Log Ref.	Recommended Mitigation Measures	Objectives of the Recommended Measures & Mai Concerns to address	Implementation	Location / Timing	Implementation Stage	Requirements and/ or standards to be achieved
		emulsion as primers for bulk emulsion. This option reduces the	transport		explosives		
		quantity of explosives required for transportation for the sections			would be		
		where bulk emulsion will be used.			used		
			Landscape &	Visual			
S10.10.1	LV1	Good Site Management	Minimize visu	Contractor	Within	Construction stage	-
Table			impact		Project site		
10.11		• Large temporary stockpiles of excavated material shall be					
		covered with unobtrusive sheeting to prevent dust and dirt					
		spreading to adjacent landscape areas and vegetation, and to					
		create a neat and tidy visual appearance.					
		Construction plant and building material shall be orderly and					
		carefully stored in order to create a neat and tidy visual					
		appearance.					
S10.10.1	LV4	Screen Hoarding	Minimize visu	al Contractor	Within	Construction stage	-
Table		Decorative screen hoarding should be erected to screen the	impact		Project site		
10.11		public from the construction area. It should be designed to					
		be compatible with the existing urban context.					

EIA Ref.	EM&A Log Ref.	Recommended Mitigation Measures	Objectives of the Recommended Measures & Main Concerns to address	Implementation Agent	Location / Timing	Implementation Stage	Requirements and/ or standards to be achieved
S10.10.1	LV5	Lighting Control during Construction	Minimize visual	Contractor	Within	Construction stage	-
Table		All lighting in the construction site shall be carefully controlled	impact		Project site		
10.11		to minimize light pollution and night-time glare to nearby					
		residencies and GIC. The Contractor shall consider other					
		security measures, which shall minimize the visual impacts.					
S10.10.1	LV6	Erosion Control	Minimize landscape	Contractor	Within	Construction stage	-
Table		The potential for soil erosion shall be reduced by minimizing	impact		Project site		
10.11		the extent of vegetation disturbance on site and by providing					
		a protective cover over newly exposed soil.					
S10.10.1	LV7	Tree Protection & Preservation	Minimize landscape	Contractor	Within	Construction stage	• 'Guidelines for
Table		Carefully protected during construction. Tree protection	and visual impact		Project site		Tree Risk
10.11		measures will be detailed at the Tree Removal Application					Management and
		stage and plans submitted to the relevant Government					Assessment
		Department for approval in due course in accordance with					Arrangement on
		ETWB TC no. 3/2006.					an Area Basis and
							on a Tree Basis',
							Greening,

EIA Ref.	EM&A Log Ref.	Recommended Mitigation Measures	Objectives of the Recommended Measures & Main Concerns to address	Implementation Agent	Location / Timing	Implementation Stage	Requirements and/ or standards to be achieved
							Landscape and Tree Management (GLTM) Section, DEVB • Latest recommended horticultural practices from GLTM Section, DEVB
S10.10.1 Table	LV8	Tree Transplantation  • For trees unavoidably affected by the Project that have to be	Minimize landscape and visual impact	Contractor	Within Project site	Prior to Construction stage	• ETWB TCW 3/2006
10.11		removed, where practical transplantation will be chosen as			and		• Latest
		the top priority method of removal. If this is not possible or			designated		recommended
		practical compensatory planting will be provided for trees			off-site		horticultural
		unavoidably felled (See LV10). For trees unavoidably			locations		practices from

EIA Ref.	EM&A Log Ref.	Recommended Mitigation Measures	Objectives of the Recommended Measures & Main Concerns to address	Implementation Agent	Location / Timing	Implementation Stage	Requirements and/ or standards to be achieved
		affected by the Project works that are transplanted,					Greening,
		transplantation must be carried out in accordance with ETWB					Landscape and
		TCW 2/2004 and 3/2006.					Tree
							Management
							(GLTM) Section,
							DEVB
							• ETWB TCW
							2/2004
S10.10.1	LV9	Compensatory Planting	Minimize visual	Contractor	Within	Construction stage	• ETWB TCW
Table		• For trees unavoidably affected by the Project that have to be	impact and also		Project site		3/2006
10.11		removed, where practical transportation will be chosen as the	enhance landscape				• Latest
		top priority method of removal but if this is not possible or					recommended
		practical compensatory planting will be provided for trees					horticultural
		unavoidably felled. All felled trees shall be compensated for					practices from
		by planting trees to the satisfaction of relevant Government					Greening,
		projects. Required numbers and locations of compensatory					Landscape and
		trees shall be determined and agreed separately with					Tree


EIA Ref.	EM&A Log Ref.	Recommended Mitigation Measures	Objectives of the Recommended Measures & Main Concerns to address	Implementation Agent	Location / Timing	Implementation Stage	Requirements and/ or standards to be achieved
		Government during the Tree Felling Application process under					Management
		ETWBTC 3/2006.					(GLTM) Section,
		Compensatory tree planting may be incorporated into public					DEVB
		open spaces and along roadside amenity areas affected by					• ETWB TCW
		the construction works and therefore be part of the bigger					2/2004
		wider planting plans. Onsite compensation planting is					
		preferred but if necessary, additional receptor sites outside					
		the Works Area shall be agreed separately with Government					
		during the Tree Felling Application process.					
		Cultural	Heritage Impact (Con	struction Phase)			
S11.4.4	CH1	The contractor should be alerted during the construction on the	To preserve any	Contractor	During	Construction stage	• AMOs
		possibility of locating archaeological remains and as a	cultural heritage		construction		requirements
		precautionary measure, AMO shall be informed immediately in	items which may be		works		
		case of discovery of antiquities or supposed antiquities in the	removed and				
		subject sites.	damaged by the				
			excavation				
			EM&A Project				

EIA Ref.	EM&A Log Ref.	Recommended Mitigation Measures	Objectives of the Recommended Measures & Main Concerns to address	Implementation Agent	Location / Timing	Implementation Stage	Requirements and/ or standards to be achieved
S13.2	EM1	An Independent Environmental Checker needs to be employed	Control EM&A	Highways	All	Construction stage	• EIAO Guidance
		as per the EM&A Manual	Performance	Department	construction		Note No. 4/2010
					sites		• TM-EIAO
S13.2-1	EM2	• An Environmental Team needs to be employed as per the	Perform	Highways	All	Construction stage	• EIAO Guidance
3.4		EM&A Manual;	environmental	Department/	construction		Note No. 4/2010
		• Prepare a systematic Environmental Management Plan to	monitoring &	Contractor	sites		• TM-EIAO
		ensure effective implementation of the mitigation measures;	auditing				
		• An environmental impact monitoring needs to be					
		implemented by the Environmental Team to ensure all the					
		requirements given in the EM&A Manual are fully complied					
		with.					

Monthly Environmental Monitoring & Auditing Report Contract No. HY/2014/09 Central Kowloon Route – Ho Man Tin Access Shaft
Appendix G
Monitoring Schedule of the Reporting Month
Withing Benedule of the Reporting Within

	M-A3	4 Impact TSP-1hr & TSP-24hr monitoring M-A3 Noise monitoring for	Impact Monitoring Schedule for HMTS  Jun-18  Wed  6		1	Sat 2  9  Impact TSP-1hr & TSP-24hr monitoring for
3 4 TSP-1hr & T Noise	S Impact TSP-24hr monitoring for M-A3 ise monitoring for	4 Impact TSP-1hr & TSP-24hr monitoring M-A3 Noise monitoring for			1	9 Impact TSP-1hr & TSP-24hr monitoring for
TSP-1hr & T Noise	Impact TSP-24hr monitoring for M-A3 ise monitoring for	Impact TSP-1hr & TSP-24hr monitoring M-A3 Noise monitoring for	6	7		9 Impact TSP-1hr & TSP-24hr monitoring for
TSP-1hr & T Noise	Impact TSP-24hr monitoring for M-A3 ise monitoring for	Impact TSP-1hr & TSP-24hr monitoring M-A3 Noise monitoring for	6	7	8	Impact TSP-1hr & TSP-24hr monitoring for
10 11	Impact TSP-24hr monitoring for M-A3 ise monitoring for	TSP-1hr & TSP-24hr monitoring M-A3  Noise monitoring for				Impact TSP-1hr & TSP-24hr monitoring for
		IVI-N3				M-A3 Noise monitoring for M-N3
	12	11	13	14	15	16
17 18					Impact TSP-1hr & TSP-24hr monitoring for M-A3 Noise monitoring for M-N3	
	19	18	20		22	23
				Impact TSP-1hr & TSP-24hr monitoring for M-A3 Noise monitoring for M-N3		
24 25			27	28	29	30
*Remark: No construction works will be performed on publi	26	25	Impact			

Appendix H
Calibration Certificates
(Air Monitoring)

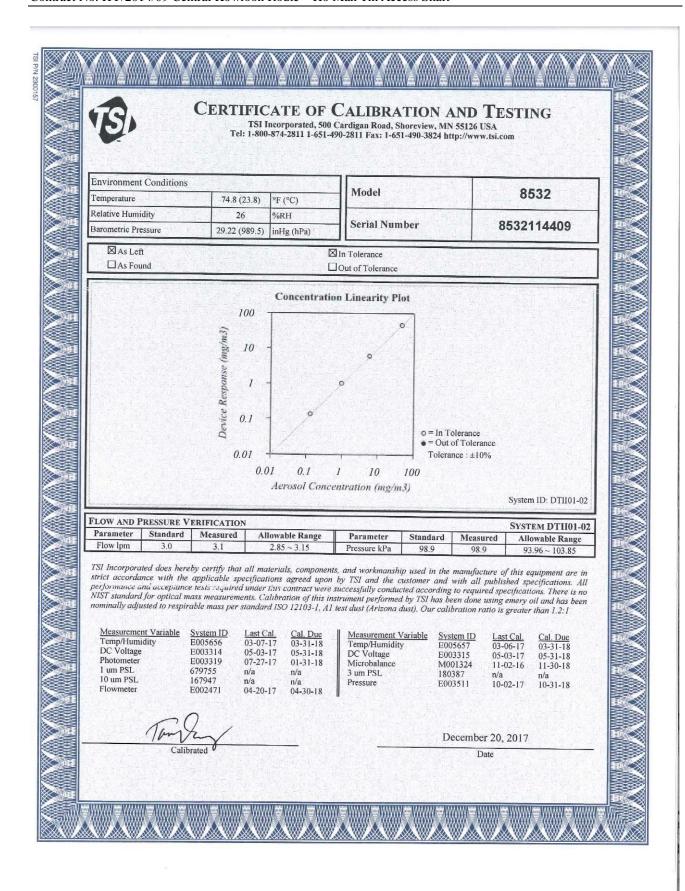



RECALIBRATION
DUE DATE:

February 2, 2019

# Certificate of Calibration

**Calibration Certification Information** 

Cal. Date: February 2, 2018

Rootsmeter S/N: 438320

Ta: 294
Pa: 754.4

°K

Operator: Jim Tisch
Calibration Model #:

TE-5025A

Calibrator S/N: 3465

mm Hg

Run	Vol. Init (m3)	Vol. Final (m3)	ΔVol. (m3)	ΔTime (min)	ΔP (mm Hg)	ΔH (in H2O)
1	1	2	1	1.4360	3.2	2.00
2	3	4	1	1.0140	6.4	4.00
3	5	6	1	0.9070	7.9	5.00
4	7	8	1	0.8680	8.8	5.50
5	9	10	1	0.7180	12.7	8.00

	Data Tabulation						
Vstd	Qstd	$\sqrt{\Delta H \left(\frac{Pa}{Pstd}\right) \left(\frac{Tstd}{Ta}\right)}$		Qa	$\sqrt{\Delta H (Ta/Pa)}$		
(m3)	(x-axis)	(y-axis)	Va	(x-axis)	(y-axis)		
1.0018	0.6977	1.4185	0.9958	0.6934	0.8829		
0.9976	0.9838	2.0061	0.9915	0.9778	1.2486		
0.9956	1.0977	2.2429	0.9895	1.0910	1.3959		
0.9944	1.1456	2.3524	0.9883	1.1386	1.4641		
0.9892	1.3777	2.8371	0.9832	1.3693	1.7657		
	m=	2.08721		m=	1.30698		
QSTD[	b=	-0.04206	QA	b=	-0.02618		
	r=	0.99995	,	r=	0.99995		

Calculations					
Vstd=	ΔVol((Pa-ΔP)/Pstd)(Tstd/Ta)	Va=	ΔVol((Pa-ΔP)/Pa)		
Qstd=	Vstd/ΔTime	Qa=	Va/∆Time		
For subsequent flow rate calculations:					
Qstd=	$1/m\left(\left(\sqrt{\Delta H\left(\frac{Pa}{Pstd}\right)\left(\frac{Tstd}{Ta}\right)}\right)-b\right)$	Qa=	$1/m\left(\left(\sqrt{\Delta H\left(Ta/Pa\right)}\right)-b\right)$		

	Standard Conditions
Tstd:	298.15 ° <sub>K</sub>
Pstd:	760 mm Hg
,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	Key
ΔH: calibrate	or manometer reading (in H2O)
ΔP: rootsmet	ter manometer reading (mm Hg)
Ta: actual ab	solute temperature (°K)
Pa: actual ba	rometric pressure (mm Hg)
b: intercept	
m· clone	

### RECALIBRATION

US EPA recommends annual recalibration per 1998 40 Code of Federal Regulations Part 50 to 51, Appendix B to Part 50, Reference Method for the Determination of Suspended Particulate Matter in the Atmosphere, 9.2.17, page 30

isch Environmental, Inc. .45 South Miami Avenue /illage of Cleves, OH 45002

 $\underline{www.tisch-env.com}$ 

TOLL FREE: (877)263-7610 FAX: (513)467-9009

# InnoTech Instrumentation Co. Ltd.

創新科儀有限公司

# HIVOL SAMPLER CALIBRATION DATA SHEET (TSP)

#### Site Information

	Tsol Kung Po Secondary			T	***************************************
Location:	School	Site ID:	M-A3	Date:	29-May-2018
Serial No:	1048	Model:	TE-5170X	Operator:	Chris

#### **Ambient Condition**

Corrected Pressure (mm Hg):	764.3	Temperature (deg K):	293.2

#### **Calibration Orifice**

Model:	TE-5025	Slope:	2.08721
Serial No.:	3465	Intercept:	-0.04206
Calibration Due Date:	2-Feb-19	Corr. Coeff:	0.99995

#### **Calibration Data**

Plate or	In,H2O	Qa, X-Axis	I, CFM	IC, Y-Axia
Test #	(in)	(m3/min)	(chart)	(corrected)
1	2.40	0.771	35.0	35.39
2	3.41	0.915	39.0	39.43
3	4.38	1.034	42.0	42.47
4	4.99	1.102	44.0	44.49
5	6.92	1.294	49.0	49.54

Sampler Calibtation Relationship (Qa on x-axis, IC on y-axis)

n= 26.9836	=	j .	b=	14.6539	Corr. Coeff=	0.9999
			•		-	

Sampler set point(SSP) 47 CFM

# Calculations

m = sampler slope

Qstd = 1/m[Sqrt(H2O(Pa/Pstd)(Tstd/Ta))-b]

IC = I[Sqrt(Pa/Pstd)(Tstd/Ta)]

 $\begin{aligned} & \text{Qstd} = \text{standard flow rate} \\ & \text{IC} = \text{corrected chart response} \\ & \text{I} = \text{actual chart response} \end{aligned}$ 

m = calibrator Qstd slope b = calibrator Qstd intercept

Ta = actual temperature during calibration (deg K)
Pa = actual pressure during calibration (mm Hg)

Tstd = 298 deg K Pstd = 760 mm Hg

For subsequent calculation of sampler flow: (1.21\*m+b)/[Sqrt(298/Tav)(Pav/760)]

b = sampler intercept
I = chart response
Tav = average temperature
Pav = average pressure

Checked by: Date: 29-May-18

# InnoTech Instrumentation Co. Ltd.

創新科儀有限公司

# **HIVOL SAMPLER CALIBRATION DATA SHEET (TSP)**

# **Site Information**

	Isol Kung Po Secondary				
Location:	School	Site ID:	M-A3	Date:	15-Jun-2018
Serial No:	1048	Model:	TE-5170X	Operator:	Chris

### **Ambient Condition**

Corrected Pressure (mm Hg):	764.3	Temperature (deg K):	293.2

# **Calibration Orifice**

Model:	TE-5025	Slope:	2.08721
Serial No.:	3465	Intercept:	-0.04206
Calibration Due Date:	2-Feb-19	Corr. Coeff:	0.99995

#### **Calibration Data**

Plate or	In,H2O	Qa, X-Axis	I, CFM	IC, Y-Axia
Test #	(in)	(m3/min)	(chart)	(corrected)
1	1.71	0.654	32.0	32.35
2	2.84	0.837	37.0	37.41
3	3.36	0.908	39.0	39.43
4	4.01	0.990	41.0	41.45
5	5.64	1.171	46.0	46.51

Sampler Calibtation	on Relationship (Qa on x-a	xis, IC on y	-axis)		
m=	27.2909	b=	14.5484	Corr. Coeff=	0.9999
Sample	er set point(SSP)	47	CFM		
IC = I[Sqrt(Pa/Psto Qstd = standard fl IC = corrected cha I = actual chart res m = calibrator Qst Ta = actual tempe Pa = actual pressu Tstd = 298 deg K Pstd = 760 mm Hg For subsequent ca	ow rate irt response sponse td slope d intercept irature during calibration (o	leg K)	Calculations  m = sampler slope b = sampler intercept l = chart response  Tav = average temperature Pav = average pressure		
Checked by: _	Chris		Date:	15-Ји	ın-18

Monthly Environmental Contract No. HY/2014/09	9 Central Kowloon Rout	e – Ho Maii Tili Access Silait	
A 4.	<b>~</b>		
Appendix	I		
		tes (Noise)	



# Sun Creation Engineering Limited

Calibration and Testing Laboratory

# Certificate of Calibration

校正證書

Certificate No.: C176148

證書編號

ITEM TESTED / 送檢項目 (Job No. / 序引編號: IC17-1542)

Audio Analyzer

Date of Receipt / 收件日期: 26 October 2017

Description / 儀器名稱 : Manufacturer / 製造商

Model No./型號

NTi XL2

Serial No./編號

A2A-09696-E0

Supplied By / 委託者

Acumen Environmental Engineering and Technologies Co., Ltd.

Lot 11, Tam Kon Shan Road, North Tsing Yi, N.T.

### TEST CONDITIONS / 測試條件

Temperature / 溫度 :

Relative Humidity / 相對濕度 :

 $(55 \pm 20)\%$ 

Line Voltage / 電壓 :

#### TEST SPECIFICATIONS / 測試規範

Calibration check

DATE OF TEST / 測試日期

3 November 2017

#### TEST RESULTS / 測試結果

The results apply to the particular unit-under-test only.

The results do not exceed manufacturer's specification.

The results are detailed in the subsequent page(s).

The test equipment used for calibration are traceable to National Standards via:

- The Government of The Hong Kong Special Administrative Region Standard & Calibration Laboratory
- Agilent Technologies / Keysight Technologies
- Rohde & Schwarz Laboratory, Germany
- Fluke Everett Service Center, USA

Tested By

測試

K C Lee

Certified By

核證

Engineer

H C Chan Engineer

Date of Issue 簽發日期

7 November 2017

The test equipment used for calibration are traceable to the Nation Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior

本設書所載校正用之測試器材均可測源至國際標準。局部後印本設書需先獲本實驗所書面批准。

Sun Creation Engineering Limited - Calibration & Testing Laboratory
c/o 4/f, Tsing Shan Wan Exchange Building, 1 Hing On Lane, Tuen Mun, New Territories, Hong Kong
師創工保有限公司 - 校正及檢測實驗所
c/o 香港新學中門要安里。樂育山海儀樓四樓

Fax/傳真: 2744 8986 Tel/電話: 2927 2606

E-mail/電郵: callab@suncreation.com | Website信用: www.suncreation.com Page 1 of 4



Sun Creation Engineering Limited

Calibration and Testing Laboratory

# Certificate of Calibration

校正證書

Certificate No.: C176148

證書編號

- 1. The unit-under-test (UUT) was allowed to stabilize in the laboratory for over 12 hours, and switched on to warm up for over 10 minutes before the commencement of the test.
- Self-calibration using the laboratory acoustic calibrator was performed before the test from 6.1.1.2 to 6.3.2. 2.
- The results presented are the mean of 3 measurements at each calibration point. 3.
- 4 Test equipment:

Equipment ID

**Description** 

Certificate No.

CL280 CL281

40 MHz Arbitrary Waveform Generator

C170048

Multifunction Acoustic Calibrator

PA160023

- 5. Test procedure: MA101N.
- Results: 6
- 6.1 Sound Pressure Level
- 6.1.1 Reference Sound Pressure Level

6.1.1.1 Before Self-calibration

UUT Setting			Applie	UUT	
Range	Frequency	Time	Level	Freq.	Reading
(dB)	Weighting	Weighting	(dB)	(kHz)	(dB)
30 - 130	A	FAST	94.00	1	93.9

6.1.1.2 After Self-calibration

UUT Setting			Applied Value		UUT	IEC 61672
Range	Frequency	Time	Level	Freq.	Reading	Class 1
(dB)	Weighting	Weighting	(dB)	(kHz)	(dB)	(dB)
30 - 130	A	FAST	94.00	1	94.0	± 1,1

6.1.2 Linearity

Imounty	UUT Setting		Applie	d Value	UUT
Range (dB)	Frequency Weighting	Time Weighting	Level (dB)	Freq. (kHz)	Reading (dB)
30 - 130	A	FAST	94.00	1	94.0 (Ref.)
			104.00		104.0
			114.00		114.0

IEC 61672 Class 1 Spec. :  $\pm$  0.6 dB per 10 dB step and  $\pm$  1.1 dB for overall different.

The test equipment used for calibration are naceable to the Nation Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗所書面批准。

Sun Creation Engineering Limited - Calibration & Testing Laboratory Sun County Engineering Counter County (County) (co. 4年, Fsing Shan Wan Exchange Building, I Hing On Lanc. Tuen Mun, New Territories, Hong Kong 練創工程有限公司 — 校正及檢測實驗所

e/o 香港新界屯門與安里一號背山灣機樓四樓 Tel/電話: 2927 2606 Fax/傳真: 2744 8986

E-mail/電腦: callab@suncreation.com Website/網址: www.suncreation.com

Page 2 of 4



Sun Creation Engineering Limited

Calibration and Testing Laboratory

# Certificate of Calibration

校正證書

Certificate No.: C176148

證書編號

6.2 Time Weighting

	UUT Setting		Applied Value		UUT	IEC 61672
Range	Frequency	Time	Level	Freq.	Reading	Class 1 Spec.
(dB)	Weighting	Weighting	(dB)	(kHz)	(dB)	(dB)
30 - 130	A	FAST	94.00	1	94.0	Ref.
		SLOW			94.0	± 0.3

#### 6.3 Frequency Weighting

A-Weighting 6.3.1

	UUT Setting		Appli	ed Value	UUT	IEC 61672
Range (dB)	Frequency Weighting	Time Weighting	Level (dB)	Freq.	Reading (dB)	Class 1 Spec. (dB)
30 - 130	A	FAST	94.00	63 Hz	67.7	$-26.2 \pm 1.5$
				125 Hz	77.8	-16.1 ± 1.5
				250 Hz	85.3	$-8.6 \pm 1.4$
				500 Hz	90.7	-3.2 ± 1.4
		i		1 kHz	94.0	Ref.
				2 kHz	95.2	$+1.2 \pm 1.6$
				4 kHz	95.0	$+1.0 \pm 1.6$
				8 kHz	92.9	-1.1 (+2.1; -3.1)
				12.5 kHz	89.7	-4.3 (+3.0; -6.0)

6.3.2 C-Weighting

C TYVIBINIA,	UUT Setting		Applie	ed Value	UUT	IEC 61672
Range (dB)	Frequency Weighting	Time Weighting	Level (dB)	Freq.	Reading (dB)	Class 1 Spec. (dB)
30 - 130	C	FAST	94.00	63 Hz	93.1	-0.8 ± 1.5
				125 Hz	93.8	-0.2 ± 1.5
				250 Hz	94.0	$0.0 \pm 1.4$
		,		500 Hz	94.0	$0.0 \pm 1.4$
	'			1 kHz	94.0	Ref.
				2 kHz	93.8	-0.2 ± 1.6
				4 kHz	93.2	-0.8 ± 1.6
				8 kHz	91.0	-3.0 (+2.1; -3.1)
				12.5 kHz	87.7	-6.2 (+3.0; -6.0)

本證書所載校正用之測試器材均可瀏源至國際標準。 局部復印本證書需先獲本實驗所書而批准。

Sun Creation Engineering Limited - Calibration & Testing Laboratory c/o 4/E. Ising Shan Wan Exchange Building, I Hing On Lane, Tuen Mun, New Territories, Hong Kong 範囲工程行限公司 - 校正及檢測實驗所 c/o 香港海界尼門與安里上一號計目結構與四樓 Tel·電話: 2927-2606 Fax/傳真: 2744-8986 E-mail/電郵: callab@suncreation.com Website/

E-mail/電郵: eallab@suncreation.com Website/钢床: www.suncreation.com

The test equipment used for calibration are traceable to the Nation Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory



Sun Creation Engineering Limited

Calibration and Testing Laboratory

# Certificate of Calibration 校正證書

Certificate No.: C176148

證書編號

Remarks: - Mfr's Spec. : IEC 61672 Class 2

- Uncertainties of Applied Value : 94 dB : 63 Hz - 125 Hz :  $\pm$  0.35 dB

250 Hz - 500 Hz :  $\pm 0.30 \text{ dB}$ 1 kHz  $: \pm 0.20 \text{ dB}$ 2 kHz - 4 kHz : ± 0.35 dB 8 kHz  $: \pm 0.45 \text{ dB}$  $: \pm 0.70 \text{ dB}$ 12.5 kHz

104 dB : 1 kHz : ± 0.10 dB (Ref. 94 dB)

114 dB : 1 kHz : ± 0.10 dB (Ref. 94 dB)

- UUT Microphone Model No.: MA220 (ACO7052) & S/N: 62324

- The uncertainties are for a confidence probability of not less than 95 %.

#### Note:

Only the original copy or the laboratory's certified true copy is valid.

The values given in this Certificate only relate to the values measured at the time of the test and any uncertainties quoted will not include allowance for the equipment long term drift, variations with environment changes, vibration and shock during transportation, overloading, mis-handling, or the capability of any other laboratory to repeat the measurement. Sun Creation Engineering Limited shall not be liable for any loss or damage resulting from the use of the equipment.

The test equipment used for calibration are traceable to the Nation Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior

本證書所載按正用之測試器材均可測源至國際標準。 局部複印本證書醫先獲本實驗所書面批准。

Sun Creation Engineering Limited Calibration & Testing Laboratory
e/o 4年 Tsing Shan Wan Exchange Building, I Hing On Lane, Tuen Mnn, New Territories, Hong Kong
確創工程有限公司 接正及檢測實驗所
e/o 看達新界电門與安里 號台口灣機裏四機

E-mail/電郵: callab@suncreation.com Website/電功: www.suncreation.com Tel/電話: 2927 2606 Fax/傳真: 2744 8986



# Sun Creation Engineering Limited

Calibration and Testing Laboratory

# Certificate of Calibration 校正證書

Certificate No.: C175265

證書編號

ITEM TESTED / 送檢項目 (Job No. / 序引編號: IC17-2132) Date of Receipt / 收件日期: 14 September 2017

Description / 儀器名稱 :

Acoustic Calibrator

Manufacturer/製造商

Pulsar

Model No. / 型號 Serial No./編號

105 63705

Supplied By / 委託者

Acumen Environmental Engineering and Technologies Co., Ltd.

Lot 11, Tam Kon Shan Road, North Tsing Yi, N.T.

TEST CONDITIONS / 測試條件

Temperature / 温度 : (23 ± 2)°C

Relative Humidity / 相對濕度 : (55 ± 20)%

Line Voltage / 電壓:

#### TEST SPECIFICATIONS / 測試規範

Calibration check

DATE OF TEST / 測試日期

17 September 2017

#### TEST RESULTS / 測試結果

The results apply to the particular unit-under-test only.

The results do not exceed manufacturer's specification.

The results are detailed in the subsequent page(s).

The test equipment used for calibration are traceable to National Standards via:

- The Government of The Hong Kong Special Administrative Region Standard & Calibration Laboratory
- Agilent Technologies / Keysight Technologies
- Rohde & Schwarz Laboratory, Germany
- Fluke Everett Service Center, USA

Tested By 測試

H T Wong Technical Officer

Certified By 核證

K C Lee Engineer

Date of Issue 簽發日期

21 September 2017

The test equipment used for calibration are traceable to the Nation Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior

本證書所載校正用之測試器材均可測源至國際標準。局部複印本證書需先獲本實驗所書面批准。

Sun Creation Engineering Limited – Calibration & Testing Laboratory e/o 4年, Tsing Shan Wan Exchange Building, 1 Hing On Lane, Tuen Mun, New Territories, Hong Kong 維朗上程行限公司 - 校正及绘测电影符。 音影影性出門眼安里一號音比過程暖晚叫樓 Tel/電話: 2927 2606 Fax/得真: 2744 8986 E-mail/電郵: callab@sunercation.com Website/

E-mail/電郵: callab@sunercation.com Website/網址: www.sunercation.com

Page 1 of 2



# Certificate of Calibration 校正證書

Certificate No.: C175265

證書編號

- The unit-under-test (UUT) was allowed to stabilize in the laboratory for over 12 hours before the commencement of
- The results presented are the mean of 3 measurements at each calibration point.
- Test equipment:

Equipment ID TST150A

Description

Certificate No.

CL130 CL281

Measuring Amplifier

C161175

Universal Counter

C173864

Multifunction Acoustic Calibrator

PA160023

- Test procedure: MA100N.
- Results: 5.

Sound Level Accuracy

UUT	Measured Value	IEC60942:2003	Uncertainty of Measured Value
Nominal Value	(dB)	Class 1 Spec.	(dB)
94 dB, 1 kHz	93.7	± 0.4 dB	± 0.2

Mfr's Spec. : IEC60942:2003 Class 1

5.2 Frequency Accuracy

UUT Nominal	Measured Value	Mfr's	Uncertainty of Measured Value (Hz)
Value (kHz)	(kHz)	Spec.	
1	1.000	1 kHz ± 1 %	± 1

Remark: - The uncertainties are for a confidence probability of not less than 95 %.

Only the original copy or the laboratory's certified true copy is valid.

The values given in this Certificate only relate to the values measured at the time of the test and any uncertainties quoted will not include allowance for the equipment long term drift, variations with environment changes, vibration and shock during transportation, overloading, mis-handling, or the capability of any other laboratory to repeat the measurement. Sun Creation Engineering Limited shall not be liable for any loss or damage resulting from the use of the equipment.

Sun Creation Engineering Limited — Calibration & Testing Laboratory coo 4年. Tsing Shan Wan Exchange Building, 1 Hing On Lane, Tuen Mun, New Territories, Hong Kong 補例工程有限公司 - 校正及檢讀性驗所 co 齐港新华七門與英里·號子日/市民機與四樓 Tel/電話: 2927 2606 — Fax/傳養: 2744 8986 — E-mail/電郵: callab@suncreation.com Website/fi

E-mail 電郵: callab@suncreation.com Website/制止: www.suncreation.com

The test equipment used for calibration are traceable to the Nation Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior 本證書所載按正用之測試器材均可測源至國際標準。 局部復印本證書需先獲本實驗所書面批准。

Monthly Environmental Monitoring & Auditing Report Contract No. HY/2014/09 Central Kowloon Route – Ho Man Tin Access Shaft
Appendix J
The Certification of Laboratory with HOKLAS
Accredited Analytical Tests



Hong Kong Accreditation Service 香港認可處

#### **Certificate of Accreditation**

認可證書

This is to certify that 特此證明

# ALS TECHNICHEM (HK) PTY LIMITED

11/F., Chung Shun Knitting Centre, 1-3 Wing Yip Street, Kwai Chung, New Territories, Hong Kong 香港新界葵涌永業街1-3號忠信針織中心11樓

has been accepted by the HKAS Executive, on the recommendation of the Accreditation Advisory Board, as a 為香港認可處執行機關根據認可諮詢委員會建議而接受的

# **HOKLAS Accredited Laboratory** 「香港實驗所認可計劃」認可實驗所

This laboratory meets the requirements of ISO / IEC 17025 : 2005 - General requirements for the competence 此實驗所符合ISO / IEC 17025: 2005 - 《测試及校正實驗所能力的通用規定》所訂的要求 of testing and calibration laboratories and it has been accredited for performing specific tests or calibrations as 獲認可進行載於香港實驗所認可計劃(認可實驗所名冊)內下遙測試類別中的指定 listed in the HOKLAS Directory of Accredited Laboratories within the test category of 测试或校正工作

#### **Environmental Testing** 環境測試

This laboratory is accredited in accordance with the recognised international Standard ISO / IEC 17025 ; 2005. 本實驗所乃根據公認的國際標準 ISO / IEC 17025 ; 2005 獲得認可。 This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory 透項認可資格深示在指定範疇所開的技術能力及實驗所質量管理關系的運作 quality management system (see joint IAF-ILAC-ISO Communiqué), (見國際認可論權、國際實驗所認可合作組織及國際標準化組織的聯合公報)。

The common seal of the Hong Kong Accreditation Service is affixed hereto by the authority of the HKAS Executive 香港認可處根據認可處執行機關的權限在此蓋上通用印章

CHAN Sing Sing, Terence, Executive Administrator

執行幹事 陳成城 Issue Date: 5 May 2009

簽發日期:二零零九年五月五日

Registration Number : NONLAS 066

註冊號碼:

Date of First Registration: 15 September 1995 首次註冊日期:一九九五年九月十五日

This certificate is issued subject to the terms and conditions laid down by HKAS 本题者按照香港如可應訂立的複數及條件發出

L 000552



**Hong Kong Accreditation Service** 香港認可處

#### **Certificate of Accreditation**

認可證書

This is to certify that 特此證明

#### **ACUMEN LABORATORY AND TESTING LIMITED**

浩科檢測中心有限公司

Lot 12, Tam Kon Shan Road, North Tsing Yi, New Territories, Hong Kong 香港新界青衣北担杆山路12路段

has been accepted by the HKAS Executive, on the recommendation of the Accreditation Advisory Board, as a 在認可諮詢委員會的建議下獲香港認可處執行機關接受為

> **HOKLAS Accredited Laboratory** 「香港實驗所認可計劃」認可實驗所

This laboratory meets the requirements of ISO/IEC 17025:2005 and it has been accredited for performing specific tests or calibrations as listed in the scope of accreditation within the test category of

#### **Environmental Testing**

此實驗所符合ISO/IEC 17025:2005所訂的要求 並獲認可進行載於認可範圍內下述測試類別中的指定測試或校正工作

# 環境測試

This accreditation to ISO/IEC 17025:2005 demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (see joint IAF-ILAC-ISO Communiqué). 此項 ISO/IEC 17025:2005 的認可資格證明此實驗所具備指定範疇內所須的技術能力並 實施一套實驗所質量管理體系(見國際認可論壇、國際實驗所認可合作組織及國際標準化組織的聯合公報)。

The common seal of the Hong Kong Accreditation Service is affixed hereto by the authority of the HKAS Executive 現經香港認可處執行機關授權在此蓋上香港認可處的印章

WONG Wang-wah, Executive Administrator

執行幹事 黃宏華 Issue Date: 16 July 2014

簽發日期:二零一四年七月十六日

Registration Number: HOKLAS 241

註冊號碼:


Date of First Registration: 16 July 2014 首次註冊日期:二零一四年七月十六日

This certificate is issued subject to the terms and conditions laid down by HKAS 本證書按照香港認可處訂立的條款及條件發出

L 001195

Monthly Environmental Monitoring & Auditing Report
Contract No. HY/2014/09 Central Kowloon Route – Ho Man Tin Access Shaft

Appendix K
Location Plan of Noise and Air Quality
Monitoring Station

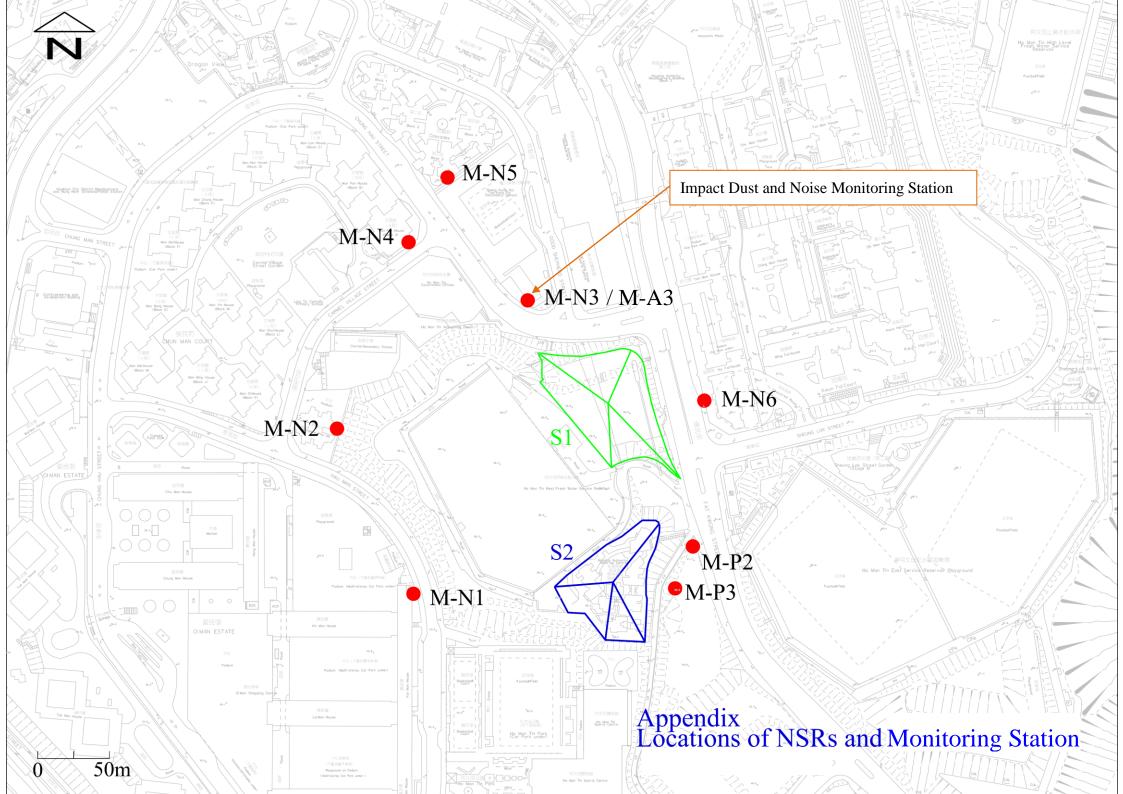

Contract No. HY/2014/09 Central Kowloon Route – Ho Man Tin Access Shaft	
A 11 T	
Appendix L	
Monitoring Data (Air Monitoring)	
Womtoring Data (1 in Womtoring)	

SKH Tsoi Kung Po Secondary School Location:

4,9,15,21 and 27 June 2018 Monitoring date:

Parameter: TSP 1-hour Other Factors nearby traffic

	1-hour TSP (μg/m³)							
Date	Weather	Start Time	1 <sup>st</sup> Hour (μg/m³)	2 <sup>nd</sup> Hour (μg/m³)	3 <sup>rd</sup> Hour (μg/m³)			
4/6/2018	Cloudy	14:03	70	49	54			
9/6/2018	Fine	14:20	66	71	61			
15/6/2018	Cloudy	15:16	88	108	113			
21/6/2018	Cloudy	15:33	64	80	54			
27/6/2018	Cloudy	14:27	54	78	72			

# Contract No. HY/2014/09 Environmental Monitoring & Auditing

Location: SKH Tsoi Kung Po Secondary School

Monitoring date: 4,9,15,21 and 27 June 2018

Parameter: TSP 24-hour
Other Factors nearby traffic

ſ	Date of Calibration:	29-May-18	Slop =	26.983
	Calibration due date:	13-Jun-18	Intercept =	14.653
ſ	Date of Calibration:	15-Jun-18	Slop =	27.290
	Calibration due date:	30-Jun-18	Intercept =	14.548

Start Date	Weather Condition	Elapse Time		Chart Reading		Avg Air Temp	Avg Atmosphe ric Pressure	Flow Rate	Standard Air Volume	Filter Weight	(g)	Particulate weight	Conc.		
		Initial	Final	Actual (min)	Min	Max	Avg	(°C)	(mm Hg)	(m³/min)	( <b>m</b> <sup>3</sup> )	Initial	Final	(g)	$(\mu g/m^3)$
4/6/2018	Cloudy	497.4	521.4	1440.0	49	51	50	28	1007.4	1.90	2737	2.6625	2.7091	0.0466	17
9/6/2018	Fine	521.4	545.4	1440.0	44	47	45.5	28.6	999.1	1.65	2370	2.6557	2.6859	0.0302	13
15/6/2018	Cloudy	545.5	569.5	1440.0	49	50	49.5	27.1	1001.8	1.85	2663	2.6454	2.6702	0.0248	9
21/6/2018	Cloudy	569.7	593.7	1440.0	46	57	51.5	30.0	1005.9	1.94	2799	2.6578	2.6768	0.0190	7
27/6/2018	Cloudy	593.8	617.8	1440.0	44	45	44.5	29.2	1010.0	1.62	2331	2.6569	2.686	0.0291	12

Appendix M
Monitoring Data (Noise)

**Monthly Environmental Monitoring & Auditing Report** Contract No. HY/2014/09 Central Kowloon Route – Ho Man Tin Access Shaft

SKH Tsoi Kung Po Secondary School Location:

Monitoring date: 4,9,15,21 and 27 June 2018

 $L_{eq}, L_{10}, \ L_{90}$ Parameter: nearby traffic Other Factors

# Noise Monitoring data:

Date	Weather	Start Time	-	End Time	$L_{Aeq}$	$L_{10}$	L <sub>90</sub>
4/6/2018	Cloudy	14:01	-	14:31	63.7	65.0	58.0
9/6/2018	Fine	14:18	-	14:48	64.3	65.6	57.9
15/6/2018	Cloudy	15:15	-	15:45	64.3	65.9	60.6
21/6/2018	Cloudy	15:34	-	16:04	63.4	64.9	59.2
27/6/2018	Cloudy	14:27	-	14:57	62.6	64.1	57.4

Monthly Environmental Monitoring & Auditing Report Contract No. HY/2014/09 Central Kowloon Route – Ho Man Tin Access Shaft
Appendix N
Waste Flow Table
vvaste i iov i abie

# **Monthly Summary Waste Flow Table**

Name of Department: Highways Department

Monthly Symmetry Wests Flow Toble for June 2018

Contract No. / Works Order No.: <u>HY/2014/09</u>

Monthly Summary Waste Flow Table for June 2018

[to be submitted not later than the 15<sup>th</sup> day of each month following reporting month] (All quantities shall be rounded off to 3 decimal places.)

	Actual Quantities of <u>Inert</u> Construction Waste Generated Monthly								
Month	(a)=(b)+(c)+(d)+(e) Total Quantity Generated	(b) Hard Rock and Large Broken Concrete	(c) Reused in the Contract	(d) Reused in other Projects	(e) Disposed of as Public Fill	Imported Fill			
	(in '000m <sup>3</sup> )	(in '000m <sup>3</sup> )	(in '000m <sup>3</sup> )	(in '000m <sup>3</sup> )	(in '000m <sup>3</sup> )	(in '000m <sup>3</sup> )			
Jan	0.309	0.127	0.000	0.000	0.182	0.000			
Feb	1.343	1.156	0.000	0.000	0.187	0.000			
Mar	0.871	0.061	0.000	0.000	0.810	0.000			
Apr	0.315	0.000	0.000	0.000	0.315	0.000			
May	1.218	0.000	0.000	0.000	1.218	0.000			
Jun	1.218	0.000	0.000	0.000	1.218	0.000			
Sub-total	5.274	1.344	0.000	0.000	3.930	0.000			
Jul									
Aug									
Sep									
Oct									
Nov									
Dec									
Total	5.274	1.344	0.000	0.000	3.930	0.000			

	Actual Quantities of Non-inert Construction Waste Generated Monthly									
Month	Metals		Paper/ cardboard packaging		Plastics		Chemical Waste		Others, e.g. General Refuse disposed at Landfill	
	(in '0	00kg)	(in '0	00kg)	(in '00	00kg)	(in '0	000kg)	(in '000m <sup>3</sup> )	
	generated	recycled	generated	recycled	generated	recycled	generated	recycled	generated	
Jan	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.014	
Feb	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.016	
Mar	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.006	
Apr	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.005	
May	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.008	
Jun	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.006	
Sub-total	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.055	
Jul										
Aug										
Sep										
Oct										
Nov										
Dec										
Total	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.055	

Appendix O
Statistics on Complaint, Notifications of
Summons and Successful Prosecutions

# Statistical Summary of Exceedances

Air Quality								
Location	Action Level	Limit Level	Total					
M-A3	0	0 0						
	Noise							
Location	Action Level	Limit Level	Total					
M-N3	0	0	0					

# Statistical Summary of Environmental Complaints

Reporting	Environmental Complaint Statistics							
Period	Frequency	Cumulative	Complaint Nature					
1 Jun 2018 -	0	0	N/A					
30 Jun 2018	0	0	N/A					

# Statistical Summary of Environmental Summons

Reporting	Environmental Summons Statistics			
Period	Frequency	Cumulative	Details	
1 Jun 2018 -	0	0	N/A	
30 Jun 2018	U	O O	IV/A	

# Statistical Summary of Environmental Prosecution

Reporting	Reporting Environmental Prosecution Statistics						
Period	Frequency	Cumulative	Details				
1 Jun 2018 -	0	0	NI/A				
30 Jun 2018	U	U	N/A				

Monthly Environmental Monitoring & Auditing Report Contract No. HY/2014/09 Central Kowloon Route – Ho Man Tin Access Shaft
Appendix P
Monitoring Schedule of the Coming Month
8 8

Impact Monitoring Schedule for HMTS									
Jul-18									
Sun	Mon	Tue		Thur	Fri	Sat			
					5	6			
			Impact						
			impact						
			TSP-1hr & TSP-24hr monitoring						
			for						
			M-A3						
			Noise monitoring for						
			M-N3						
7	8	9	10	11	12	13			
		Impact				Impact			
		TSP-1hr & TSP-24hr monitoring				TSP-1hr & TSP-24hr monitoring			
		for				for			
		M-A3				M-A3			
		Noise monitoring for				Noise monitoring for			
		M-N3				M-N3			
15	16	17	18	19	20	21			
					Impact				
					TSP-1hr & TSP-24hr monitoring				
					for				
					M-A3				
					Noise monitoring for				
					M-N3				
22	23	24	25		27	28			
				Impact					
				TSP-1hr & TSP-24hr monitoring					
				for					
				M-A3					
				Noise monitoring for					
				M-N3					
29	30	31							
23	-	31		- december of the second of th					
				- The second					
				Section 1					
				**************************************					
				**************************************					
				The state of the s		The state of the s			
*Domaile No construction and a self-	porformed on public bolidous 1/7			1	<u> </u>				
*Remark: No construction works will be performed on public holiday 1/7									