
Vol. 3 of 5 FEP-03/457/2013/D Central Kowloon Route Yau Ma Tei East Contract No. HY/2014/08 March 2022



AM by mh.leung am\Drawing\Use 26-Sep-19 11:47:42 S:\6. Drauahtina Te 5 Printed



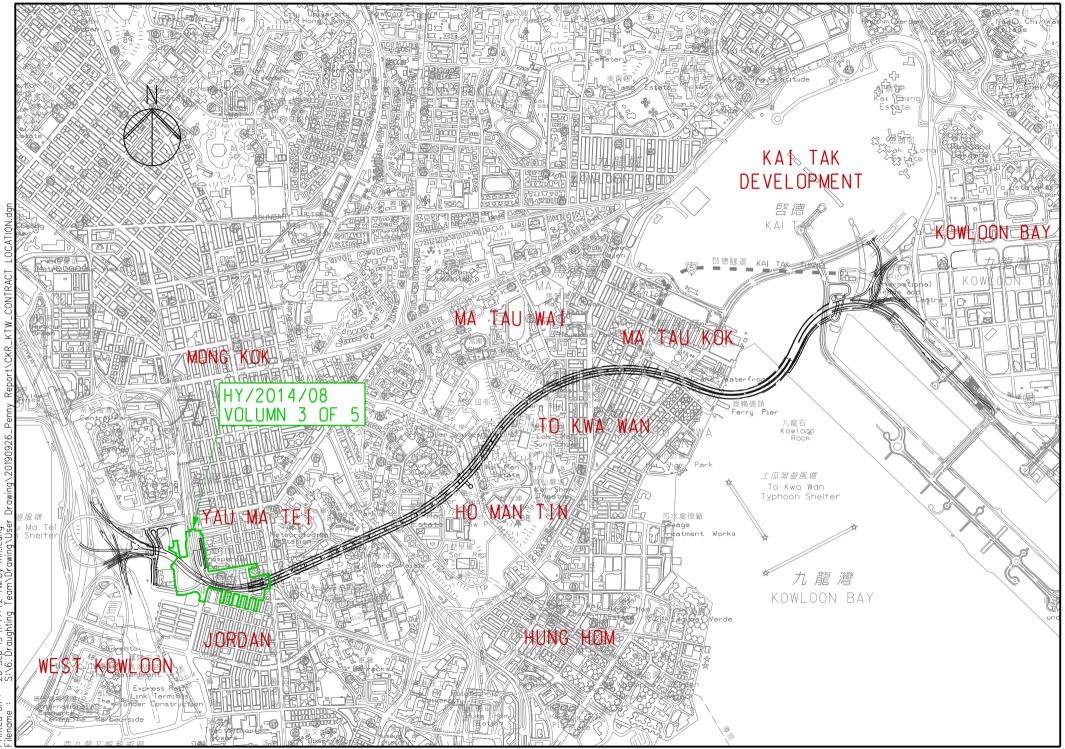

Environmental Permit No. EP-457/2013/D

Central Kowloon Route

Independent Environmental Checker Verification

Works Contract:	Yau Ma Tei East (HY/2014/08)	
-----------------	------------------------------	--

Reference Document/Plan

Document/ Plan to be -Certified / Verified:	Monthly EM&A Report No.48 (March 2022)
Date of Report:	12 April 2022 (Rev.1)
Date received by IEC:	12 April 2022

Reference EP Condition

Environmental Permit Condition:

Submission of Monthly EM&A Report of the Project

3.4 Four hard copies and one electronic copy of monthly EM&A Report shall be submitted to the Director within 2 weeks after the end of each reporting month throughout the entire construction period. The EM&A Reports shall include a summary of all non-compliance. The submissions shall be certified by the ET Leader and verified by the IEC as complying with the requirements as set out in the EM&A Manual before submission to the Director. Additional copies of the submission shall be provided to the Director upon request by the Director.

3.4

IEC Verification

I hereby verify that the above referenced document/plan complies with the above referenced condition of EP-457/2013/D.

Mondy 20.

Ms Mandy To Independent Environmental Checker Date:

12 April 2022

Our ref: 0436942_IEC Verification Cert_YMTE_Monthly EM&A Rpt No.48.docx



Acuity Sustainability Consulting Limited

Unit E, 12/F, Ford Glory Plaza, No. 37-39 Wing Hong Street, Cheung Sha Wan Kowloon, Hong Kong Tel.: (852) 2698 6833 Fax.: (852) 2333 1316

Build King – SK ecoplant Joint Venture

Central Kowloon Route Contract HY/2014/08

Section of Yau Ma Tei East

Monthly EM&A Report No. 48

(Period from 1 to 31 March 2022)

Rev. 1

(12 April 2022)

	Name	Signature
Prepared by	Katrina K.S. Chui (Assistant Environmental Consultant)	fil
Checked & Reviewed by	Y.H.LAW (Senior Environmental Consultant)	Malar
Approved & Certified by	Kevin W. M. Li (Environmental Team Leader)	K.

TABLE OF CONTENTS

EXECUTIVE SUMMARY

1.	BASIC PROJECT INFORMATION	7
2.	Environmental Status	. 10
3.	MONITORING RESULTS	. 12
4.	SUMMARY OF COMPLAINTS, NOTIFICATION OF SUMMONS AND PROSECUTIONS	. 20
5.	EM&A SITE INSPECTION	. 22
6.	FUTURE KEY ISSUES	. 23
7.	CONCLUSION AND RECOMMENDATIONS	. 25

LIST OF APPENDICES

- A. Alignment and Works Area for the Contract No. HY/2014/08
- B. Construction Programme
- C. Project Organization Chart
- D. Dust Event-Action Plan (EAP)
- E. Noise Event-Action Plan (EAP)
- F. Environmental Mitigation Implementation Schedule (EMIS)
- G. Monitoring Schedules of the Reporting Month
- H. Calibration Certificate (Air Monitoring)
- I. Calibration Certificate (Noise)
- J. The Certification of Laboratory with HOKLAS Accredited Analytical Tests
- K. Location Plan of Noise and Air Quality Monitoring Station
- L. Monitoring Data (Air Monitoring)
- M. Monitoring Data (Noise)
- N. Waste Flow Table
- O. Statistics on Complaint, Notifications of Summons and Successful Prosecutions
- P. Monitoring Schedule of the Coming Month
- Q. Interim Report for the Complaint

EXECUTIVE SUMMARY

- A.1 Build King SK ecoplant Joint Venture ("Contractor") commenced the construction works of Highway Department (HyD) Central Kowloon Route Contract No. HY/2014/08 – Section of Yau Ma Tei East ("The Project") on 20 April 2018. This is the 48th monthly Environmental Monitoring and Audit (EM&A) report presenting the EM&A works carried out during the period from 1 March 2022 to 31 March 2022.
- A.2 A summary of the construction works reported by Main Contractor for the Project during the reporting month is listed below.

Construction Activities undertaken

- Construct D-wall panels, pumping test, excavation to roof slab & construct roof slab at Zone B
- Site formation, predrilling, remedial works for land contamination, grout curtain wall & guide wall & D-wall at Zone B
- Construction of Stage 3 D-wall panels, soil Improvement Works, Sheet Piling at Zone C
- Predrilling, guide wall & D-wall panels and pipe piles, pre-boring & transfer beams at Zone D
- Diversion of DN 900 Sewer Pipes (ELS, Excavation and Pipe Laying) along Kansu St. at Zone F/B3
- Predrilling, pipe piles & divert DN450 watermain & DN1800 Drainage at Zone G
- ELS, Excavation and Construction of Pad Footing, Piers and Portal Frame for Gascoigne Road flyover
- Construct bridge deck for 2 spans at Gascoigne Road flyover
- Construct socketed H piles, pile caps, ground beams and RC columns of Noise Enclosure at Zone D
- A.3 A summary of regular construction noise and construction dust monitoring activities in this reporting period is listed below:

D 1	· · · · · · · · · · · · · · · · · · ·	• • •	• • • • • • • • • • • • • • • • • • • •	1 .	1	working hours	
Roamor	construction	nnico	monitoring	aurina	normai	working nourg	
NUZUIAI	consu acuon	HUISC.	momorime	uuime	nvimai	WULKINZ NUULS	

W-N1A, W-P11, W-N18, W-N25A	5 times
Construction dust (24-hour TSP) monitoring	
W-A1	5 times
W-A6	5 times
Construction dust (1-hour TSP) monitoring	
W-A1, W-A6	15 times

- A.4 Bi-weekly inspection of the implementation of landscape and visual mitigation measures was conducted on 3, 17 and 31 March 2022. Details of the audit findings and implementation status are presented in Section 5.
- A.5 Joint weekly site inspections were conducted by representatives of Environmental Team (ET), Contractor and Engineer on 3, 10, 17, 24 and 31 March 2022. One joint site inspection with IEC was also undertaken on 24 March 2022. Details of the audit findings and implementation status are presented in Section 5.
- A.6 Details of waste management are presented in Section 3.

- A.7 Four Action Levels of construction noise were triggered during the reporting period as four documented complaints were received on 1, 15, 23 and 30 March 2022 related to construction noise from works areas at Zone A, B and C. No exceedance of Limit Level of construction noise was recorded in the reporting month. No exceedance of the Action and Limit Levels of 24-hour TSP and 1-hour TSP was recorded during the reporting month.
- A.8 Four noise related complaints and one non-project related complaint were received on 1, 15, 23 and 30 March 2022. After investigation with Contractor, precautionary measures had been proposed to the Contractor by ET. The interim reports for the complaints are shown in Appendix Q.
- A.9 No non-compliance was reported in the reporting month.
- A.10 No notification of summon or prosecution was received in this reporting month.
- A.11 A summary of the construction activities provided by Main Contractor in the next reporting month is listed below:

Construction Activities to be undertaken

- Excavation / strut & waling works below ceiling slab at Zone A.
- Spray Waterproofing Membrane & Concrete Screeding onto newly constructed roof slab of Zone B. Installation of UU Hanger Support, exposure of box culvert and plugging of abandoned pipe at Zone B.
- Complete pipe piles construction in lieu of D-wall, construction of buttress wall and install RW, OW, PW at Zone B.
- TAM grouting between Zones B2 & C1, install king posts, excavate and construct temporary buttress wall at Zones C1/C2 & C3 and excavation to roof slab and construct part of roof slab at C3.
- Construction of last D-wall, remaining pipe piles, utilities diversion works, buttress wall, installation of king posts and erection of temporary traffic deck at Zone D.
- DN450 FW Gate Valve installation by WSD, backfilling including extract sheet piles and implement TTA at Zone B3.
- Continue for partial demolition works of Cable Tunnel A (jet grouting & pipe piling works) at Zone F.
- Continue for diversion work of DN1800 drainage (stage 1) at Zone G.
- Works for RGRF at HKAA area: Install temporary support & construction of Portal Frame span across Piers P7L and P7R and installation of temporary support for demolition of GRF Portion 1 (existing 3 concrete beams).
- Bridge Works:
 - i. FT1 assembly and bridge deck construction for P4L.
 - ii. FT2 assembly and bridge deck construction for P6L.
 - iii. Complete pier construction and commence pier head construction for P3L.
 - iv. Complete modification of traffic island at east end (above Temple Street).
- Continue socketed H-piling works for middle/east foundation and west side of F02 Noise Enclosure in Zone 3, ELS and construction works for pile caps and ground beams construction for middle/east foundation for Noise Enclosure.
- Continue parapet modification works for Noise Enclosure in Zone 3 on the bridge deck of FSF.
 - Works at Zone 2 Noise Enclosure scheduled as the following:
- i. Column E Permanent socketed H-piling works;

Construction Activities to be undertaken

- ii. Column G Set back road kerbs under TTA 0524 and implement TTA (TTA 0518), trial pit excavation and permanent diversion of uncharted 1200mm dia. drainage pipe;
- iii. Column C Trial pit excavation & commence temporary socketed H-piling works;
- iv. Column A Construction of 2 nos. Barrette Wall.
- Noise Enclosure steelworks fabrication at Fabrication Yard in Zhuhai, China.
- Monitoring of instrumentation for all areas.

1. BASIC PROJECT INFORMATION

- 1.1. Central Kowloon Route (CKR) is a 4.7 km long dual 3-lane trunk road in Central Kowloon linking Yau Ma Tei Interchange in West Kowloon with the road network on Kai Tak Development and Kowloon Bay in East Kowloon.
- 1.2. The Central Kowloon Route Design and Construction Environmental Impact Assessment Report (Register No.: AEIAR-171/2013) was approved with conditions by the Environmental Protection Department (EPD) on 11 July 2013. An Environmental Permit (EP 457/2013) was issued on 9 August 2013. Variations of EP (VEP) was applied for and the EP (EP-457/2013/C) was issued by EPD on 16 January 2017. Variations of EP (VEP) was subsequently applied for and the latest EP (EP-457/2013/D) was issued by EPD on 15 June 2021. A Further EP (FEP-03/457/2013/D) was issued by EPD on 5 November 2021.
- 1.3. The construction of the CKR had been divided into different sections. This Contract No. HY/2014/08 Section of Yau Ma Tei East (YMTE) covers part of the construction activities located at Yau Ma Tei under the EP and FEP which includes:
 - Section of Yau Ma Tei East
 - i. Construction of Cut-and-Cover Tunnel in compliance with all statutory requirements and the requirements specified under the Contract while maintaining the traffic with all necessary provisions
 - ii. Construction and subsequent handover of Yau Ma Tei Access Shaft for facilitating the access and use by the contractor of Central Kowloon Route Central Tunnel contract
 - Demolition of existing buildings including Yau Ma Tei Multi-storey Carpark Building, Yau Ma Tei Specialist Clinic Extension Building and Yau Ma Tei Jade Hawker Bazaars
 - iv. Demolition and re-provisioning of Gascoigne Road Flyover(GRF) and the underpinning works for the existing Ferry Street Flyover and Yau Ma Tei Police Station New Wing Building
 - v. Construction of civil provisions and coordination with the contractor of Central Kowloon Route - Tunnel Electrical & Mechanical contract
 - vi. Design and construction of Noise Barrier Works
 - vii. Prepare TTA proposals, discuss at TMLG meeting and obtain its agreement and approval/ endorsement from relevant authorities at suitable times to enable the execution of the Works

The alignment and works area for the Contract No. HY/2014/08 - are shown in Appendix A.

1.4. A summary of the major construction activities undertaken in this reporting period is shown in Table 1.1. The construction programme is presented in Appendix B.

Table 1.1 Summary of the Construction Activities reported by Main Contractor during the Reporting Month

Construction Activities undertaken

- Construct D-wall panels, pumping test, excavation to roof slab & construct roof slab at Zone B
- Site formation, predrilling, remedial works for land contamination, grout curtain wall & guide wall & D-wall at Zone B
- Construction of Stage 3 D-wall panels, soil Improvement Works, Sheet Piling at Zone C
- Predrilling, guide wall & D-wall panels and pipe piles, pre-boring & transfer beams at Zone D
- Diversion of DN 900 Sewer Pipes (ELS, Excavation and Pipe Laying) along Kansu St. at Zone F/B3
- Predrilling, pipe piles & divert DN450 watermain & DN1800 Drainage at Zone G
- ELS, Excavation and Construction of Pad Footing, Piers and Portal Frame for Gascoigne Road flyover
- Construct bridge deck for 2 spans at Gascoigne Road flyover
- Construct socketed H piles, pile caps, ground beams and RC columns of Noise Enclosure at Zone D
 - 1.5. The project organisational chart specifying management structure and contact details are shown in Appendix C.
 - 1.6. A summary of the valid permits, licences, and /or notifications on environmental protection for this Project is presented in Table 1.2.

Table 1.2 Summary of the Status of Valid Environmental Licence

D				1	
Permit/ Licences/	Valid	Period			
Notification	From	То	Status	Remark	
/Reference No.	FIOIII	10			
Environmental Permit					
EP-457/2013/D	15 Jun 2021	End of Project	Valid	-	
Further Environmental I	Permit				
FEP-03/457/2013/D	5 Nov 2021	End of Project	Valid		
Wastewater Discharge Lie	cense				
WT00030660-2018	28 Mar 2018	31 Mar 2023	Valid	-	
Notification of Constructi	on Works under	the Air Pollution	n Control (Construction	on Dust) Regulation	
471691	14 Sep 2021	End of Project	Notified	-	
Chemical Waste Produce	r Registration				
WPN5213-225-B2526-01	14 Mar 2018	End of Project	Valid	-	
Billing Account for Dispo	sal of Constructi	on Waste			
7029997	1 Feb 2018	End of Project	Valid	-	
Construction Noise Permi	it				
				Construction Noise	
GW-RE1171-21	25 Nov 2021	22 Apr 2022	Valid	Permit at Jade Hawker	
				Bazaar Building	
		Valid until	Construction Noise		
GW-RE1038-21	30 Dec 2021	GW-RE1038-21 30 Dec 2021 29 Mar 2022	29 Mar 2022	Permit for D-wall at	
			2) wiai 2022	Zone B2	
GW-RE1094-21	2 Nov 2021	GW-RE1094-21 2 Nov 2021 1 May 2022	Valid	Valid	Construction Noise
GW-RE1074-21	21101 2021	1 Iviay 2022	v anu	Permit at Zone D & G	

Notification, Permit and Documentations

Permit/ Licences/	Valid	Period		
Notification /Reference No.	From	То	Status	Remark
GW-RE1095-21	2 Nov 2021	1 May 2022	Valid	Construction Noise Permit at Multi-storey Carpark Building
GW-RE1093-21	2 Nov 2021	1 May 2022	Valid	Construction Noise Permit at Zone A & B
GW-RE0881-21	10 Sep 2021	9 Mar 2022	Valid until 9 Mar 2022	Construction Noise Permit at Zone 3
GW-RE0285-22	30 Mar 2022	29 Jun 2022	Valid from 30 Mar 2022	Construction Noise Permit at Zone B2
GW-RE0087-22	28 Jan 2022	27 Apr 2022	Valid	Construction Noise Permit at Zone D & P4
GW-RE0054-22	28 Jan 2022	27 Apr 2022	Valid	Construction Noise Permit at P6
GW-RE0093-22	28 Jan 2022	27 Apr 2022	Valid	Construction Noise Permit at Multi-storey Carpark Building
GW-RE0129-22	15 Feb 2022	31 Mar 2022	Valid until 31 Mar 2022	Construction Noise Permit for Central Divider Removal at GRF
Marine Dumping Permit	1			
EP/MD/22-091	23 Dec 2021	22 Jun 2022	Valid	Type 1- Open Sea Disposal
EP/MD/22-118	1 Mar 2022	31 Mar 2022	Valid from 1 Mar 2022 Valid Until 31 Mar 2022	Dumping at Sea Permit (Type 1 – Open Sea Disposal (Dedicated Site) & Type 2 - Confined Marine Disposal)

2. ENVIRONMENTAL STATUS

2.1. Environmental permit (EP) conditions under the EIAO, submission status under the EP and implementation status of mitigation measures had been reviewed and implemented on schedule. The status of required submissions under the EP (EP-457/2013/D) and FEP (FEP-03/457/2013/D) as of the reporting period for the Project are summarised in Table 2.1

Table 2.1 Summarv	of Status of Required	l Submission for	EP-457/2013/D and
	· · · · · · · · · · · · · · · · · · ·		

EP/FEP Condition					
(EP-457/2013/D)	Submission	Submission date			
(FEP-03/457/2013/D)					
Condition 3.4	Monthly EM&A Report (Feb 2022)	14 Mar 2022			

FEP-03/457/2013/D for the Project

2.2. Details of the major construction activities reported by Main Contractor in this reporting period are shown in Table 2.2.

Table 2.2 Summary of the Construction Activities reported by Main Contractor during the

Reporting Month			
Construction activities undertaken	Remarks on progress		
• Construct D-wall panels, pumping test, excavation to roof slab & construct roof slab at Zone B	•50% completion		
• Site formation, predrilling, remedial works for land contamination, grout curtain wall & guide wall & D-wall at Zone B	•95% completion		
• Construction of Stage 3 D-wall panels, soil improvement works, sheet piling at Zone C	•99% completion		
• Predrilling, guide wall, D-wall and pipe piles at Zone D	•90% completion		
• Diversion of DN900 Sewer Pipes (ELS, Excavation and Pipe Laying) along Kansu Street at Zone F/B3	•82% completion		
Predrilling, pipe piles & divert DN450 watermain & DN1800 Drainage at Zone G	•72% completion		
• ELS, Excavation and Construction of Pad Footing, Piers and Portal Frame for RGRF	•90% completion		
Construct bridge deck for 2 spans at Gascoigne Road flyover	•55% completion		
• Construct socketed H piles, pile caps, ground beams and RC columns of Noise Enclosure at Zone D	•40% completion		

2.3. The drawing showing the project layout and the location of the monitoring station and environmental sensitive receivers are attached in Appendix A and Appendix K. Co-ordinates of the monitoring location are shown in Table 2.3.

Monitoring Location	Location ID	Latitude	Longitude
Yau Ma Tei Catholic Primary School (Hoi Wang Road)	W-A1/W-N1A	22.313357	114.16409
Man Cheong Building	W-A6	22.308185	114.166033
Hydan Place	W-N18	22.30858	114.170185
Prosperous Garden Block 1	W-N25A	22.309846	114.168072
The Coronation Tower 1	W-P11	22.309824	114.165616

Table 2.3 Summary for the location of the monitoring station

3. MONITORING RESULTS

3.1. Monitoring Parameters

Air Quality

- 3.1.1. The impact monitoring had been carried out in accordance with section 5.8 of the approved EM&A Manual to determine the 1-hour and 24-hour total suspended particulates (TSP) levels at the monitoring locations in the reporting month.
- 3.1.2. The sampling frequency of at least once in every 6 days, shall be strictly observed at the monitoring stations for 24-hour TSP monitoring. For 1-hour TSP monitoring, the sampling frequency of at least 3 times in every 6 days should be undertaken when the highest dust impact occurs.
- 3.1.3. General meteorological conditions (wind speed, direction and precipitation) and notes regarding any significant adjacent dust producing sources had also been recorded throughout the impact monitoring period.

<u>Noise</u>

- 3.1.4. Construction noise level shall be measured in terms of the A-weighted equivalent continuous sound pressure level (L_{eq}). Leq (30min) shall be used as the monitoring parameter for the time period between 0700 and 1900 hours on normal weekdays.
- 3.1.5. For all other time periods, Leq (5min) shall be employed for comparison with the Noise Control Ordinance (NCO) criteria.
- 3.1.6. As supplementary information for data auditing, statistical results such as L_{10} and L_{90} shall also be obtained for reference.
- 3.2. Monitoring Equipment

Air Quality

- 3.2.1. 1-hour TSP levels and 24-hour TSP had been measured with direct reading dust meter and High Volume Samplers respectively. It has been demonstrated its capability in achieving comparable results with high volume sampling method as set out in the Title 40 of the Code of Federal Regulations, Chapter 1 (Part 50).
- 3.2.2. The 1-hour TSP meter was calibrated by the manufacturer prior to purchasing. Zero response of the instrument was checked before and after each monitoring event. Operation of the 1-hour TSP meter followed manufacturer's Operation and Service Manual. The 24-hour TSP meter was calibrated against firmware 80570-8100-V1.0.4, annually. Operation of the 24-hour TSP meter followed manufacturer's Operation and Service Manual. Valid calibration certificates of dust monitoring equipment are attached in Appendix H.
- 3.2.3. A summary of the equipment that was deployed for the 24- hour averaged monitoring is shown in Table 3.1. The TSP monitoring was conducted as per the schedule presented in Appendix G.

3.2.4. The equipment used for 1-hour TSP and 24-hour TSP measurement and calibration are summarised in Table 3.1

Monitoring Parameter	Monitoring Equipment	Serial Number	Date of Calibration
1 hour TCD	LD-5R Digital Dust Indicator	992821	19 Sep 2021
1-hour TSP	LD-5R Digital Dust Indicator	851819	1 Jul 2021
24-hour TSP	TE-5170X High Volume	1084	22 Feb 2022 and 14
	Sampler		Mar 2022
	TE-5170X High Volume 1		22 Feb 2022 and 14
Sampler			Mar 2022
	TE-5028A Calibration Kit	3702	3 Aug 2021

Table 3.1 Construction Dust Monitoring Equipment

<u>Noise</u>

- 3.2.5. Sound level meter in compliance with the International Electrotechnical Commission Publications 651: 1979 (Type 1) and 804: 1985 (Type 1) specifications has been used for carrying out the noise monitoring. The sound level meter has been checked using an acoustic calibrator. The wind speed and other metrological data has been recorded from Hong Kong Observatory- King's Park meteorological station, along with portable wind speed meter stand by as back up when the information are not available from HKO.
- 3.2.6. Acoustic calibrators and sound level meters using for the monitoring is within the valid period and were calibrated per year. Valid calibration certificate of noise monitoring equipment is attached in Appendix I.
- 3.2.7. The details of equipment using for monitoring are listed in Table 3.2, as below:

Monitoring Equipment	Serial Number	Date of Calibration
Nti XL2 Sound Level Meter	A2A-13661-E0	23 Sep 2021
RION NL-31 Sound Level	00303811	27 Apr 2021
Meter		
Pulsar 105 Acoustic Calibrator	63705	7 Aug 2021

Table 3.2 Monitoring Equipment Used in Monitoring

3.3. Monitoring Methodology and QA/QC results

Air Quality

- 3.3.1. The 1-hour TSP monitor, portable dust meters (Sibata Digital Dust Indicator Model LD-5R) was used for the impact monitoring. The 1-hour TSP meters provides a real time 1hour TSP measurement based on 90° light scattering. Three 1-hour TSP level were logged per every six days.
- 3.3.2. The 24-hour TSP monitor, High Volume Samplers (Tisch TE-5170X High Volume Air Sampler) were used for the impact monitoring. The 24-hour TSP monitoring consists of the following:

- The HVS was set at the monitoring location, with electricity supply connected and secured;
- HVS was calibrated before commencing the 1st measurement;
- The filter paper was weight and provided by HOKLAS lab (Acumen Laboratory and Testing Limited and ALS Technichem (HK) Pty Ltd) before and after the sampling. Certificate of HOKLAS accredited laboratory can be referred to Appendix J;
- The airflow over time during sampling process was recorded by the HVS.
- 3.3.3. HVSs were free-standing with no obstruction. The following criteria were considered in the installation of the HVS:
 - Appropriate support to secure the samples against gusty wind needed to be provided the monitoring station;
 - A minimum of 2m separation from walls, parapets and penthouses was required for rooftop samplers;
 - No furnace or incinerator flues was nearby;
 - Airflow around the sampler was unrestricted; and
 - Permission could be obtained to set up the samplers and gain access to the monitoring station.
- 3.3.4. Preparation of Filter Papers
 - Glass fiber filters were labelled and sufficient filters that were clean and without pinholes were selected;
 - ◆ All filters were equilibrated in the conditioning environment for 24 hours before weighing. The conditioning environment temperature was around 25°C and not varied by more than ±3°C; the relative humidity (RH)was 40%; and
 - Acumen Laboratory and Testing Limited and ALS Technichem (HK) Pty Limited, as HOKLAS accredited laboratory, implemented comprehensive quality assurance and quality control programmes on the filters.

3.3.5. Field Monitoring

- The power supply was checked to ensure that the HVS was working properly;
- The filter holder and area surrounding the filter were cleaned;
- The filter holder was removed by loosening the foul bolts and a new filter, with stamped number upward, on a supporting screen was aligned carefully;
- The filter was properly aligned on the screen so that the gasket formed an airtight seal on the outer edges of the filter;
- The swing bolts were fastened to hold the filter holder down to the frame. The pressure applied should be sufficient to avoid air leakage at the edges;
- The shelter lid was closed and secured with an aluminum strip;
- The HVS was warmed- up for about 5 minutes to establish run- temperature conditions;
- A new flow rate record sheet was inserted into the flow recorder;
- ◆ The flow rates of the HVS was checked and adjusted to between 0.64-1.52m³min⁻¹, which was within the range specified in the EM&A Manual (i.e. 0.6- 1.7m³min⁻¹);

- The programmable timer was set for a sampling period of 24 hours, and the starting time, weather condition and filter number were recorded;
- The initial elapsed time was recorded;
- At the end of sampling, the sampled filter was removed carefully and folded in half so that only surfaces with collected particulate matter were in contact;
- The filter paper was placed in a clean plastic envelope and sealed; all monitoring information was recorded on a standard data sheet and
- The filters were sent to (Acumen Laboratory and Testing Ltd and ALS Technichem (HK) Pty Ltd) for analysis.
- 3.3.6. Maintenance and Calibration
 - The HVS and their accessories were maintained in a good working condition. For example, motor brushes were replaced routinely and electrical wiring was checked to ensure a continuous power supply; and
 - ◆ The flow rate of each HVS with mass flow controller was calibrated using an orifice calibrator, Initial calibrations of the dust monitoring equipment were conducted upon installation and prior to commissioning. Five- point calibration was carried out for HVS using TE-5025 Calibration Kit. HVS is calibrated bimonthly. The calibration records for the HVS is given in Appendix H.
- 3.3.7. Wind Data Monitoring
 - The wind speed has been recorded from Hong Kong Observatory- King's Park meteorological station, along with portable wind speed meter stand by as back up when the information are not available from HKO.

<u>Noise</u>

- 3.3.8. All noise measurements by the meter were set to FAST response and on the A-weighted equivalent continuous sound pressure level (L_{eq}) in decibels dB(A). $L_{Aeq(30min)}$ was used as the monitoring metric for the time period between 0700 –1900 hours on normal weekdays. The measured noise levels were logged every 5 minutes throughout the monitoring period.
- 3.3.9. Prior to the noise measurement, the accuracy of the sound level meter was checked using an acoustic calibrator generating a known sound pressure level at a known frequency. Checking was conducted before and after the monitoring. The calibration level before and after the noise measurement is agreed to within 1.0 dB(A).
- 3.3.10. Noise measurements should not be made in presence of fog, rain, wind with a steady speed exceeding 5 ms⁻¹ or wind with gusts exceeding 10 ms⁻¹. The wind speed was checked with a portable wind speed meter capable of measuring with speeds in ms⁻¹.

3.4. Monitoring Locations

<u>Air Quality</u>

3.4.1. During the site visit, both of the original proposed dust monitoring locations were rejected due to the condition at The Coronation was not favorable for monitoring and the access was declined by the management office of Hong Kong Community College (HKCC) of PolyU. Two alternative air monitoring stations Yau Ma Tei Catholic Primary School (Hoi Wang Road) and Man Cheong Building had been proposed by ET and approved by IEC. 2 designated air monitoring locations were identified and agreed with IEC and EPD. Details of air monitoring stations are described in Table 3.3. The location plan of air quality monitoring stations is shown in Appendix K.

Table 3.3 Location of the Dust Monitoring Stations	5
--	---

Air Quality Monitoring Station	Dust Monitoring Station		
W-A1	Yau Ma Tei Catholic Primary School (Hoi Wang Road)		
W-A6	Man Cheong Building		

<u>Noise</u>

3.4.2. During the site visit, one of the original proposed noise monitoring locations Tak Cheong Building was rejected by the president of the owner's corporation. Alternative noise monitoring station Hydan place had been proposed by ET and approved by IEC. 4 noise sensitive receivers designated noise monitoring locations were identified and agreed with IEC and EPD. The designated monitoring stations are identified and access was granted by the premises. The details of noise monitoring stations are described in Table 3.4 and the location plan of noise monitoring station is shown in Appendix K.

Noise Monitoring Station	Identified Noise Monitoring Station	Type of Measurement
W-N1A	Yau Ma Tei Catholic Primary School (Hoi Wang Road)	Façade
W-N18 Hydan Place		Façade
W-N25A	Prosperous Garden Block 1	Façade
W-P11	The Coronation Tower 1	Façade

 Table 3.4 Noise Monitoring Stations

- 3.5. Monitoring date, time, frequency and duration
- 3.5.1. A summary of impact monitoring duration, sampling parameter and frequency is presented in Table 3.5.

Impact Monitoring	Duration	Sampling Parameter	Frequency	
Dust	1-hour continuous 1-hour TSP measurement		3 times per six days	
Dust	24-hour continuous sampling 24-hour TSP		Once per six days	
Noise	30-minute continuous measurement	$L_{eq\ 30\ min},$ L_{10} and L_{90} as reference.	Once per week (0700 – 1900)	

Table 3.5 Summary of Impact Monitoring Programme

3.6. Result Summary

Air Quality

3.6.1. According to our field observations, the major dust source identified at the designated air quality monitoring stations in the reporting month are summarised in Table 3.6.

Monitoring Station	Major Dust Source		
W-A1	Nearby traffic		
W-A6	Nearby traffic		

- 3.6.2. Air quality impact monitoring for the reporting month was carried out on 3, 9, 15, 21 and 26 March 2022.
- 3.6.3. The results for 1-hour TSP and 24-hour TSP are summarized in Table 3.7 and Table 3.8. The measurement data and details of influencing factors such as weather conditions and site observation are presented in Appendix L.

Monitoring Location	Monitoring Location Range(µg/m ³)		Limit Level(µg/m3)					
W-A1	51-68	319	500					
W-A6	57-73	306 500						
Table 3.8 Summary of 24-hour TSP Monitoring Results								
Monitoring Location Range(µg/m ³) Action Level(µg/m3) Limit Level(µg/m3)								
W-A1	10-100	167	260					
W-A6	62-98	166	260					
Noise								

Table 3.7 Summary of 1-hour TSP Monitoring Results

3.6.4. According to our field observations, the major noise source identified at the designated noise monitoring station in the reporting month are summarised in Table 3.9:

Tuble bis observation al rouse fromtoning Stations				
Monitoring Station	Major Noise Source			
W-N1A	Nearby traffic			
W-N18	Nearby traffic			
W-N25A	Nearby traffic			
W-P11	Nearby traffic			

Table 3.9 Observation at Noise Monitoring Stations

- 3.6.1. The construction noise impact monitoring for the reporting month was carried out on 3, 9, 15, 21 and 26 March 2022.
- 3.6.2. The result for noise monitoring is summarized in Table 3.10. The measurement data are shown in Appendix M.

Time	Monitoring	Parameter	Range, dB(A)				
Period	location		Leq	L10	L90	Action Level	Limit Level#
Normal working hour from 0700-1900	W-N1A	Leq 30min	58.4-60.9	60.8-63.3	54.9-58.3	When one documented complaint is received	70dB(A) or 65 dB(A) during examination
	W-N18		69.1-71.6	72.6-74.3	66.8-69.4		75dB(A)#
	W-N25A		68.9-71.6	72.6-74.9	67.2-69.5		
	W-P11	67.2-68.9	69.1-72.3	64.6-65.5			

Table 3.10 Summary of Noise Monitoring Results

Remarks: 1. # If works are to be carried out during restricted hours, the conditions stipulated in the construction noise permit by the Noise Control Authority have to be followed.

Waste management

3.6.3. The waste generated from this Project includes inert C&D materials, and non-inert C&D materials. Non-inert C&D materials are made up of general refuse, vegetative wastes and recyclable wastes such as plastics and paper/cardboard packaging waste. Steel materials generated from the project are also grouped into non-inert C&D materials as the materials were not disposed of with other inert C&D materials. With reference to relevant handling records and trip tickets of this Project, the quantities of different types of waste generated in the reporting month are summarised in Table 3.11. Details of cumulative waste management data are presented as a waste flow table in Appendix N.

	Quantity					
				Non-inert C&	D Materials	
			Others, e.g.	Recy	ycled material	s
Reporting period	Inert C&D Materials (in 'tonnes)	Chemical Waste (in'000 Kg)	General Refuse disposed	Paper/card board (in '000 Kg)		Metals (in '000 Kg)
Mar-2022	4295.70	0.80	36.80	0.00	0.00	0.00

Table 3.11 Quantities of waste generated from the Project

4. SUMMARY OF COMPLAINTS, NOTIFICATION OF SUMMONS AND PROSECUTIONS

4.1. The Environmental Complaint Handling Procedure is shown in below Table 4.1:

Table 4.1 Environmental Complaint Handling Procedure					
Complaint Received via Project Hotline	Complaint Received via 1823 or from other government departments				
Contractor notify ER, ET and IEC	ER notify Contractor, ET and IEC				
Contractor log complaint and date of receipt onto the complaint database. Contractor, ER and ET to conduct investigation of complaint					
If complaint is considered not valid	If complaint is found valid				
ET or ER to reply the complainant if necessary	Contractor to identify and implement remediation measures in consultation with the IEC, ET and ER.				
	The ER, ET and IEC to review the effectiveness				
	of the Contractor's remedial measures and the				
	updated situation; ET to undertake additional monitoring and audit to verify the situation if				
	necessary, and oversee that circumstances leading				
	to the complaint do not recur. ER to conduct				
	further inspection as necessary.				
	rataler hispection as necessary.				
If the complaint is referred by the FPD the Cor	stractor to prepare interim report on the status of the				
If the complaint is referred by the EPD, the Contractor to prepare interim report on the status of the complaint investigation and follow-up actions stipulated above, including the details of the remedial					
measures and additional monitoring identified or already taken, for submission to EPD within the					
time frame assigned by the EPD					
The ET to record the details of the complaint, results of the investigation, subsequent actions taken to					
address the complaint and updated situation including the effectiveness of the remedial measures,					
supported by regular and additional monitoring results in the monthly EM&A reports					

Table 4.1 Environmental Complaint Handling Procedure

- 4.2. Should non-compliance of the criteria occur, action in accordance with the Event and Action Plan in Appendix D and Appendix E shall be carried out.
- 4.3. Four Action Levels of construction noise were triggered during the reporting period as four documented complaints were received on 1, 15, 23 and 30 March 2022 related to construction noise from works areas at Zone A, B and C. No exceedance of Limit Level of construction noise was recorded in the reporting month. No exceedance of the Action and Limit Levels of 24-hour TSP and 1-hour TSP was recorded during the reporting month.
- 4.4. Four noise related complaints and one non-project related complaint were received on 1, 15, 23 and 30 March 2022. After investigation with Contractor, precautionary measures had been proposed to the Contractor by ET. The interim reports for the complaints are shown in Appendix Q.
- 4.5. No non-compliance was reported in the reporting month.
- 4.6. No notification of summons and prosecution was received in the reporting period.
- 4.7. Statistics on complaints, notifications of summons and successful prosecutions are summarized in Appendix O.

5. EM&A SITE INSPECTION

- 5.1. Site inspections were carried out on a weekly basis to monitor the implementation of proper environmental pollution control and mitigation measures under the Contract. In the reporting period, five (5) site inspections were carried out on 3, 10, 17, 24 and 31 March 2022, along with bi-weekly inspection of the implementation of landscape and visual mitigation measures conducted on 3, 17 and 31 March 2022.
- 5.2. One joint site inspection with IEC also undertaken on 24 March 2022. Minor deficiencies were observed during weekly site inspection. Key observations during the site inspections are summarized in Table 5.1.

Date	Environmental Observations	Follow-up Status				
3 March 2022	1. The cement bags at Zone B2, B1 and A should be covered with impervious sheeting.	1. The cement bags had been covered with impervious sheeting.				
10 March 2022	1. The cement bags at Zone D should be covered with impervious sheeting.	1. The cement bags had been covered with impervious sheeting.				
17 March 2022	1. The cement bags at Zone D should be covered with impervious sheeting.	1. The cement bags had been covered with impervious sheeting.				
24 March 2022	No major observation was found during site inspection.	-				
31 March 2022	No major observation was found during site inspection.	-				

Table 5.1 Site Observations

- 5.3. The Contractor had rectified all observation identified during environmental site inspection in the reporting period.
- 5.4. According to the EIA Study Report, Environmental Permit, contract documents and EM&A Manual, the mitigation measures detailed in the documents are implemented as much as practical during the reporting period. An updated Implementation Status of Environmental Mitigation Measures (EMIS) is provided in Appendix F.

6. **FUTURE KEY ISSUES**


- 6.1. The construction activities provided by Main Contractor in the next reporting month are:
- Excavation / strut & waling works below ceiling slab at Zone A.
- Spray Waterproofing Membrane & Concrete Screeding onto newly constructed roof slab of Zone B. Installation of UU Hanger Support, exposure of box culvert and plugging of abandoned pipe at Zone B.
- Complete pipe piles construction in lieu of D-wall, construction of buttress wall and install RW, OW, PW at Zone B.
- TAM grouting between Zones B2 & C1, install king posts, excavate and construct temporary buttress wall at Zones C1/C2 & C3 and excavation to roof slab and construct part of roof slab at C3.
- Construction of last D-wall, remaining pipe piles, utilities diversion works, buttress wall, installation of king posts and erection of temporary traffic deck at Zone D.
- DN450 FW Gate Valve installation by WSD, backfilling including extract sheet piles and implement TTA at Zone B3.
- Continue for partial demolition works of Cable Tunnel A (jet grouting & pipe piling works) at Zone F.
- Continue for diversion work of DN1800 drainage (stage 1) at Zone G.
- Works for RGRF at HKAA area: Install temporary support & construction of Portal Frame span across Piers P7L and P7R and installation of temporary support for demolition of GRF Portion 1 (existing 3 concrete beams).
- Bridge Works:
 - i. FT1 assembly and bridge deck construction for P4L.
 - ii. FT2 assembly and bridge deck construction for P6L.
 - iii. Complete pier construction and commence pier head construction for P3L.
 - iv. Complete modification of traffic island at east end (above Temple Street).
- Continue socketed H-piling works for middle/east foundation and west side of F02 Noise Enclosure in Zone 3, ELS and construction works for pile caps and ground beams construction for middle/east foundation for Noise Enclosure.
- Continue parapet modification works for Noise Enclosure in Zone 3 on the bridge deck of FSF.
- Works at Zone 2 Noise Enclosure scheduled as the following:
 - i. Column E Permanent socketed H-piling works;
 - ii. Column G Set back road kerbs under TTA 0524 and implement TTA (TTA 0518), trial pit excavation and permanent diversion of uncharted 1200mm dia. drainage pipe;
 - iii. Column C Trial pit excavation & commence temporary socketed H-piling works;
 - iv. Column A Construction of 2 nos. Barrette Wall.
- Noise Enclosure steelworks fabrication at Fabrication Yard in Zhuhai, China.

- Monitoring of instrumentation for all areas.
- 6.2. Potential environmental impacts arising from the above construction activities are mainly associated with dust, construction noise and waste management.
- 6.3. The tentative schedule of regular construction noise monitoring, 1-hour TSP and 24-hour TSP monitoring in the next reporting period is presented in Appendix P.
- 6.4. The construction programme for the Project for the next reporting month is presented in Appendix B.

7. CONCLUSION AND RECOMMENDATIONS

- 7.1. This 48th monthly EM&A Report presents the EM&A works undertaken during the period from 1 March 2022 to 31 March 2022 in accordance with the EM&A Manual and the requirement under EP- 457/2013/D and FEP-03/457/2013/D.
- 7.2. Air quality (including 1-hour TSP and 24-hour TSP) and noise impact monitoring were carried out in the reporting period. No exceedance of the Action Level and Limit Level was recorded for construction noise and air quality impact monitoring during the reporting month.
- 7.3. Weekly environmental site inspections were conducted during the reporting period. Joint site inspection with IEC were carried out on 24 March 2022. Minor deficiency was observed during site inspection and was rectified within the specified deadlines. The environmental performance of the Project was therefore considered satisfactory.
- 7.4. Four Action Levels of construction noise were triggered during the reporting period as four documented complaints were received on 1, 15, 23 and 30 March 2022 related to construction noise from works areas at Zone A, B and C. No exceedance of Limit Level of construction noise was recorded in the reporting month. No exceedance of the Action and Limit Levels of 24-hour TSP and 1-hour TSP was recorded during the reporting month.
- 7.5. Four noise related complaints and one non-project related complaint were received on 1, 15, 23 and 30 March 2022. After investigation with Contractor, precautionary measures had been proposed to the Contractor by ET. The interim reports for the complaints are shown in Appendix Q.
- 7.6. No non-compliance was reported in the reporting month.
- 7.7. No notification of summons or prosecution was received in the reporting month.
- 7.8. The ET will keep track on the construction works to confirm compliance of environmental requirements and the proper implementation of all necessary mitigation measures.

Appendix A Alignment and Works Area For the Contract No. HY/2014/08

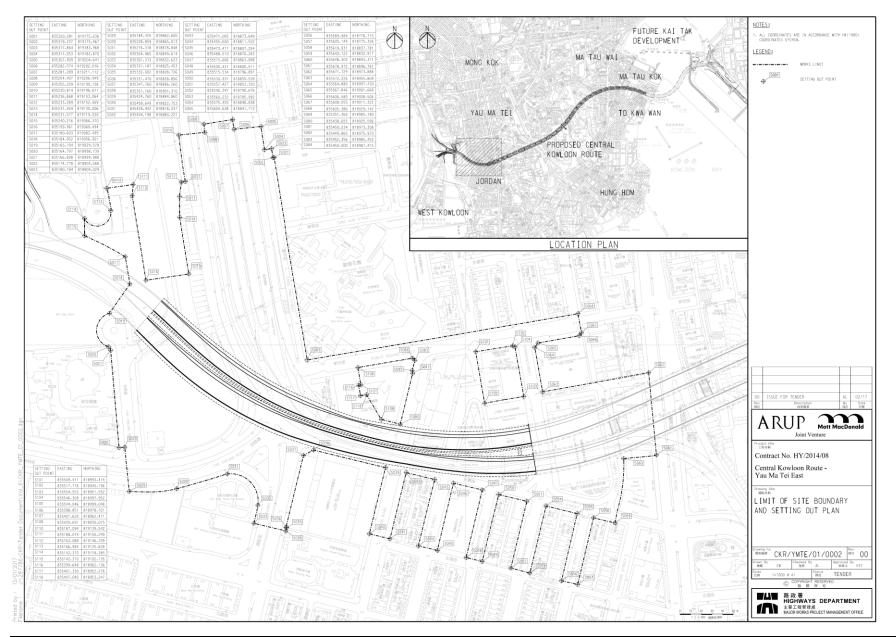


Acuity Sustainability Consulting Ltd.

Appendix B Construction Programme

Construction Programme										
Activity Name	Duratio	on Start	Finish	2022 2023 2024 2025 2026 MAMJJJASONDJFMAMJJJASONDJFMAMJJJASONDJFMAMJJJA						
HY/2014/08 Central Kowloom Route - Yau Ma Tel East	3041	8-Jan-18	6-May-26							
Construction Works	3004	17-Jan-18	8-Apr-26							
Temporary Traffic Management in Underground (Portion 11 & 12)	1725	29-Sep-19	18-Jun-24							
Works on Northern & Southern Paris of YMT Multi-Storey Oar Park Building	629	1-Sep-21	22-May-23							
All Works within TMTSC, Maintenance Depot Area, Public Square St/Ransu St Rest Garden, Access Road	2528	17-Jan-18	18-Dee-24							
Preservation and Protection of Dristing Trees	2510	17-Jan-18	30-Nov-24							
Establishment Works	365	9-Apr-25	8-Apr-26							
All Works in Underground	1147	14-Feb-22	5-Apr-25							
Completion of Noise Enclosure	1578	26-Aug-20	20-Dec-24							
All Renaining Works not Covered in Other Section	2499	6-Jun-18	8-Apr-25							
Construction of C&C Tunnel Bastbound	2341	17-Jan-18	14-Jun-24							
Construction of CSC Tunnel Westbound	2600	17-Jan-18	28-Reb-25							
C&C Tunnel Works within Portion 13 & 20A, Cal-de-rate at Pontion 20B & 24	1729	7-Apr-18	30-Dec-22							
Damailition of Southern Part of Bs. YMT Multi-Stoney Car Park Building	132	15-Nov-22	26-Mar-23							
GRF Reprovisioning	1717	16-Dec-19	27-Aug-24							
Completion of Diaphraym Walls and Roof Slabs of C&C Timmels within Portion 27 and 28	1	1-Sep-22	1-Sep-22							

Appendix C Project Organization Chart

Project O-Chart

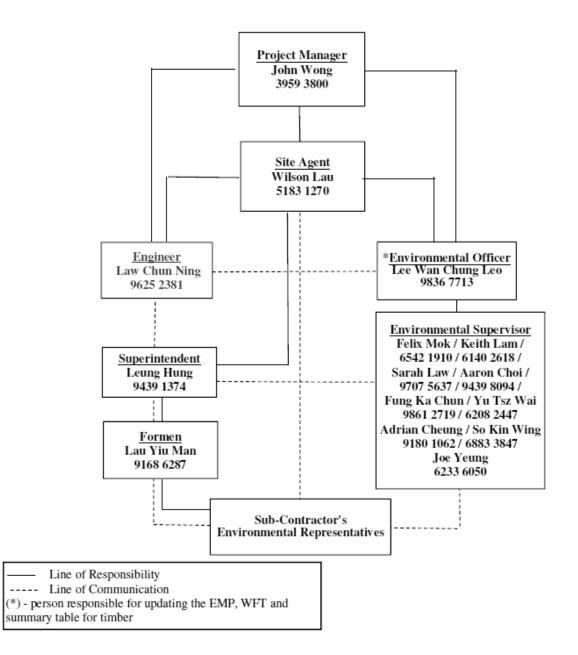

Appendix D Dust Event-Action Plan (EAP)

Contract No. HY/2014/08 Environmental Monitoring & Auditing

	ACTION								
EVENT	ET	IEC	ER	CONTRACTOR					
ACTION LEV	ACTION LEVEL								
1.Exceedance for one sample	 Identify source, investigate the causes of exceedance and propose remedial measures; Inform IEC and ER; Repeat measurement to confirm finding; Increase monitoring frequency to daily. 	 Check monitoring data submitted by ET; Check Contractor's working method. 	1. Notify Contractor.	 Rectify any unacceptable practice; Amend working methods if appropriate. 					
2.Exceedance for two or more consecutive samples	 Identify source; Inform IEC and ER; Advise the ER on the effectiveness of the proposed remedial measures; Repeat measurements to confirm findings; Increase monitoring frequency to daily; Discuss with IEC and Contractor on remedial actions required; If exceedance continues, arrange meeting with IEC and ER; If exceedance stops, cease additional monitoring. 	 Check monitoring data submitted by ET; Check Contractor's working method; Discuss with ET and Contractor on possible remedial measures; Advise the ET on the effectiveness of the proposed remedial measures; Supervise Implementation of remedial measures. 	 Confirm receipt of notification of failure in writing; Notify Contractor; Ensure remedial measures properly implemented. 	 Submit proposals for remedial to ER within 3 working days of notification; Implement the agreed proposals; Amend proposal if appropriate. 					
LIMIT LEVEL	·		•	•					
1.Exceedance for one sample	 Identify source, investigate the causes of exceedance and propose remedial measures; Inform ER, Contractor and 	 Check monitoring data submitted by ET; Check Contractor's working method; 	 Confirm receipt of notification of failure in writing; Notify Contractor; 	 Take immediate action to avoid further exceedance; Submit proposals for remedial actions to IEC 					

EVENT	ACTION			
EVENI	ET	IEC	ER	CONTRACTOR
	 EPD; 3. Repeat measurement to confirm finding; 4. Increase monitoring frequency to daily; 5. Assess effectiveness of Contractor's remedial actions and keep IEC, EPD and ER informed of the results. 	 Discuss with ET and Contractor on possible remedial measures; Advise the ER on the effectiveness of the proposed remedial measures; Supervise implementation of remedial measures. 	3. Ensure remedial measures properly implemented.	 within 3 working days of notification; Implement the agreed proposals; 4. Amend proposal if appropriate.
2.Exceedance for two or more consecutive samples	 Notify IEC, ER, Contractor and EPD; Identify source; Repeat measurement to confirm findings; Increase monitoring frequency to daily; Carry out analysis of Contractor's working procedures to determine possible mitigation to be implemented; Arrange meeting with IEC and ER to discuss the remedial actions to be taken; Assess effectiveness of Contractor's remedial actions and keep IEC, EPD and ER informed of the results; If exceedance stops, cease additional monitoring. 	 Discuss amongst ER, ET, and Contractor on the potential remedial actions; Review Contractor's remedial actions whenever necessary to assure their effectiveness and advise the ER accordingly; Supervise the implementation of remedial measures. 	 Confirm receipt of notification of failure in writing; Notify Contractor; In consultation with the IEC, agree with the Contractor on the remedial measures to be implemented; Ensure remedial measures properly implemented; If exceedance continues, consider what portion of the work is responsible and instruct the Contractor to stop that portion of work until the exceedance is abated. 	 Take immediate action to avoid further exceedance; Submit proposals for remedial actions to IEC within 3 working days of notification; Implement the agreed proposals; Resubmit proposals if problem still not under control; Stop the relevant portion of works as determined by the ER until the exceedance is abated.

Note:

ET – Environmental Team

ER – Engineer's Representative

IEC – Independent Environmental Checker

Acuity Sustainability Consulting Ltd.

Appendix E Noise Event-Action Plan (EAP)

EVENT		ACTIO	DN	
	ЕТ	IEC	ER	CONTRACTOR
Action Level	 Identify source, investigate the causes of exceedance and propose remedial measures; Notify IEC and Contractor; Report the results of investigation to the IEC, ER and Contractor; Discuss with the Contractor and formulate remedial measures; Increase monitoring frequency to check mitigation effectiveness. 	 Review the analysed results submitted by the ET; Review the proposed remedial measures by the Contractor and advise the ER accordingly; Supervise the implementation of remedial measures. 	 Confirm receipt of notification of failure in writing; Notify Contractor; Require Contractor to propose remedial measures for the analysed noise problem; Ensure remedial measures are properly implemented 	 Submit noise mitigation proposals to IEC; Implement noise mitigation proposals.
Limit Level	 Identify source; Inform IEC, ER, EPD and Contractor; Repeat measurements to confirm findings; Increase monitoring frequency; Carry out analysis of Contractor's working procedures to determine possible mitigation to be implemented; Inform IEC, ER and EPD the causes and actions taken for the exceedances; Assess effectiveness of Contractor's remedial actions 	 Discuss amongst ER, ET, and Contractor on the potential remedial actions; Review Contractors remedial actions whenever necessary to assure their effectiveness and advise the ER accordingly; Supervise the implementation of remedial measures. 	 Confirm receipt of notification of failure in writing; Notify Contractor; Require Contractor to propose remedial measures for the analysed noise problem; Ensure remedial measures properly implemented; If exceedance continues, consider what portion of the work is responsible and instruct the Contractor to stop that portion of work until the exceedance is 	 Take immediate action to avoid further exceedance; Submit proposals for remedial actions to IEC within 3 working days of notification; Implement the agreed proposals; Resubmit proposals if problem still not under control; Stop the relevant portion of works as determined by the ER until the exceedance is abated.

EVENT	ACTION							
	ET	IEC	ER	CONTRACTOR				
	and keep IEC, EPD and ER informed of the results;		abated.					
	8. If exceedance stops, cease additional monitoring.							

Note:

ET – Environmental Team

IEC – Independent Environmental Checker

ER – Engineer's Representative

Appendix F Environmental Mitigation Implementation Schedule (EMIS)

EIA Ref.	EM&A Log Ref.	Recommended Mitigation Measures	Objectives of the Recommende d Measures & Main Concerns to address	Implementation Agent	Location / Timing	Implementation Stage	Requirements and/ or standards to be achieved	Implementation Status
			Constru	ction Dust Impact				
S4.3.10	D1	The contractor shall follow the procedures and requirements given in the Air Pollution Control (Construction Dust) Regulation	Minimize dust impact at the nearby sensitive receivers	Contractor	All construction sites	Construction stage	 APCO To control the dust impact To meet HKAQO and TM-EIA criteria 	Implemented
\$4.3.10	D2	 Mitigation measures in form of regular watering under a good site practice should be adopted. Watering once per hour on exposed worksites and haul road should be conducted to achieve dust removal efficiencies of 91.7%. While the above watering frequencies are to be followed, the extent of watering may vary depending on actual site conditions but should be sufficient to maintain an equivalent intensity of no less than 1.3 L/m² to achieve the dust removal efficiency. 	Minimize dust impact at the nearby sensitive receivers	Contractor	All construction sites	Construction stage	 APCO To control the dust impact To meet HKAQO and TM-EIA criteria 	• Implemented
\$4.3.10	D3	 Proper watering at exposed spoil should be undertaken throughout the construction phase; Any excavated or stockpile of dusty material should be covered entirely by impervious sheeting or sprayed with water to maintain the entire surface wet and then removed or backfilled or reinstated where practicable within 24 hours of the excavation or unloading; Any dusty materials remaining after a stockpile is removed should be wetted with water and cleared from the surface of roads; A stockpile of dusty material should not be 	Minimize dust impact at the nearby sensitive receivers	Contractor	All construction sites	Construction stage	 APCO To control the dust impact To meet HKAQO and TM-EIA criteria 	 Implemented, deficiency rectified after observation.

EIA Ref.	EM&A Log Ref.	Recommended Mitigation Measures	Objectives of the Recommende d Measures & Main Concerns to address	Implementation Agent	Location / Timing	Implementation Stage	Requirements and/ or standards to be achieved	Implementation Status
		 extended beyond the pedestrian barriers, fencing or traffic cones; The load of dusty materials on a vehicle leaving a construction site should be covered entirely by impervious sheeting to ensure that the dusty materials do not leak from the vehicle. Where practicable, vehicle washing facilities with high pressure water jet should be provided at every discernible or designated vehicle exit point. The area where vehicle washing takes place and the road section between the washing facilities and the exit point should be paved with concrete, bituminous materials or hardcores; When there are open excavation and reinstatement works, hoarding of not less than 2.4m high should be provided and properly maintained as far as practicable along the site boundary with provision for public crossing. Good site practice shall also be adopted by the Contractor to ensure the conditions of the hoardings are properly maintained throughout the construction period; The portion of any road leading only to construction site that is within 30m of a vehicle entrance or exit should be kept clear of dusty materials; Surfaces where any pneumatic or power-driven drilling, cutting, polishing or other mechanical breaking operation takes place should be sprayed with water or a dust suppression chemical 						

EIA Ref.	EM&A Log Ref.	Recommended Mitigation Measures	Objectives of the Recommende d Measures & Main Concerns to address	Implementation Agent	Location / Timing	Implementation Stage	Requirements and/ or standards to be achieved	Implementation Status
S4.3.10	D6	 continuously; Any area that involves demolition activities should be sprayed with water or a dust suppression chemical immediately prior to, during and immediately after the activities so as to maintain the entire surface wet; Any skip hoist for material transport should be totally enclosed by impervious sheeting; Every stock of more than 20 bags of cement or dry-pulverised fuel ash (PFA) should be covered entirely by impervious sheeting or placed in an area sheltered on the top and the 3 sides; Loading, unloading, transfer, handling or storage of bulk cement or dry PFA should be carried out in a totally enclosed system or facility, and any vent or exhaust should be fitted with an effective fabric filter or equivalent air pollution control system Exposed earth should be properly treated by compaction, turfing, hydroseeding, vegetation planting or sealing with latex, vinyl, bitumen, shotcrete or other suitable surface stabilizer within six months after the last construction activity on the construction site or part of the construction site where the exposed earth lies. Implement regular dust monitoring under EM&A programme during the construction stage. 	Monitoring of dust impact	Contractor	Selected rep. dust monitoring	Construction stage	• TM-EIA	• Implemented
			Construc	l tion Noise (Airborn	station e)	1		

EIA Ref.	EM&A Log Ref.	Recommended Mitigation Measures	Objectives of the Recommende d Measures & Main Concerns to address	Implementation Agent	Location / Timing	Implementation Stage	Requirements and/ or standards to be achieved	Implementation Status
S5.4.1	N1	 Implement the following good site practices: Only well-maintained plant should be operated onsite and plant should be serviced regularly during the construction programme; Machines and plant (such as trucks, cranes) that may be in intermittent use should be shut down between work periods or should be throttled down to a minimum; Plant known to emit noise strongly in one direction, where possible, be orientated so that the noise is directed away from nearby NSRs; Silencers or mufflers on construction equipment should be properly fitted and maintained during the construction works; Mobile plant should be sited as far away from NSRs as possible and practicable; Material stockpiles, mobile container site office and other structures should be effectively utilized, where practicable, to screen noise from on-site construction activities. 	Control construction airborne noise	Contractor	All construction sites	Construction stage	• Annex 5, TM- EIAO	• Implemented
S5.4.1	N2	Install temporary hoarding located on the site boundaries between noisy construction activities and NSRs. The conditions of hoardings shall be properly maintained throughout the construction period.	Reduce the construction noise levels at low-level zone of NSRs through partial screening	Contractor	All construction sites	Construction stage	• Annex 5, TM- EIAO	Implemented
S5.4.1	N3	Install movable noise barriers (typical design is wooden framed barrier with a small-cantilevered on a skid footing with 25mm thick internal sound absorptive lining), acoustic mat or full enclosure,	Sreen the noisy plant items to be used at all	Contractor	All construction sites where practicable	Construction stage	• Annex 5, TM- EIAO	Implemented

EIA Ref.	EM&A Log Ref.	Recommended Mitigation Measures	Objectives of the Recommende d Measures & Main Concerns to address	Implementation Agent	Location / Timing	Implementation Stage	Requirements and/ or standards to be achieved	Implementation Status
		screen the noisy plants including air compressors, generators and handheld breakers, etc.	sites					
S5.4.1	N4	Use 'Quiet plant'	Reduce the noise levels of plant items	Contractor	All construction sites where practicable	Construction stage	• Annex 5, TM- EIAO	Implemented
\$5.4.1	N5	Loading/ unloading activities should be carried out inside the full enclosure of mucking out points.	Reduce the noise levels of loading/ unloading activities	Contractor	Mucking out locations	Construction stage	• Annex 5, TM- EIAO	Implemented
S5.4.1	N6	Sequencing operation of construction plants where practicable.	Operate sequentially within the same work site to reduce the construction airborne noise	Contractor	All construction sites where practicable	Construction stage	• Annex 5, TM- EIAO	Implemented
S5.4.1	N7	Implement a noise monitoring programme under EM&A programme.	Monitor the construction noise levels at the selected representative locations	Contractor	Selected rep. noise monitoring station	Construction stage	• TM-EIAO	Implemented

EIA Ref.	EM&A Log Ref.	Recommended Mitigation Measures	Objectives of the Recommende d Measures & Main Concerns to address	Implementation Agent	Location / Timing	Implementation Stage	Requirements and/ or standards to be achieved	Implementation Status
S6.9.1.1	W1	 In accordance with the Practice Note for Professional Persons on Construction Site Drainage, Environmental Protection Department, 1994 (ProPECC PN1/94), construction phase mitigation measures shall include the following: Construction Runoff At the start of site establishment, perimeter cut-off drains to direct off-site water around the site should be constructed with internal drainage works and erosion and sedimentation control facilities implemented. Channels (both temporary and permanent drainage pipes and culverts), earth bunds or sand bag barriers should be provided on site to direct stormwater to silt removal facilities. The design of the temporary on-site drainage system will be undertaken by the contractor prior to the commencement of construction; The dikes or embankments for flood protection should be implemented around the boundaries of earthwork areas. Temporary ditches should be provided to facilitate the runoff discharge into an appropriate watercourse, through a silt/ sediment trap. The sediment/ silt traps should be incorporated in the permanent drainage channels to enhance deposition rates; The design of efficient silt removal facilities should be based on the guidelines in Appendix A1 of ProPECC PN 1/94, which states that the retention time for silt/ sand traps should be 5 minutes under 	To minimize water quality impact from the construction site runoff and general construction activities	Contractor	All construction sites where practicable	Construction stage	 Water Pollution Control Ordinance ProPECC PN 1/94 TM-EIAO TM-DSS 	• Implemented

EIA Ref.	EM&A Log Ref.	Recommended Mitigation Measures	Objectives of the Recommende d Measures & Main Concerns to address	Implementation Agent	Location / Timing	Implementation Stage	Requirements and/ or standards to be achieved	Implementation Status
		 maximum flow conditions. Sizes may vary depending upon the flow rate, but for a flow rate of 0.1 m3/s a sedimentation basin of 30 m3 would be required and for a flow rate of 0.5 m3/s the basin would be 150 m3. The detailed design of the sand/ silt traps shall be undertaken by the contractor prior to the commencement of construction; All exposed earth areas should be completed and vegetated as soon as possible after earthworks have been completed, or alternatively, within 14 days of the cessation of earthworks where practicable. Exposed slope surfaces should be covered by tarpaulin or other means; The overall slope of the site should be kept to a minimum to reduce the erosive potential of surface water flows, and all traffic areas and access roads protected by coarse stone ballast. An additional advantage accruing from the use of crushed stone is the positive traction gained during prolonged periods of inclement weather and the reduction of surface sheet flows; All drainage facilities and erosion and sediment control structures should be regularly inspected and maintained to ensure proper and efficient operation at all times and particularly following rainstorms. Deposited silt and grit should be removed regularly and disposed of by spreading evenly over stable, vegetated areas; Measures should be taken to minimize the ingress of site drainage into excavations. If the excavation 						

EIA Ref.	EM&A Log Ref.	Recommended Mitigation Measures	Objectives of the Recommende d Measures & Main Concerns to address	Implementation Agent	Location / Timing	Implementation Stage	Requirements and/ or standards to be achieved	Implementation Status
		 of trenches in wet periods is necessary, they should be dug and backfilled in short sections wherever practicable. Water pumped out from trenches or foundation excavations should be discharged into storm drains via silt removal facilities; Open stockpiles of construction materials (for example, aggregates, sand and fill material) of more than 50m3 should be covered with tarpaulin or similar fabric during rainstorms. Measures should be taken to prevent the washing away of construction materials, soil, silt or debris into any drainage system; Manholes should always be adequately covered and temporarily sealed so as to prevent silt, construction materials or debris being washed into the drainage system and storm runoff being directed into foul sewers; Precautions be taken at any time of year when rainstorms are likely, actions to be taken when a rainstorm is imminent or forecasted, and actions to be taken during or after rainstorms are summarized in Appendix A2 of ProPECC PN 1/94. Particular attention should be paid to the control of silty surface runoff during storm events, especially for areas located near steep slopes; All vehicles and plant should be cleaned before leaving a construction site to ensure no earth, mud, debris and the like is deposited by them on roads. An adequately designed and site wheel washing facilities should be provided at every construction 						

EIA Ref.	EM&A Log Ref.	Recommended Mitigation Measures	Objectives of the Recommende d Measures & Main Concerns to address	Implementation Agent	Location / Timing	Implementation Stage	Requirements and/ or standards to be achieved	Implementation Status
		 site exit where practicable. Wash-water should have sand and silt settled out and removed at least on a weekly basis to ensure the continued efficiency of the process. The section of access road leading to, and exiting from, the wheel wash bay to the public road should be paved with sufficient backfall toward the wheel wash bay to prevent vehicle tracking of soil and silty water to public roads and drains; Oil interceptors should be provided in the drainage system downstream of any oil/ fuel pollution sources. The oil interceptors should be emptied and cleaned regularly to prevent the release of oil and grease into the storm water drainage system after accidental spillage. A bypass should be provided for the oil interceptors to prevent flushing during heavy rain; Construction solid waste, debris and rubbish on site should be collected, handled and disposed of properly to avoid water quality impacts; All fuel tanks and storage areas should be provided with locks and sited on sealed areas, within bunds of a capacity equal to 110% of the storage capacity of the largest tank to prevent spilled fuel oils from reaching water sensitive receivers nearby; Adopt best management practices; All earth works should be conducted sequentially to limit the amount of construction runoff generated from exposed areas during the wet season (April to September) as far as practicable. 						

EIA Ref.	EM&A Log Ref.	Recommended Mitigation Measures	Objectives of the Recommende d Measures & Main Concerns to address	Implementation Agent	Location / Timing	Implementation Stage	Requirements and/ or standards to be achieved	Implementation Status
S6.9.1.2	W2	 Tunneling Works and Underground Works Cut-&-cover tunneling work should be conducted sequentially to limit the amount of construction runoff generated from exposed areas during the wet season (April to September) as far as practicable. Uncontaminated discharge should pass through sedimentation tanks prior to off-site discharge; The wastewater with a high concentration of SS should be treated (e.g. by sedimentation tanks with sufficient retention time) before discharge. Oil interceptors would also be required to remove the oil, lubricants and grease from the wastewater; Direct discharge of the bentonite slurry (as a result of D-wall) is not allowed. It should be reconditioned and reused wherever practicable. Temporary storage locations (typically a properly closed warehouse) should be provided on site for any unused bentonite that needs to be transported away after all the related construction activities area completed. The requirements in ProPECC PN 1/94 should be adhered to in the handling and disposal of bentonite slurries. 	To minimize construction water quality impact from tunneling works	Contractor	All tunneling portion	Construction stage	 Water Pollution Control Ordinance ProPECC PN 1/94 TM-DSS TM-EIAO 	• Implemented
\$6.9.1.3	W3	 Sewage Effluent Portable chemical toilets and sewage holding tanks are recommended for handling the construction sewage generated by the workforce. A licensed contractor should be employed to provide 	To minimize water quality from sewage effluent	Contractor	All construction sites where practicable	Construction stage	 Water Pollution Control Ordinance TM-DSS 	Implemented

EIA Ref.	EM&A Log Ref.	Recommended Mitigation Measures	Objectives of the Recommende d Measures & Main Concerns to address	Implementation Agent	Location / Timing	Implementation Stage	Requirements and/ or standards to be achieved	Implementation Status
		appropriate and adequate portable toilets and be responsible for appropriate disposal and maintenance.						
\$6.9.1.5	W4	 Groundwater from Potential Contaminated Area: No direct discharge of groundwater from contaminated areas should be adopted. A discharge license under the WPCO through the Regional Office of EPD for groundwater discharge should be applied. Prior to the excavation works within these potentially contaminated areas, the groundwater quality should be reviewed during the process of discharge license application. The compliance to the Technical Memorandum on Standards for Effluents Discharged into Drainage on Sewerage Systems, Inland and Coastal Waters (TM-DSS) and the existence of prohibited substance should be confirmed. If the review results indicated that the groundwater to be generated from the excavation works would be contaminated, the contaminated groundwater should be either properly treated in compliance with the requirements of the TM-DSS or properly recharged into the ground. If wastewater treatment is deployed, the wastewater treatment unit shall deploy suitable treatment process (e.g. oil interceptor / activated carbon) to reduce the pollution level to an 	To minimize groundwater quality impact from contaminated area	Contractor	Excavation areas where contamination is found	Construction stage	 Water Pollution Control Ordinance TM-DSS TM-EIAO 	• Implemented

EIA Ref.	EM&A Log Ref.	Recommended Mitigation Measures	Objectives of the Recommende d Measures & Main Concerns to address	Implementation Agent	Location / Timing	Implementation Stage	Requirements and/ or standards to be achieved	Implementation Status
		 acceptable standard and remove any prohibited substances (e.g. TPH) to undetectable range. All treated effluent from wastewater treatment plant shall meet the requirements as stated in TM-DSS and should be discharged into the foul sewers. If groundwater recharging wells are deployed, recharging wells should be installed as appropriate for recharging the contaminated groundwater back into the ground. The recharging wells should be selected at places where the groundwater quality will not be affected by the recharge operation as indicated in the Section 2.3 of TM-DSS. The baseline groundwater quality shall be determined prior to the selection of the recharge wells, and submit a working plan (including the laboratory analytical results showing the quality of groundwater to be recharged shall not be higher than pollutant levels of ambient groundwater at the recharge well. Prior to recharge, any prohibited substances such as TPH products should be removed as necessary by installing the petrol interceptor. 						
\$6.9.1.6	W6	Accidental Spillage In order to prevent accidental spillage of chemicals, the following is recommended:	To minimize water quality impact from accidental	Contractor	All construction site where practicable	Construction stage	Water Pollution Control Ordinance	Implemented

EIA Ref.	EM&A Log Ref.	Recommended Mitigation Measures	Objectives of the Recommende d Measures & Main Concerns to address	Implementation Agent	Location / Timing	Implementation Stage	Requirements and/ or standards to be achieved	Implementation Status
		 All the tanks, containers, storage area should be bunded and the locations should be locked as far as possible from the sensitive watercourse and stormwater drains; The Contractor should register as a chemical waste producer if chemical wastes would be generated. Storage of chemical waste arising from the construction activities should be stored with suitable labels and warnings. Disposal of chemical wastes should be conducted in compliance with the requirements as stated in the Waste Disposal (Chemical Waste) (General) Regulation. 	spillage				 ProPECC PN 1/94 TM-EIAO TM-DSS 	
			Waste Manage	ement (Construction	Waste)			
\$7.4.1	WM1	 On-site sorting of C&D material Geological assessment should be carried out by competent persons on site during excavation to identify materials which are not suitable to use as aggregate in structural concrete (e.g. volcanic rock, Aplite dyke rock, etc.). Volcanic rock and Aplite dyke rock should be separated at the source sites as far as practicable and stored at designated stockpile area preventing them from delivering to crushing facilities. The crushing plant operator should also be reminded to set up measures to prevent unsuitable rock from ending up at concrete 	Separation of unsuitable rock from ending up at concrete batching plants and be turned into concrete for structural use	Contractor	All construction sites	Construction stage	• DEVB (W) No. 6/2010	• Implemented

EIA Ref.	EM&A Log Ref.	Recommended Mitigation Measures	Objectives of the Recommende d Measures & Main Concerns to address	Implementation Agent	Location / Timing	Implementation Stage	Requirements and/ or standards to be achieved	Implementation Status
		batching plants and be turned into concrete for structural use. Details regarding control measures at source site and crushing facilities should be submitted by the Contractor for the Engineer to review and agree. In addition, site records should also be kept for the types of rock materials excavated and the traceability of delivery will be ensured with the implementation of Trip Ticket System and enforced by site supervisory staff as stipulated under DEVB TC(W) No. 6/2010 for tracking of the correct delivery to the rock crushing facilities for processing into aggregates. Alternative disposal option for the reuse of volcanic rock and Aplite Dyke rock, etc. should be explored.						
\$7.5.1	WM2	 <u>Construction and Demolition Material</u> Maintain temporary stockpiles and reuse excavated fill material for backfilling and reinstatement; Carry out on-site sorting; Make provisions in the Contract documents to allow and promote the use of recycled aggregates where appropriate; Adopt 'selective demolition' technique to demolish the existing structures and facilities with a view to recovering broken concrete effectively for recycling purpose, where possible; Implement a trip-ticket system for each works contract to ensure that the disposal of C&D materials are properly documented and verified; and 	Good site practice to minimize the waste generation and recycle the C&D materials as far as practicable so as to reduce the amount for final disposal	Contractor	All construction sites	Construction stage	 Land (Miscellaneo us Provisions) Ordinance Waste Disposal Ordinance ETWB TCW No. 19/2005 	• Implemented

EIA Ref.	EM&A Log Ref.	Recommended Mitigation Measures	Objectives of the Recommende d Measures & Main Concerns to address	Implementation Agent	Location / Timing	Implementation Stage	Requirements and/ or standards to be achieved	Implementation Status
		 Implement an enhanced Waste Management Plan similar to ETWBTC (Works) No. 19/2005 – "Environmental Management on Construction Sites" to encourage on-site sorting of C&D materials and to minimize their generation during the course of construction. 						
\$7.5.1	WM3	 <u>C&D Waste</u> Standard formwork or pre-fabrication should be used as far as practicable in order to minimize the arising of C&D materials. The use of more durable formwork or plastic facing for the construction works should be considered. Use of wooden hoardings should not be used, as in other projects. Metal hoarding should be used to enhance the possibility of recycling. The purchasing of construction materials will be carefully planned in order to avoid over ordering and wastage; The Contractor should recycle as much of the C&D materials as possible on-site. Public fill and C&D waste should be segregated and stored in different containers or skips to enhance reuse or recycling of materials and their proper disposal. Where practicable, concrete and masonry can be crushed and used as fill. Steel reinforcement bar can be used by scrap steel mills. Different areas of the sites should be considered for such segregation and storage. 	Good site practice to minimize the waste generation and recycle the C&D materials as far as practicable so as to reduce the amount for final disposal	Contractor	All construction sites	Construction stage	 Land (Miscellaneo us Provisions) Ordinance Waste Disposal Ordinance ETWB TCW No. 19/2005 	• Implemented

EIA Ref.	EM&A Log Ref.	Recommended Mitigation Measures	Objectives of the Recommende d Measures & Main Concerns to address	Implementation Agent	Location / Timing	Implementation Stage	Requirements and/ or standards to be achieved	Implementation Status
\$7.5.1	WM5	 Land-based Sediment All construction plant and equipment shall be designed and maintained to minimize the risk of silt, sediments, contaminants or other pollutants being released into the water column or deposited in the locations other than designated location; All vessels shall be sized such that adequate draft is maintained between vessels and the sea bed at all states of the tide to ensure that undue turbidity is not generated by turbulence from vessel movement or propeller wash; Before moving the vessels which are used for transporting dredged material, excess material shall be cleaned from the decks and exposed fittings of vessels and the excest materials shall never be dumped into the sea except at the approved locations; Adequate freeboard shall be maintained on barges to ensure that decks are not washed by wave action. The Contractors shall monitor all vessels transporting material to ensure that no dumping outside the approved location takes place. The Contractor shall keep and produce logs and other records to demonstrate compliance and that journeys are consistent with designated locations and copies of such records shall be submitted to the engineers; The Contractors shall comply with the conditions in the dumping licence. 	To control pollution due to marine sediment	Contractor	Along CKR alignment	Construction stage	• ETWB TCW No. 34/2002	• Implemented

EIA Ref.	EM&A Log Ref.	Recommended Mitigation Measures	Objectives of the Recommende d Measures & Main Concerns to address	Implementation Agent	Location / Timing	Implementation Stage	Requirements and/ or standards to be achieved	Implementation Status
		 All bottom dumping vessels (Hopper barges) shall be fitted with tight fittings seals to their bottom openings to prevent leakage of material; The material shall be placed into the disposal pit by bottom dumping; Contaminated marine mud shall be transported by spit barge of not less than 750m3 capacity and capable of rapid opening and discharge at the disposal site; Discharge shall be undertaken rapidly and the hoppers shall be closed immediately. Material adhering to the sides of the hopper shall not be washed out of the hopper and the hopper shall remain closed until the barge returns to the disposal site. For Type 3 special disposal treatment, sealing of contaminant with geosynthetic containment before dropping designated mud pit would be a possible arrangement. A geosynthetic containment method is a method whereby the sediments are sealed in geosynthetic containers and, the containers would be dropped into the designated contaminated mud pit where they would be covered by further mud disposal and later by the mud pit capping at the disposal site, thereby fulfilling the requirements for fully confined mud disposal. 						
S7.5.1	WM6	 <u>Chemical Waste</u> Chemical waste that is produced, as defined by Schedule 1 of the Waste Disposal (Chemical Waste) (General) Regulation, should be handled in 	Control the chemical waste and ensure proper storage,	Contractor	All construction sites	Construction stage	 Waste Disposal (Chemical Waste) 	Implemented

EIA Ref.	EM&A Log Ref.	Recommended Mitigation Measures	Objectives of the Recommende d Measures & Main Concerns to address	Implementation Agent	Location / Timing	Implementation Stage	Requirements and/ or standards to be achieved	Implementation Status
		 accordance with the Code of Practice on the Packaging, Labelling and Storage of Chemical Wastes; Containers used for the storage of chemical wastes should be suitable for the substance they are holding, resistant to corrosion, maintained in a good condition, and securely closed, have a capacity of less than 450 L unless the specification has been approved by EPD, and display a label in English and Chinese in accordance with instructions prescribed in Schedule 2 of the regulation; The storage area for chemical wastes should be clearly labelled and used solely for the storage of chemical waste, enclosed on at least 3 sides, have an impermeable floor and bunding of sufficient capacity to accommodate 110% of the volume of the largest container or 20% of the total volume of waste stored in that area, whichever is the greatest, have adequate ventilation, covered to prevent rainfall entering, and arranged so that incompatible materials are adequately separated; Disposal of chemical waste should be via a licensed waste collector, be to a facility licensed to receive chemical waste, such as the Chemical Waste Treatment Centre which also offers a chemical waste collection service and can supply the necessary storage containers, or be to a reuser of the waste, under approval from EPD. 	handling and disposal				(General) Regulation • Code of Practice on the Packaging, Labelling and Storage of Chemical Waste	

EIA Ref.	EM&A Log Ref.	Recommended Mitigation Measures	Objectives of the Recommende d Measures & Main Concerns to address	Implementation Agent	Location / Timing	Implementation Stage	Requirements and/ or standards to be achieved	Implementation Status
\$7.5.1	WM7	 General Refuse General refuse generated on-site should be stored in enclosed bins or compaction units separately from construction and chemical wastes; A reputable waste collector should be employed by the Contractor to remove general refuse from the site, separately from construction and chemical wastes, on a daily basis to minimize odour, pest and litter impacts. Burning of refuse on construction sites is prohibited by law. Aluminum cans are often recovered from the waste stream by individual collectors if they are segregated and made easily accessible. Separate labelled bins for their deposit should be provided if feasible; Office wastes can be reduced through the recycling of paper if volumes are large enough to warrant collection. Participation in a local collection scheme should be considered by the Contractor. 	Minimize production of the general refuse and avoid odour, pest and litter impacts	Contractor	All construction sites	Construction stage	Waste Disposal Ordinance	• Implemented
			Land Contamin	ation	I	1		
S8.9 & Appendix 8.4	 LC2 Excavation of the Contaminated Soil Prior to commencement of the excavation works at the contamination zone, the zone should be clearly marked out on site and the surface levels recorded. Excavation of contaminated material should be undertaken using dedicated earth-moving plant. The excavated contaminated soils would be stockpiled at designated area on site and covered by sheet to prevent dispersion of contamination 		The contaminated soil will be excavated for on-site reuse	Contractor	РВН4	Prior to commencement of construction works within the contaminated area	 Practice Guide (PG) for Investigation and Remediation of Contaminate d Land 	Implemented

EIA Ref.	EM&A Log Ref.	Reco	mmended Mitigat	ion Measures	Objectives of the Recommende d Measures & Main Concerns to address	Implementation Agent	Location / Timing	Implementation Stage	Requirements and/ or standards to be achieved	Implementation Status
		 during stockpiling. The Contractor should pay attention to the selection of suitable groundwater lowering schemes and discharge points if the groundwater table is higher than the contaminated soils during excavation. The Contractor should also obtain a valid Water Pollution Control Ordinance (WPCO) discharge licence from EPD where applicable. 							 Guidance Notes for Contaminate d Land Assessment and Remediation Guidance 	
S8.9 & Appendix 8.4	LC3	specified of the distribute shall be	depth, at least one excavation and for d along the bound	e excavation to the sample from the base our samples evenly ary of the excavation e assessment testing. nown below:					Manual for Use of Risk- Based Remediation Goals (RBRGs) for Contaminate	Implemented
		Locations Testing requirement Acceptance Criteria PBH4 PCBs RBRGs Park) • If the results of analysis below the RBRGs (Public Park), no further excavation will be required. If the analysis indicates presence of contamination (i.e. noncompliance of the acceptance criteria), further excavation shall be carried out in 0.5m increment vertically and/or horizontally depending on the location(s) of the sample(s) which has exceeded the acceptance criteria. Further sampling shall also be conducted for compliance testing. The process of						d Land Management		

EIA Ref.	EM&A Log Ref.	Recommended Mitigation Measures	Objectives of the Recommende d Measures & Main Concerns to address	Implementation Agent	Location / Timing	Implementation Stage	Requirements and/ or standards to be achieved	Implementation Status
		excavation, sampling and compliance testing should continue until all contaminated materials are removed and should be supervised by a Land Contamination Specialist.						
Appendix 8.4	LC4	A Remediation Report (RR) to demonstrate adequate clean-up shall be prepared and submitted to EPD for endorsement prior to the commencement of any construction/development works within the sites. No construction/development works shall be carried out prior to the endorsement of the RR by EPD.						Implemented
				Hazard to Life				
\$9.18	H1	Blasting activities regarding transport and use of explosives should be supervised and audited by competent site staff to ensure full compliance with the blasting permit conditions.	To ensure that the risks from the proposed explosives handling and transport would be acceptable	Contractor	Works areas at which explosives would be used	Construction stage	Dangerous Goods Ordinance	• N/A
S9.6, para.4	H2	Detonators shall not be transported in the same vehicle with other Category 1 Dangerous Goods.	To reduce the risk of explosion during the transport of cartridged emulsion	Contractor	-	Construction stage	 Dangerous Goods Ordinance 	• N/A
S9.6, para.8	H3	The explosives delivery trucks should be approved by Mines Division and should meet the regulatory requirements for transport of explosives.	To comply with the requirements for approval of an explosives	Contractor	-	Construction stage	 Dangerous Goods Ordinance 	• N/A

EIA Ref.	EM&A Log Ref.	Recommended Mitigation Measures	Objectives of the Recommende d Measures & Main Concerns to address	Implementation Agent	Location / Timing	Implementation Stage	Requirements and/ or standards to be achieved	Implementation Status
			delivery vehicle					
\$9.10, para.7 and \$9.18	H4	Blast cover should be provided for shaft at HMT, and kept closed during blasting. Provision of blast doors or heavy duty blast curtains should be implemented at the shaft to prevent flyrock and control the air overpressure.	To ensure safe use of explosives	Contractor	Shaft	Construction stage	-	• N/A
S9.16	H5	Only the required quantity of explosives for a particular blast should be transported to avoid the return.	To reduce risks during explosives transport	Contractor	Works areas at which explosives would be used	Construction stage	-	• N/A
S9.18	H7	The approved truck dedicated for transport of explosives should comply with the "Guidance Note on Requirements for Approval of an Explosives Delivery Vehicle" issued by CEDD Mines Division. The truck should be periodically inspected and properly maintained in good operation conditions. The fuel carried in the fuel tank should be minimized to reduce the duration of fire. Adequate fire fighting equipment shall be provided, inspected and replaced periodically (e.g. fire extinguishers).	To reduce the risk during explosives transport	Contractor	Works areas of which explosives would be used	Construction stage	Dangerous Goods Ordinance	• N/A
S9.18	H8	The driver and his assistant should be physically healthy, experienced and have good safe driving records. The driver should hold a proper driving licence for the approved transport truck. Dedicated training programme and regular road safety briefing	explosives	Contractor	Works areas at which explosives would be used	Construction stage	-	• N/A

EIA Ref.	EM&A Log Ref.	Recommended Mitigation Measures	Objectives of the Recommende d Measures & Main Concerns to address	Implementation Agent	Location / Timing	Implementation Stage	Requirements and/ or standards to be achieved	Implementation Status
		sessions/ workshops should be provided to enhance their safe driving attitude and practice. Smoking should be strictly prohibited.						
S9.18	H9	Emergency response plans in case of road accident should be prepared and implemented. The driver and his assistant should be familiar with the emergency procedures including evacuation, and proper communication/ fire-fighting equipment should be provided to the driver and his assistant.	To reduce the risk during explosives transport	Contractor	Works areas at which explosives would be used	Construction stage	-	• N/A
S9.18	H10	Close liaison and communication among Mines Division, Contractors for transport of explosives, and working staff of the blasting should be established. In case of any change of work schedule leading to cancellation or variation of explosives required, relevant parties should be informed in time to avoid unused explosives at the work sites.	To reduce the risk during explosives transport	Contractor	Works areas at which explosives would be used	Construction stage	-	• N/A
S9.18	H11	Close liaison and communication with Fire Services Department should be established to reduce the accidental detonation escalated from a fire. The contractors for transport of explosives should use the preferred transport routes as far as practicable.	To reduce the risk during explosives transport	Contractor	Works areas at which explosives would be used	Construction stage	-	• N/A
S9.18	H12	Contingency plan should be prepared for transport of explosives under severe weather conditions such as rainstorms and thunderstorms.	To reduce the risk during explosives transport	Contractor	Works areas at which explosives would be used	Construction stage	-	• N/A

EIA Ref.	EM&A Log Ref.	Recommended Mitigation Measures	Objectives of the Recommende d Measures & Main Concerns to address	Implementation Agent	Location / Timing	Implementation Stage	Requirements and/ or standards to be achieved	Implementation Status
S9.18	H13	For explosive transport, all packages of explosives on the truck should be properly stored in the truck compartment as required. Packaging of the explosives should remain intact (i.e. damage free) until they are transferred to the blasting site.	To reduce the risk during explosives transport	Contractor	Works areas at which explosives would be used	Construction stage	-	• N/A
\$9.18	H14	Availability of a parking space should be ensured before commencement of transport of explosives. Location for loading and unloading of explosives should be as close as possible to the shaft. No hot work should be performed in the vicinity during the time of loading and unloading.	To reduce the risk during explosives transport	Contractor	Works areas at which explosives would be used	Construction stage	-	• N/A
S9.18	H22	It is recommended to explore to minimize the use of the cartridged emulsion explosives and maximize the use of bulk emulsion explosive as far as practicable.	To reduce the risk during explosives transport	Contractor	Works areas at which explosives would be used	Construction stage	-	• N/A
\$9.18	H24	It is recommended to explore to use smaller explosive charges such as 'cast boosters' or 'mini-cast booster' instead of cartridged emulsion as primers for bulk emulsion. This option reduces the quantity of explosives required for transportation for the sections where bulk emulsion will be used.	To reduce the risk during explosives transport	Contractor	Works areas at which explosives would be used	Construction stage	-	• N/A
			Lan	dscape & Visual				
S10.10.1 Table 10.11	LV3	 <u>Good Site Management</u> Large temporary stockpiles of excavated material shall be covered with unobtrusive sheeting to prevent dust and dirt spreading to adjacent landscape areas and vegetation, and to create a neat and tidy visual appearance. 	Minimize visual impact	Contractor	Within Project site	Construction stage	-	Implemented

EIA Ref.	EM&A Log Ref.	Recommended Mitigation Measures	Objectives of the Recommende d Measures & Main Concerns to address	Implementation Agent	Location / Timing	Implementation Stage	Requirements and/ or standards to be achieved	Implementation Status
		 Construction plant and building material shall be orderly and carefully stored in order to create a neat and tidy visual appearance. 						
S10.10.1 Table 10.11	LV4	 <u>Screen Hoarding</u> Decorative screen hoarding should be erected to screen the public from the construction area. It should be designed to be compatible with the existing urban context. 	Minimize visual impact	Contractor	Within Project site	Construction stage	-	Implemented
S10.10.1 Table 10.11	LV5	 Lighting Control during Construction All lighting in the construction site shall be carefully controlled to minimize light pollution and night-time glare to nearby residencies and GIC. The Contractor shall consider other security measures, which shall minimize the visual impacts. 	Minimize visual impact	Contractor	Within Project site	Construction stage	-	• N/A
S10.10.1 Table 10.11	LV6	 <u>Erosion Control</u> The potential for soil erosion shall be reduced by minimizing the extent of vegetation disturbance on site and by providing a protective cover over newly exposed soil. 	Minimize landscape impact	Contractor	Within Project site	Construction stage	-	• N/A
S10.10.1 Table 10.11	LV7	 Tree Protection & Preservation Carefully protected during construction. Tree protection measures will be detailed at the Tree Removal Application stage and plans submitted to the relevant Government Department for approval in due course in accordance with ETWB TC no. 3/2006. 	Minimize landscape and visual impact	Contractor	Within Project site	Construction stage	 'Guidelines for Tree Risk Management and Assessment Arrangement on an Area Basis and on a Tree Basis', Greening, 	Implemented

EIA Ref.	EM&A Log Ref.	Recommended Mitigation Measures	Objectives of the Recommende d Measures & Main Concerns to address	Implementation Agent	Location / Timing	Implementation Stage	Requirements and/ or standards to be achieved	Implementation Status
S10.10.1 Table 10.11	LV8	 <u>Tree Transplantation</u> For trees unavoidably affected by the Project that have to be removed, where practical transplantation will be chosen as the top priority method of removal. If this is not possible or practical compensatory planting will be provided for trees unavoidably felled (See LV10). For trees unavoidably affected by the Project works that are transplanted, transplantation must be carried out in accordance with ETWB TCW 2/2004 and 3/2006. 	Minimize landscape and visual impact	Contractor	Within Project site and designated off-site locations	Prior to Construction stage	Landscape and Tree Management (GLTM) Section, DEVB Latest recommende d horticultural practices from GLTM Section, DEVB ETWB TCW 3/2006 Latest recommende d horticultural practices from Greening, Landscape and Tree Management (GLTM) Section, DEVB	• N/A


S10.10.1 TableU/9Compensatory Planting • For trees unavoidably affected by the Project that have to be removed, where practical transportation will be chosen as the top priority method of removal but if this is not possible or practical compensatory planting will be provided for trees unavoidably felled. All felled trees shall be compensator for by planting trees to the satisfaction of relevant Government projects Required numbers and locations of compensatory application process under ETWBT C3/2006.Ontractor impact and also enable and Tree shall be determined and agreed separately with Government during the Tree Felling Application process under ETWBT C3/2006.Ontractor impact and also enable and Tree shall be determined and agreed separately with Government during the Tree Felling Application process.Minimize visual impact and also enableWithin Project siteConstruction stage siteETWB TCW 3/2006 impact and also enableN/A10.11U/9Compensatory for by planting trees to the satisfaction of relevant Government projects Required numbers and locations of compensatory into public open spaces and along roadside amenty areas affected by the construction works and therefore be part of the bigger wider planting plans. Onsite compensatory additional receptor sites outside the Works Area shall be agreed separately with Government during the Tree Felling Application process.Compensatory for tree felling Application process.V/AV/A10.11Image: Manuel Manue	EIA Ref.	EM&A Log Ref.	Recommended Mitigation Measures	Objectives of the Recommende d Measures & Main Concerns to address	Implementation Agent	Location / Timing	Implementation Stage	Requirements and/ or standards to be achieved	Implementation Status
Table 10.11• For trees unavoidably affected by the Project that have to be removed, where practical transportation will be cohen as the top priority method of removal but if this is not possible or practical compensatory planting will be provided for trees unavoidably felled. All felled trees shall be compensated for by planting trees to the satisfaction of relevant Government projects. Required numbers and locations of compensatory trees shall be determined and agreed separately with Government during the Tree Felling Application process under ETWBITC 3/2006.sitesite3/2006 • Latest recommende d horticultural practices from Greening, Landscape and Tree Management (GITM) DEV8• Compensator planting is preferred but if necessary, additional receptor sites outside the Works Area shall be agreed separately with Government during the Tree Felling Applicationsitesite3/2006 • Latest recommende d horticultural practices from Greening, Landscape and Tree Management (GITM) DEV8• ETWB 									
	Table	1.09	 For trees unavoidably affected by the Project that have to be removed, where practical transportation will be chosen as the top priority method of removal but if this is not possible or practical compensatory planting will be provided for trees unavoidably felled. All felled trees shall be compensated for by planting trees to the satisfaction of relevant Government projects. Required numbers and locations of compensatory trees shall be determined and agreed separately with Government during the Tree Felling Application process under ETWBTC 3/2006. Compensatory tree planting may be incorporated into public open spaces and along roadside amenity areas affected by the construction works and therefore be part of the bigger wider planting plans. Onsite compensation planting is preferred but if necessary, additional receptor sites outside the Works Area shall be agreed separately with Government during the Tree Felling Application 	impact and also enhance	Contractor	-	Construction stage	3/2006 • Latest recommende d horticultural practices from Greening, Landscape and Tree Management (GLTM) Section, DEVB • ETWB TCW	• N/A

EIA Ref.	EM&A Log Ref.	Recommended Mitigation Measures	Objectives of the Recommende d Measures & Main Concerns to address	Implementation Agent	Location / Timing	Implementation Stage	Requirements and/ or standards to be achieved	Implementation Status
S11.4.4	CH1	The contractor should be alerted during the construction on the possibility of locating archaeological remains and as a precautionary measure, AMO shall be informed immediately in case of discovery of antiquities or supposed antiquities in the subject sites.	To preserve any cultural heritage items which may be removed and damaged by the excavation	Contractor	During construction works for cut and cover tunnels	Construction stage	AMOs requirements	Implemented
S12.6.1	СНЗ	 Protective covering should be provided for the buildings in the form of plastic sheeting; Buffer zones should be provided between the construction works and the external walls of the buildings and should be as large as site restrictions allow and be marked out by temporary fencing or hoarding; An underpinning scheme is required to transfer the existing column loadings to a deeper rock stratum. The supporting system includes cutting the existing ground floor slab to expose the existing pile caps and then construct transfer beams will tie up with the existing caps. Loadings of the transfer beams will be transferred to the rock socket piles installed at the two ends of the beams; The AAA settlement and tilting limit should be 6/8/10 mm and1/2000, 1/1500 and 1/1000; Monitoring of vibration levels will be undertaken during the construction phase and the Alert, Alarm and Action (AAA) vibration limit will be set at 5/6/7.5 mm/s. The monitoring proposal should be sent to AMO for comment;. 	Protect the building from damage from construction works	Contractor	Yau Ma Tei Police Station (Old Wing) (CKR-01)	Prior to commencement of and during the construction phase	 Guidelines for Cultural Heritage Impact Assessment EIAO-TM Annex 10 and Annex 19 AMO Proposed Vibration Limits 	• Implemented

EIA Ref.	EM&A Log Ref.	Recommended Mitigation Measures	Objectives of the Recommende d Measures & Main Concerns to address	Implementation Agent	Location / Timing	Implementation Stage	Requirements and/ or standards to be achieved	Implementation Status
		• Regular site inspections and monitoring works will be carried out by the contractor and the monitoring results will be submitted to the resident site staff of HyD to ensure compliance.						
S12.6.1		 Adopting diaphragm wall construction method; Grout curtain should be provided in front of the building; Recharging system should be installed as a contingency measure to mitigate the fluctuation of water table; the AAA settlement and tilting limit should be 6/8/10 mm and 1/2000, 1/1500 and 1/1000; Monitoring of vibration levels will be undertaken during the construction phase and the Alert, Alarm and Action (AAA) vibration limit will be set at 5/6/7.5 mm/s. The monitoring proposal should be sent to AMO for comment;. Regular site inspections and monitoring works will be carried out by the contractor and the monitoring results will be submitted to the resident site staff of HyD to ensure compliance. 	Protect the building from damage from construction works	Contractor	Yau Ma Tei Police Station (Old Wing) (CKR-01)	Prior to commencement of and during the construction phase	 Guidelines for Cultural Heritage Impact Assessment EIAO-TM Annex 10 and Annex 19 AMO Proposed Vibration Limits 	• Implemented
S12.6.1 Table 12.2		 The Alert, Alarm and Action (AAA) vibration limit will be set at 3/4/5 mm/s and a condition survey shall be carried out by the project proponent prior to the construction phase to confirm this assessment Vibration monitoring of the structure shall be employed during the construction phase to ensure that the level is not exceeded. The monitoring proposal should be sent to AMO for comment. 	Protect the building from damage from construction works	Contractor	Tin Hau Temple (CKR- 02)	Prior to commencement of and during the construction phase	 Guidelines for Cultural Heritage Impact Assessment EIAO-TM Annex 10 and Annex 19 AMO 	• Implemented

EIA Ref.	EM&A Log Ref.	Recommended Mitigation Measures	Objectives of the Recommende d Measures & Main Concerns to address	Implementation Agent	Location / Timing	Implementation Stage	Requirements and/ or standards to be achieved	Implementation Status
							Proposed Vibration Limits	
				EM&A Project				
S13.2	EM1	An Independent Environmental Checker needs to be employed as per the EM&A Manual	Control EM&A Performance	Highways Department	All construction sites	Construction stage	EIAO Guidance Note No. 4/2010 TM-EIAO	Implemented
S13.2-13.4	EM2	 An Environmental Team needs to be employed as per the EM&A Manual; Prepare a systematic Environmental Management Plan to ensure effective implementation of the mitigation measures; An environmental impact monitoring needs to be implemented by the Environmental Team to ensure all the requirements given in the EM&A Manual are fully complied with. 		Highways Department/ Contractor	All construction sites	Construction stage	 EIAO Guidance Note No. 4/2010 TM-EIAO 	Implemented

Appendix G Monitoring Schedule of the Reporting Month

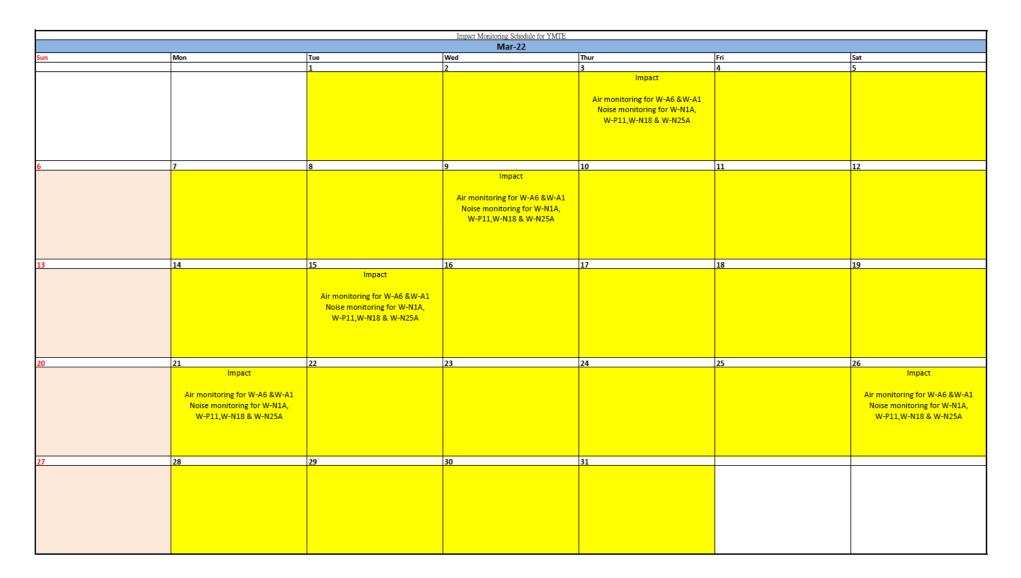

Appendix H Calibration Certificates (Air Monitoring)



Sibata LD-5R K-Factor Verification Test by Total Suspended Particulates HVS Test Report

Verification Test Date:	12-Sep-21	to	19-Sep-21
Next Verification Test Date:	20-Sep-22		
Unit-under-Test- Model No.	Sibata LD-5R		
Unit-under-Test Serial No.	992821		
Our Report Refrence No.	RPT-21-HVS-001	2	

Standard Equipment Information			
Verification Equipment Type		Tisch's TSP	Tish HVS
vernication Equipment Type		HVS	Calibrator
Standard Equipment Model No.		TE-5170X	TE-5028
Equipment serial no.	MFC	1049	1050
Last Calibration Date		4-Sep-21	24-Sep-20
Next Calibration Date		4-Nov-21	24-Sep-21

Verification	Date	Time			K-Factor		Total Counts	TSP Sample	Dust Concentration (ug/m3), (C)
Test No.		Start-time	End-time	Elapsed Time (in min)	K-Factor (K=C/R)	x-axis	(TC)	ID No.	y axis
1	12/9/2021	4012.12	4014.84	163.20	0.00115	85.67	13981	R211363/1	98
2	12/9/2021	4014.84	4018.16	199.20	0.00125	93.00	18526	R211363/2	116
3	12/9/2021	4018.16	4021.16	180.00	0.00101	89.00	16020	R211363/3	89
4	19/9/2021	4046.44	4049.65	192.60	0.00040	63.67	12262	R211364/1	26
5	19/9/2021	4049.65	4052.95	198.00	0.00041	65.33	12936	R211364/2	27
6	19/9/2021	4052.95	4055.56	156.60	0.00066	59.33	9291.6	R211364/3	39
					0.00081				

0.8

K-Factor to be inputted in LD-5R (corrected 1 decimal point):


By Linear Regression of y on x: slope, mh= 2.5858 intercept,ch= -130.6851 *Correlation Coefficient,R= 0.9584 Verification Test Result: Strong Correlation, Results were accepted. \ast If the Correlation Coefficient, R is <0.5. Checking and Reverification are required.

K_

Technical Manager

Verified By:

Date: 09-10-2021







Website: www.acuityhk.com

Unit C, 11/F, Ford Glary Plaza, Nos. 57–59 Wing Hong Street, Cheung Sha Wan, Kowloon.

C Tel. : (852) 2698 6833 Fax.: (852) 2698 9383

0

Sibata LD-5R K-Factor Verification Test by Total Suspended Particulates HVS Test Report

Verification Test Date:	27-Jun-21	to	1-Jul-21
Next Verification Test Date:	1-Jul-22		
Unit-under-Test- Model No.	Sibata LD-5R		
Unit-under-Test Serial No.	851819		
Our Report Refrence No.	RPT-21-HVS-0006		

Standard Equipment Information			
Verification Equipment Type		Tisch's TSP	Tish HVS
vernication equipment Type		HVS	Calibrator
Standard Equipment Model No.		TE-5170X	TE-5028
Equipment serial no.	MFC	1049	1050
Last Calibration Date		17-Jun-21	24-Sep-20
Next Calibration Date		17-Aug-21	24-Sep-21

Verification	Date	Time			K-Factor	Counts/ Minute (R)	Total Counts	TSP Sample	Dust Concentration (ug/m3), (C)
Test No.		Start-time	End-time	Elapsed Time (in min)	K-Factor (K=C/R)	x-axis	(TC)	ID No.	y axis
1	27/6/2021	1254.37	1257.37	180.00	0.00118	28.33	5100	R210872/1	33.33
2	27/6/2021	1258.44	1261.44	180.00	0.00105	56.33	10140	R210872/2	59.26
3	27/6/2021	1262.31	1265.31	180.00	0.00127	7.67	1380	R210872/3	9.72
4	1/7/2021	1265.84	1268.84	180.00	0.00098	74.67	13440	R210887/1	73.15
5	1/7/2021	1269.10	1272.10	180.00	0.00095	14.67	2640	R210887/2	13.89
6	1/7/2021	1272.50	1275.50	180.00	0.00093	26.00	4680	R210887/3	24.07
					0.00106				

1.1

K-Factor to be inputted in LD-5R (corrected 1 decimal point):

9843
5024
9941

Verification Test Result: Strong Correlation, Results were accepted. * If the Correlation Coefficient, R is <0.5. Checking and Re-


verification are required.


Verified By:

Technical Manager

Date: 20-07-2021



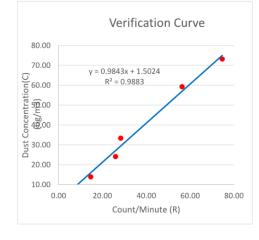

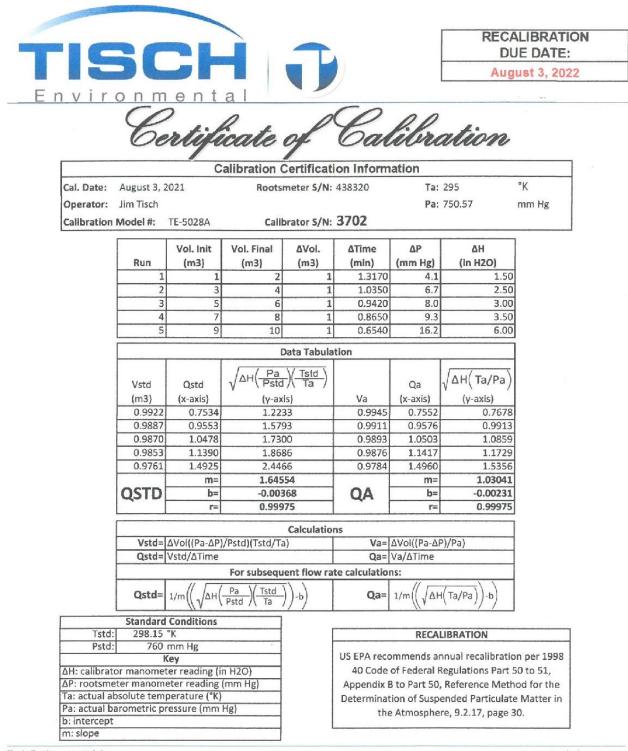

Tisch Environmental, Inc. 145 South Miami Avenue village of Cleves, OH 45002

www.tisch-env.com TOLL FREE: (877)263-7610 FAX: (513)467-9009

創新科儀有限公司

•	IVOL SAMPLER	CALI	BRATION	DATA SH	HEET (TSP	')
		Site	e Information			
Location:	YMT Catholic Primary School	Site ID:	W-A1	Date:	22-Feb	-2022
Serial No:	1084	Model:	TE-5170X	Operator:	Tir	n
		Ambi	ient Conditio	า		
Corrected Pro	essure (mm Hg):	766.6	Temperature	(deg K):	283.	.7
		Calib	oration Orifice	ć		
Model:			TE-5028A	Slope:	1.030	41
Serial No.:			3702	Intercept:	-0.002	
Calibration D	ue Date:		3-Aug-22	Corr. Coeff:	0.999	975
		Cali	ibration Data			
Plate or	In,H2O		ibration Data a, X-Axis	I, CFM	IC, Y-	Axis
Test #	(in)	(m3/min)	(chart)	(corre	
1	1.19		1.092	39.9	41.0	17
2	2.34	1.530		41.0	42.20	
3	3.45		1.858	41.8	43.03	
4	3.91		1.978	42.0	43.23	
5	4.38		2.093	42.4	43.6	4
-	tion Relationship (Qa on x-axis					
Sampler Calibta m=	tion Relationship (Qa on x-axis 2.5195	s, IC on y-a b=	xis) 38.3264	-	Corr. Coeff=	0.9990
- m=				-	Corr. Coeff=	0.9990
m= Sam	2.5195	b= 40	38.3264 CFM Calculations	-	Corr. Coeff=	0.9990
m= Sam Qstd = 1/m[Sqrt	2.5195 npler set point(SSP) (H2O(Pa/Pstd)(Tstd/Ta))-b]	b= 40	38.3264 CFM Calculations m = sampler slo		Corr. Coeff=	0.9990
m= Sam Qstd = 1/m[Sqrt	2.5195 npler set point(SSP) (H2O(Pa/Pstd)(Tstd/Ta))-b]	b= 40	38.3264 CFM Calculations m = sampler slo b = sampler inter	ercept	Corr. Coeff=	0.9990
m= Sam Qstd = 1/m[Sqrt IC = I[Sqrt(Pa/P	2.5195 npler set point(SSP) (H2O(Pa/Pstd)(Tstd/Ta))-b] (std)(Tstd/Ta)]	b= 40	38.3264 CFM Calculations m = sampler slo b = sampler inte I = chart respon	ercept se	Corr. Coeff=	0.9990
m= Sam Qstd = 1/m[Sqrt IC = I[Sqrt(Pa/P Qstd = standard	2.5195 ppler set point(SSP) (H2O(Pa/Pstd)(Tstd/Ta))-b] (std)(Tstd/Ta)] flow rate	b= 40	38.3264 CFM Calculations m = sampler slo b = sampler inte I = chart respon Tav = average ten	ercept se mperature	Corr. Coeff=	0.9990
m= Sam Qstd = 1/m[Sqrt IC = I[Sqrt(Pa/P Qstd = standard IC = corrected c	2.5195 ppler set point(SSP) (H2O(Pa/Pstd)(Tstd/Ta))-b] std)(Tstd/Ta)] flow rate hart response	b= 40	38.3264 CFM Calculations m = sampler slo b = sampler inte I = chart respon	ercept se mperature	Corr. Coeff=	0.9990
m= Sam Qstd = 1/m[Sqrt IC = I[Sqrt(Pa/P Qstd = standard IC = corrected c I = actual chart n	2.5195 ppler set point(SSP) (H2O(Pa/Pstd)(Tstd/Ta))-b] std)(Tstd/Ta)] flow rate hart response response	b= 40	38.3264 CFM Calculations m = sampler slo b = sampler inte I = chart respon Tav = average ten	ercept se mperature	Corr. Coeff=	0.9990
m= Sam Qstd = 1/m[Sqrt IC = I[Sqrt(Pa/P Qstd = standard IC = corrected c I = actual chart n m = calibrator (2.5195 ppler set point(SSP) (H2O(Pa/Pstd)(Tstd/Ta))-b] std)(Tstd/Ta)] flow rate hart response response Qstd slope	b= 40	38.3264 CFM Calculations m = sampler slo b = sampler inte I = chart respon Tav = average ten	ercept se mperature	Corr. Coeff=	0.9990
m= Sam Qstd = 1/m[Sqrt IC = I[Sqrt(Pa/P Qstd = standard IC = corrected c I = actual chart n m = calibrator Q b = calibrator Q	2.5195 ppler set point(SSP) (H2O(Pa/Pstd)(Tstd/Ta))-b] std)(Tstd/Ta)] flow rate hart response response Qstd slope lstd intercept	6	38.3264 CFM Calculations m = sampler slo b = sampler inte I = chart respon Tav = average ten	ercept se mperature	Corr. Coeff=	0.9990
m= Sam Qstd = 1/m[Sqrt IC = I[Sqrt(Pa/P Qstd = standard IC = corrected c I = actual chart 1 m = calibrator (b = calibrator Q Ta = actual temp	2.5195 apler set point(SSP) (H2O(Pa/Pstd)(Tstd/Ta))-b] std)(Tstd/Ta)] flow rate hart response response 2std slope 2std slope 2std intercept perature during calibration (deg	b= <u>40</u> (38.3264 CFM Calculations m = sampler slo b = sampler inte I = chart respon Tav = average ten	ercept se mperature	Corr. Coeff=	0.9990
m= Sam Qstd = 1/m[Sqrt IC = I[Sqrt(Pa/P Qstd = standard IC = corrected c I = actual chart 1 m = calibrator (b = calibrator Q Ta = actual temp Pa = actual press	2.5195 apler set point(SSP) (H2O(Pa/Pstd)(Tstd/Ta))-b] std)(Tstd/Ta)] flow rate hart response response 2std slope 2std slope 2std intercept perature during calibration (deg sure during calibration (mm Hg)	b= <u>40</u> (38.3264 CFM Calculations m = sampler slo b = sampler inte I = chart respon Tav = average ten	ercept se mperature	Corr. Coeff=	0.9990
m= Sam Qstd = 1/m[Sqrt IC = I[Sqrt(Pa/P Qstd = standard IC = corrected c I = actual chart 1 m = calibrator (b = calibrator (Ta = actual temp Pa = actual press Tstd = 298 deg 1	2.5195 apler set point(SSP) (H2O(Pa/Pstd)(Tstd/Ta))-b] std)(Tstd/Ta)] flow rate hart response response 2std slope 2std slope 2std slope 2std intercept berature during calibration (deg sure during calibration (mm Hg) K	b= <u>40</u> (38.3264 CFM Calculations m = sampler slo b = sampler inte I = chart respon Tav = average ten	ercept se mperature	Corr. Coeff=	0.9990
m= Sam Qstd = 1/m[Sqrt IC = I[Sqrt(Pa/P Qstd = standard IC = corrected c I = actual chart 1 m = calibrator (b = calibrator (Ta = actual temp Pa = actual press Tstd = 298 deg 1 Pstd = 760 mm 1	2.5195 apler set point(SSP) (H2O(Pa/Pstd)(Tstd/Ta))-b] std)(Tstd/Ta)] flow rate hart response response 2std slope 2std slope 2std intercept berature during calibration (deg sure during calibration (mm Hg) K Hg	b= <u>40</u> (38.3264 CFM Calculations m = sampler slo b = sampler inte I = chart respon Tav = average ten	ercept se mperature	Corr. Coeff=	0.9990
m= Sam Qstd = 1/m[Sqrt IC = I[Sqrt(Pa/P Qstd = standard IC = corrected c I = actual chart n m = calibrator (b = calibrator (Ta = actual temp Pa = actual temp Pa = actual press Tstd = 298 deg 1 Pstd = 760 mm 1 For subsequent of	2.5195 apler set point(SSP) (H2O(Pa/Pstd)(Tstd/Ta))-b] std)(Tstd/Ta)] flow rate hart response response 2std slope 2std slope 2std slope 2std intercept berature during calibration (deg sure during calibration (mm Hg) K	b= <u>40</u> (38.3264 CFM Calculations m = sampler slo b = sampler inte I = chart respon Tav = average ten	ercept se mperature	Corr. Coeff=	0.9990
m= Sam Qstd = 1/m[Sqrt IC = I[Sqrt(Pa/P Qstd = standard IC = corrected c I = actual chart 1 m = calibrator (b = calibrator (Ta = actual temp Pa = actual temp Pa = actual press Tstd = 298 deg 1 Pstd = 760 mm 1 For subsequent of	2.5195 apler set point(SSP) (H2O(Pa/Pstd)(Tstd/Ta))-b] std)(Tstd/Ta)] flow rate hart response response 2std slope 2std slope 2std slope 2std intercept berature during calibration (deg sure during calibration (mm Hg) K Hg calculation of sampler flow:	b= <u>40</u> (38.3264 CFM Calculations m = sampler slo b = sampler inte I = chart respon Tav = average ten	ercept se mperature	Corr. Coeff=	0.9990

Acuity Sustainability Consulting Ltd.

創新科儀有限公司

	HIVOL SAMPLER	CALIB	KATION .	DATA SHEE	1 (15P)	
		Site	Information	n		
Location:	YMT Catholic Primary School	Site ID:	₩-А1	Date:	14-Mar-2022	
Serial No:	1084	Model:	TE-5170X	Operator:	Tim	
		Ambier	nt Conditio			
Corrected Pr	essure (mm Hg):	759.0	Temperature		297.1	
		Calibre	ation Orifi	Ce	•	
Model:			-5028A	Slope:	1.03041	
Serial No.:			3702	Intercept:	-0.00231	
Calibration	Due Date:	3-	Aug-22	Corr. Coeff:	0.99975	
				1		
D1-4	L 1100	-	ration Data			
Plate or	In,H2O	-	, X-Axis	I, CFM	IC, Y-Axis	
<u>Test #</u>	(in) 1.35		3/min) 1.131	(chart) 39.5	(corrected) 39.53	
2	2.12		1.417	40.1	40.13	
3	3.28	1.761		40.7	40.73	
4	3.95		1.933	41.1	41.14	
5	4.35		2.028	41.3	41.34	
m=	tion Relationship (Qa on x-axis	b=	37.3007	-	Corr. Coeff= 0.9991	
Sam	npler set point(SSP)	40	CFM	_		
IC = I[Sqrt(Pa/P)] Qstd = standard IC = corrected c I = actual chart n m = calibrator Q b = calibrator Q Ta = actual temp $Pa = actual press$	flow rate hart response response 2std slope 2std intercept perature during calibration (deg sure during calibration (mm Hg) K	К)	Iculations m = sampler sl b = sampler int I = chart respon Tav = average te Pav = average p	tercept nse emperature		
Tstd = 298 deg 1 Pstd = 760 mm 1	8					
Pstd = 760 mm l For subsequent c	calculation of sampler flow: rt(298/Tav)(Pav/760)]					
Pstd = 760 mm l For subsequent c	calculation of sampler flow:					

創新科儀有限公司

Г	IIVOL SAMPLER			DATA SH	IEET (TSP)
		Site	Information		
Location:	Man Cheong Building	Site ID:	W-A6	Date:	22-Feb-2022
Serial No:	1050	Model:	TE-5170X	Operator:	Tim
		Ambi	ent Conditio	n	
Corrected Pr	essure (mm Hg):	766.6	Temperature	(deg K):	283.7
		Calib	ration Orifice	e	
Model:		Т	E-5028A	Slope:	1.03041
Serial No.:			3702	Intercept:	-0.00231
Calibration E	Due Date:	3	3-Aug-22	Corr. Coeff:	0.99975
		Cali	bration Data		
Plate or	In,H2O	Q	a, X-Axis	I, CFM	IC, Y-Axis
Test #	(in)	('	m3/min)	(chart)	(corrected)
1	1.13		1.064	39.5	40.66
2	2.26	1.504		40.7	41.89
3	2.45		1.566	40.8	42.00
4	3.14		1.772	41.4	42.61
5	3.89		1.972	42.0	43.23
	ation Relationship (Qa on x-axi				_
m=	2.8149	b=	37.6435	-	Corr. Coeff= 0.9993
San	npler set point(SSP)	40	CFM	_	
0.41 1/ 10		C	alculations		
	t(H2O(Pa/Pstd)(Tstd/Ta))-b]	C	m = sampler slo	-	
Qstd = 1/m[Sqr IC = I[Sqrt(Pa/I		C	m = sampler slo b = sampler inte	ercept	
IC = I[Sqrt(Pa/I	Pstd)(Tstd/Ta)]	С	m = sampler slo b = sampler into I = chart respon	ercept ise	
IC = I[Sqrt(Pa/I Qstd = standard	Pstd)(Tstd/Ta)] flow rate	С	m = sampler slo b = sampler inte I = chart respon Tav = average te	ercept ise mperature	
IC = I[Sqrt(Pa/F)] Qstd = standard IC = corrected co	Pstd)(Tstd/Ta)] flow rate chart response	с	m = sampler slo b = sampler into I = chart respon	ercept ise mperature	
IC = I[Sqrt(Pa/I Qstd = standard	Pstd)(Tstd/Ta)] flow rate chart response response	С	m = sampler slo b = sampler inte I = chart respon Tav = average te	ercept ise mperature	
IC = I[Sqrt(Pa/F Qstd = standard IC = corrected o I = actual chart	Pstd)(Tstd/Ta)] flow rate chart response response Qstd slope	с	m = sampler slo b = sampler inte I = chart respon Tav = average te	ercept ise mperature	
IC = I[Sqrt(Pa/I)] Qstd = standard IC = corrected of I = actual chart m = calibrator b = calibrator (Content of the standard stand	Pstd)(Tstd/Ta)] flow rate chart response response Qstd slope		m = sampler slo b = sampler inte I = chart respon Tav = average te	ercept ise mperature	
IC = I[Sqrt(Pa/I)] Qstd = standard IC = corrected of I = actual chart m = calibrator b = calibrator (O) Ta = actual tem Pa = actual pression $Pa = actual pression Pa = actual press$	Pstd)(Tstd/Ta)] flow rate chart response response Qstd slope Qstd slope Qstd intercept perature during calibration (deg sure during calibration (mm Hg)	К)	m = sampler slo b = sampler inte I = chart respon Tav = average te	ercept ise mperature	
IC = I[Sqrt(Pa/I)] Qstd = standard IC = corrected of I = actual chart m = calibrator b = calibrator of Ta = actual tem	Pstd)(Tstd/Ta)] flow rate chart response response Qstd slope Qstd slope Qstd intercept perature during calibration (deg sure during calibration (mm Hg)	К)	m = sampler slo b = sampler inte I = chart respon Tav = average te	ercept ise mperature	
IC = I[Sqrt(Pa/I)] Qstd = standard IC = corrected of I = actual chart m = calibrator b = calibrator (Ta = actual tem Pa = actual press Tstd = 298 deg Pstd = 760 mm	Pstd)(Tstd/Ta)] flow rate chart response response Qstd slope Qstd intercept perature during calibration (deg sure during calibration (mm Hg) K Hg	К)	m = sampler slo b = sampler inte I = chart respon Tav = average te	ercept ise mperature	
IC = I[Sqrt(Pa/I)] Qstd = standard IC = corrected of I = actual chart m = calibrator b = calibrator (O Ta = actual tem Pa = actual press Tstd = 298 deg Pstd = 760 mm For subsequent	Pstd)(Tstd/Ta)] flow rate chart response response Qstd slope Qstd slope Qstd intercept perature during calibration (deg sure during calibration (mm Hg) K	К)	m = sampler slo b = sampler inte I = chart respon Tav = average te	ercept ise mperature	
IC = I[Sqrt(Pa/I)] Qstd = standard IC = corrected of I = actual chart m = calibrator b = calibrator (O Ta = actual tem Pa = actual press Tstd = 298 deg Pstd = 760 mm For subsequent	Pstd)(Tstd/Ta)] flow rate chart response response Qstd slope Qstd intercept perature during calibration (deg sure during calibration (mm Hg) K Hg calculation of sampler flow:	К)	m = sampler slo b = sampler inte I = chart respon Tav = average te	ercept ise mperature	

創新科儀有限公司

		Site Inf	ormation		(TSP)
Location:	Man Cheong Building	Site ID:	W-A6	Date:	14-Mar-2022
Serial No:	1050	Model:	TE-5170X	Operator:	Tim
		<u> </u>	Jondition	-	
Corrected Press	sure (mm Hg):	Ambient (emperature	(deg K):	297.1
	· ·	Calibratio	_		1
Model:			028A	Slope:	1.03041
Serial No.:		3702		Intercept:	-0.00231
Calibration Due	Date:	3-Au	ıg-22	Corr. Coeff:	0.99975
		Calibrat	ion Data		
Plate or	In,H2O	1	X-Axis	I, CFM	IC, Y-Axis
Test #	(in)		min)	(chart)	(corrected)
1	1.17	1.0		39.6	39.63
2	1.48	1.1	1.184		40.13
3	1.74	1.283		40.5	40.53
4	2.86	1.6	-	41.7 42.0	41.74 42.04
Sampler Calibtatior m=	n Relationship (Qa on x-axis, IC 3.5392	C on y-axis) b=	35.9408		Corr. Coeff= 0.9995
Samp	ler set point(SSP)	40 CF	M	_	
Qstd = 1/m[Sqrt(H2 IC = I[Sqrt(Pa/Pstd)	O(Pa/Pstd)(Tstd/Ta))-b] (Tstd/Ta)]	b	ations = sampler slo = sampler into = chart respor	ercept	
Pa = actual pressure Tstd = 298 deg K Pstd = 760 mm Hg	response onse I slope intercept ture during calibration (deg K) during calibration (mm Hg) ulation of sampler flow:	Ta	v = average te	mperature	

Appendix I Calibration Certificates (Noise)

(A+A)*L Acoustics and Air Testing Laboratory Co. Ltd. ■ ■ ■ ■ ■ ■ ■ ■ ■ ■ ■ ■ ■ ■ ■ ■ ■ ■ ■
Certificate of Calibration
for
Description: Sound Level Meter
Manufacturer: NTi Auaio
Type No.: XL2 (Sec al No.: A24-13661-E0)
Microphone: ACJ 7052 (Serial No.: 73912)
Preamplifier: NT i Audio MA220 (M2211) (Serial No.:5735)
Supmitted by:
Customer: Acuity Sustainability Consulting Limited
Address: Unit C, 1c/F, Ford Glory Plaza, No. 37-39 W ng Hong
Stree, Cheung Sha Wan, Kowloon
Upon receipt for calibration, the instrument was found to be:
 ✓ Within (31.5 Fz - 8k Hz) □ Outside the allowable tolerance.
 The test equipment used for calibration are traceable to National Standards via: The Government of the Hong Kong Special Administrative Region Standard & Calibration Laboratory
Date of receipt: 17 September 2021
Date of receipt: 17 September 2021 Date of calibration: 23 September 2021
Date 3. Pandration: 23 September 2021
Calibrated by:Calibration Technician Certified by:/ Mr. Ng Yan Wa
Date of issue. 27 September 2021
Certificate No.: APJ21-085 CC001
Room 422, Leader In Jur trial Centre, 57-59 Au Pui Wan Street , Fo Tan, Shatin, N.T., Hong Kong
Tel: (852) 2668 3423 Homepage: http://www.aa-lab.com E-mail : inquiry@aa-lab.com

(A+A)*L Acoustics and Air Testing Laboratory Co.Ltd. 聲量】||| 聲學及空氣測試實驗室有限公司

1. Calibration Precaution:

- The unit-under-test (UUT) was allowed to stabilize in the laboratory for over 24 hours, and switched on to warm up for over 10 minutes before the commencement of the test.
- The results presented are the mean of 3 measurements at each calibration point.

2. Calibration Conditions:

Air Temperature:24.0 °CAir Pressure:1001 hPaRelative Humidity:55.7 %

3. Calibration Equipment:

	Туре	Serial No.	Calibration Report Number	Trace, h le to
Multifunction Calibrator	B&K 42: 6	2288467	AV200041	HOKS

4. Calibration Results

Sound Pressure Level

Reference Sound Fressure Level

Set i	ing of l	Unit-under-t	est (UUT)	App	lied value	UUT Reading,	IEC 61672 Class 1	
Range, dB	F req.	Weighting	Tim. Weighting	Level, d'B	Frequency, Hz	dB	Specification, dB	
30-130	aB/	A SPI	Fast	94	1000	94.0	±0.4	

Linearity

Sett	Setting of Unit-under-test (UUT)			App	Applied value		IEC 61672 Class
Range, dB	Freq. V	Veighting	Time Weighting	Level, JB	Frequency, Hz	dB	Specification, dB
				94		94.0	Ref
30-130	dBA	SPL	Fast	104	1000	104.0	±0.3
				114		114.0	±0.3

a	TTT	
me	Weigr	HILL CT

Sett	ag af Uni	t-under-t	est (UUT)	App	lied value	UUT Reading,	IEC 61672 Class 1
Range, d'S	Freq. W	eighting	Cime Weighting	Level, dB	Frequency, Hz	dB	Specification, dB
32-130	dBA	SPL	Fast	94	1000	94.0	Ref
5 -150	uва	SPL	Slow	94	1000	94.0	±0.3

2 of 4

Certificate No.: APJ21-085 CC001

Room 422,Leader In Juritrial Centre,57-59 Au Pui Wan Street ,Fo Tan, Shatin,N.T.,Hong Kong Tel: (852) 2668 3423 Fax:(852) 2668 6946 Homepage: http://www.aa-lab.com E-mail : inquiry@aa-lab.com

(A+A)*L Acoustics and Air Testing Laboratory Co. Ltd. 聲學及空氣測試實驗室有限公司

Frequency Response

Linear Response

Setting of Unit-under-test (UUT)			Appl	ied value	UUT Reading,	IEC 61672 Class 1
Range, dB	Freq. Weighting	Time Weighting	Level, dF.	Frequency, Hz	dB	Specification, dB
			4	31.5	94.1	±2.0
			~	63	94.1	±1.5
				125	94.1	±1.5
				250	94.0	+1.4
30-130	dB SPL	Fast	94	500	94.0	±1.4
				1000	94.0	Ref
				2000	94.3	±1.6
				4000	95.1	-1.6
				8000	94.3	+2.1; -3.1

A-weighting

Sett	ing of Unit-under-t	est (UUT)	Appl	ied value	UUT Reac in g,	IEC 61672 Class
Range, dB	Freq. Weighting	Time Weighting	Level, dB	Frequency, Hz	dB	Specification, dB
				31.5	54.7	-39.4 ±2.0
	\sim			63	67.9	-26.2 ±1.5
				125	7'3.0	-16.1±1.5
				250	85.4	-8.6±1.4
30-130	C.BA SPL	Fast	94	500	90.8	-3.2±1.4
				1000	94.0	Ref
				2000	95.5	$\pm 1.2 \pm 1.6$
				4000	96.1	$\pm 1.0 \pm 1.6$
				8000	93.9	-1.1+2.1; -3.1

C-weighting

Sett	ing of Unit-under-t	est (UUT)	A',pl	lied value	UUT Reading,	IEC 61672 Class 1
Range, dB	Freq. Weighting	Tir. c Weighting	Level, dB	Frequency, Hz	dB	Specification, dB
				31.5	91.1	-3.0±2.0
			Ĩ.	63	93.3	-0.8±1.5
			R) H	125	93.9	-0.2 ± 1.5
		~		250	94.0	-0.0±1.4
30-130	dBC SPL	Fast	94	500	94.0	-0.0 ± 1.4
	7			1000	94.0	Ref
				2000	94.2	-0.2 ± 1.6
)/	•	4000	94.3	-0.8±1.6
				8000	91.3	-3.0 +2.1: -3.1
	РЈ21-055-СС001					Page 3 of 4
Room 422,Leader	In Justrial Centre,5	7-59 Au Pui Wan S	Street , Fo Ta	n, Shatin,N.T.,H	long Kong	
	4	Tel: (852) 2668		Fax:(852)2		
	Homenage	: http://www.aa-lal	b.com E-	mail: inquiry@a	a-lab.com	

(A+A)*L Acoustics and Air Testing Laboratory Co. Ltd. 聲學及空氣測試實驗室有限公司

5. Calibration Results Applied

The results apply to the particular unit-under-test only. All calibration points are within manufacture's specification as IEC 61672 Class 1.

Uncertainties of Applied Value:

94 dB	31.5 Hz	± 0.05
	63 Hz	± 0.05
	125 Hz	+ 0.05
	250 Hz	- 0.05
	500 Hz	± 0.05
	1000 Hz	± 0.05
	2000 Hz	± 0.05
	4000 Hz	± 0.05
	8000 Hz	± 0.10
104 dB	1000 Hz	± 0.05
114 dB	1000 Hz	± 0.05

The uncertainties are evaluated for a 25% con5dence level.


Note:

The values given in this certification only related to the values measured at the time of the calibration and any uncertainties quoted will not allow for the equipment long-term drift, variations with environment I changes, vibration and shock during transportation, overloading, mis-handling, or the capability of any other laboratory to repeat the calibration. (A+A)*L shall not be liable for any loss or damage resulting from the use of the equipment.

The second	
Certificate No.: APJ21-055 CC001	Page 4 of 4
Room 422, Leader in Justrial Centre, 57-59 Au Pui Wan Street, Fo Tan, Shatin, N.T., Hong Kong	
Tel: (852) 2668 3423 Fax:(852) 2668 6946 Homepage: http://www.aa-lab.com E-mail : inquiry@aa-lab.com	

**

▲ Acoustics and Air Testing Laboratory Co. Ltd.	
Certificate of Calibration	
for	1
Description: Sound Level Meter	
Manufacturer: RION	
Type No.: NL-31 (Serial No.: 00303811)	
Microphone: RION UC-53A (Seria No.:322686)	
Preamplifier: FICN NH-21 (Serial No.:32330)	
Submitted by:	
Customer: Acui y Sustainability Consulting Limited	
Address: Unit '908 Nos. 301-305 Castle Peak Road,	
Kwai Chung, N.T.	
Upon receipt for calibration, the instrument was found to be:	
☑ Within	
□ Outside	
the allowable tolerance.	
 The test equipment used for calibration are traceable to National Standards via: The Government of The Hong Kong Special Administrative Region Standard & Calibration Laboratory 	
Date of receipt: 23 April 2021	
Date of calibration: 27 April 2021	
Calibrance by: Certified by: NWM	
Calibration Technicia 1 // Mr. Ng Yan Wa	
Date of issue: 27 April 2021	
Certificate No.: APJ21-012-CC001	
Room 422, Leader Incustrial Centre, 57-59 Au Pui Wan Street, Fo Tan, Shatin, N.T., Hong Kong	
Tel: (852) 2668 3423 Fax:(852) 2668 6946 Homepage: http://www.aa-lab.com E-mail: inquiry@aa-lab.com	

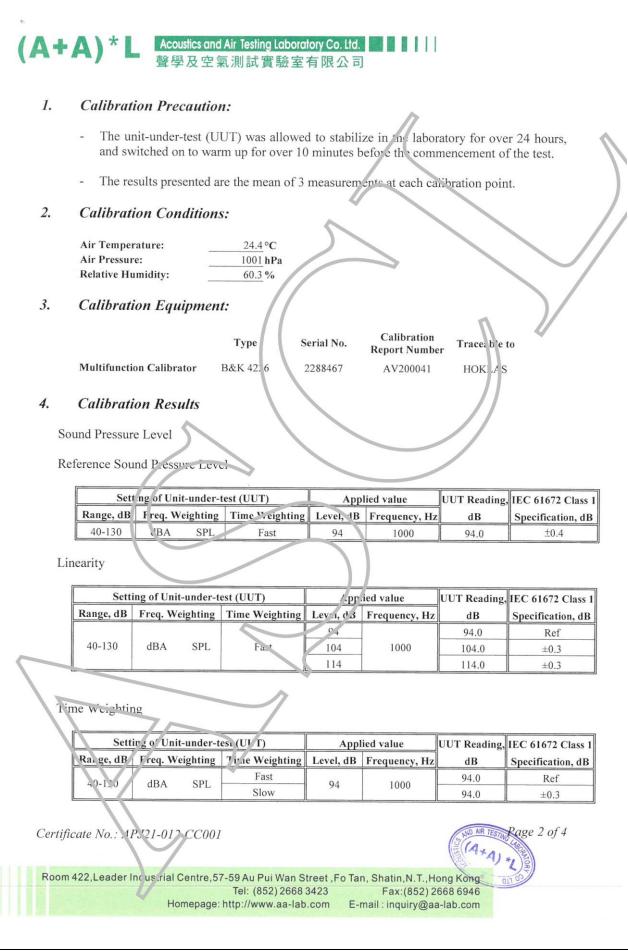

(A+A) Acoustics and Air Testing Laboratory Co. Ltd. 聲學及空氣測試實驗室有限公司 *

Frequency Response

Linear Response

Sett	ing of Uni	t-under-t	est (UUT)	Appl	ie / value	UUT Reading,	IEC 61672 Class 1
Range, dB	Freq. W	eighting	Time Weighting	Level, dB			Specification, dB
				4	31.3	\$3.9	±2.0
					63	94.1	±1.5
					125	94.1	±1.5
					250	94.1	±1.4
40-130	dB	SPL	Fast	01	.00	94.0	±1.4
					1000	94.0	Ref
					2000	93.9	±1.6
					4000	93.5	±1.6
					8000	91.	+2.1, -3.1

A-weighting

Sett	ing of Unit-under-t	est (UUT)	Appl	ied value	UUT Reac in g,	IEC 61672 Class	
Range, dB	Freq. Weighting	Time Weighting	evel, dB	Frequency, Hz	dB	Specification, dE	
				31.5	54.7	-39.4 ±2.0	
				63	67 3	-26.2±1.5	
				125	78.0	-16.1±1.5	
		\sim		250	85.4	-8.6±1.4	
40-130	dBA SPL	Fast	94	500	90.8	-3.2 ± 1.4	
				1000	94.0	Ref	
				2000	95.0	$+1.2 \pm 1.6$	
				4000	94.5	$+1.0 \pm 1.6$	
				8000	90.6	-1.1+2.1; -3.1	

C-weighting

	Setti	ing of Unit-under-to	est (UUT)	Apr 1	ied value	UUT Reading,	IEC 61672 Class 1
	Range, dB	Freq. Weighting	Time Weighting	Level, 1B	Frequency, Hz	dB	Specification, dB
					31.5	91.0	-3.0 ±2.0
					63	93.3	-0.8±1.5
					125	93.9	-0.2 ± 1.5
					250	94.1	-0.0 ± 1.4
	40-130	dBC SPI	Fast	94	500	94.1	-0.0 ± 1.4
					1000	94.0	Ref
		7			2000	93.7	-0.2 ± 1.6
					4000	92.7	-0.8 ± 1.6
					8000	88.7	-3.0 +2.1: -3.1
Certific	cate No.: Al	P.121-012 CC001	~		Source of the second	R TESTING LAGORITAGE	Page 3 of 4
Room	422,Leader I	n us rial Centre,5 Homepage:	7-59 Au Pui Wan S Tel: (852) 2668 http://www.aa-lab	3423	n, Shatin,N.T.,H Fax:(852)2 mail : inquiry@a	2668 6946	

(A+A)*L Acoustics and Air Testing Laboratory Co. Ltd. 聲學及空氣測試實驗室有限公司

5. Calibration Results Applied

The results apply to the particular unit-under-test only. Al calibration points are within manufacture's specification as IEC 61672 Class 1.

Uncertainties of Applied Value:

94 dB	31.5 Hz	± 0.15
	63 Hz	± 0.10
	125 Hz	±).15
	250 Hz	± 0.10
	500 Hz	± 0.05
	1000 Hz	± 0.05
	2000 Hz	± 0.05
	4000 Hz	± 0.05
	8000 Hz	± 0.10
104 dB	1000 Hz	± 0.05
114 dB	1000 Hz	± 0.05

The uncertainties are evaluated for a 95% confidence level.

Note:

The values given in this certification only related to the values measured at the time of the calibration and any uncertainties quoted will not allow for the equipment tong-term drift, variations with environmental changes, vibration and shock during transportation, overloading, mis-handling, or the capability of any other laboratory to repeat the calibration. (A+A)*L shall not be liable for any loss or damage resulting from the use of the equipment.

Certificate No.: AP. 21-012-CC001	¢4
Room 422,Leader Incus frial Centre,57-59 Au Pui Wan Street ,Fo Tan, Shatin,N.T.,Hong Kong Tel: (852) 2668 3423 Fax:(852) 2668 6946 Homepage: http://www.aa-lab.com E-mail : inquiry@aa-lab.com	

1



CALIBRATION CERTIFICATE

Certificate Informat	ion			
Date of Issue	7-Aug-2021]	Certificate Num	ber MLCN212053S
Customer Information	on			
Company Name		bility Consulting Lim	ited	
Address		ord Glory Plaza,		
	Nos. 37-39 Wir	ng Hing Street, an, Kowloon, HK		
	Cheung Sha wi	an, Kowioon, HK		
Equipment-under-To	est (EUT)			
Description	Acoustic Calibr	ator		
Manufacturer	Pulsar			
Model Number	105			
Serial Number	63705			
Equipment Number				
Calibration Particul				
Date of Calibration	7-Aug-2021	N / AN/2000/2 / 22 K	22	
Calibration Equipment		8) / AV200063 / 23-Ju 0) / MLEC21/05/02 / 2		
	155 ((WETERS	JJ7 WILEC21/03/0277	.0-May-22	
Calibration Procedure	MLCG00, MLC	CG15		
Calibration Conditions	Laboratory	Temperature	23 °C ± 5 °C	
		Relative Humidity	55% ± 25%	
	EUT	Stabilizing Time	Over 3 hours	
		Warm-up Time	Not applicable	
		Power Supply	Internal battery	
Calibration Results		were detailed in the c		
	All calibration r	esults were within EU	1 specification.	
Approved By & Date				AND AND A DEAL
			Λ	
			- K.O. Lo	7-Aug-2021
Statements				
 Calibration equipment used The reculumon this Calibration 			nternational standards. ed at the time of the calibration and	Non-second similar and a 10
			nental changes, vibration and shock	
			to repeat the measurement.	
			age resulting from the use of the El ted. No part of this Certificate may	
prior written approval of Ma				1
				Page 1 of 2

Page 1 of 2

ъ



		C	ertificate No.	MLCN212053S
Calibration Dat	a			
EUT Setting	Standard Reading	EUT Error from Setting	Calibration Uncertainty	EUT Specification
94 dB	93.9 dB	-0.1 dB	0.20 dB	± 0.2 dB
		- END -		
Calibrated By : Date :	Kencth 7-Aug-21		hecked By : atc :	K.O. Lo 7-Aug-21

Page 2 of 2



萬儀校正中心有限公司 MaxLab Calibration Centre Limited 香港新界葵涌華星街16-18 號保盈工業大厦 9 楼 B 室 Unit B, 9/F., Boldwin Industrial Bldg., 16-18 Wah Sing Street. Kwai Chung, N.T., Hong Kong Tel: (852) 2116 1380 Fax: (852) 2264 6450 Email: info@maxlab.com.hk

Appendix J The Certification of Laboratory with HOKLAS Accredited Analytical Tests



Hong Kong Accreditation Service 香港認可處

Certificate of Accreditation

認可證書

This is to certify that 特此證明

ACUMEN LABORATORY AND TESTING LIMITED

浩科檢測中心有限公司

Flat/Rm D, 12/F, Ford Glory Plaza, Nos. 37-39 Wing Hong Street, Cheung Sha Wan, Kowloon, Hong Kong

香港九龍長沙灣永康街37-39號福源廣場12樓D室

is accredited by the Hong Kong Accreditation Service (HKAS) to ISO/IEC 17025:2017 for performing specific laboratory activities as listed in the scope of accreditation within the test category of 獨香港認可處根據ISO/IEC 17025:2017認可 進行軟於認可範圍內下這測試類別中的指定實驗所活動

> Environmental Testing 環境測試

This accreditation to ISO/IEC 17025:2017 demonstrates technical competence for a defined scope and the implementation of a management system relevant to Isboratory operation (see joint IAF-ILAC-ISO Communique), 此項 ISO/IEC 17025:2017 的經可資格證明此實驗所具備指定範疇內所須的技術能力並 實施一套與實驗所證作相關的質理體系 (見圖原語可論壇、圖願實驗所認可合作相識及圖媒標準化相違的綜合公領)。

The common seal of HKAS is affixed hereto by the authority of the HKAS Executive 現經香港認可處執行機關授權在此畫上香港認可處的印章

SHUM Wal-leung, Executive Administrator 執行幹事 沈偉良 Issue Date : 15 November 2021 簽發日期 : 二零二一年十一月十五日

Registration Number : HOKLAS 241 註冊號碼 :




Date of First Registration: 16 July 2014 首次註冊日期:二零一四年七月十六日

This certificate is issued subject to the terms and conditions laid down by HKAS 本證書供用者通經可處訂立的導致及媒件發出 L002316



This certificate is issued subject to the terms and conditions laid down by HKAS 本證書按照書港認可處訂立的條款及條件發出 L001934

Appendix K Location Plan of Noise and Air Quality Monitoring Station

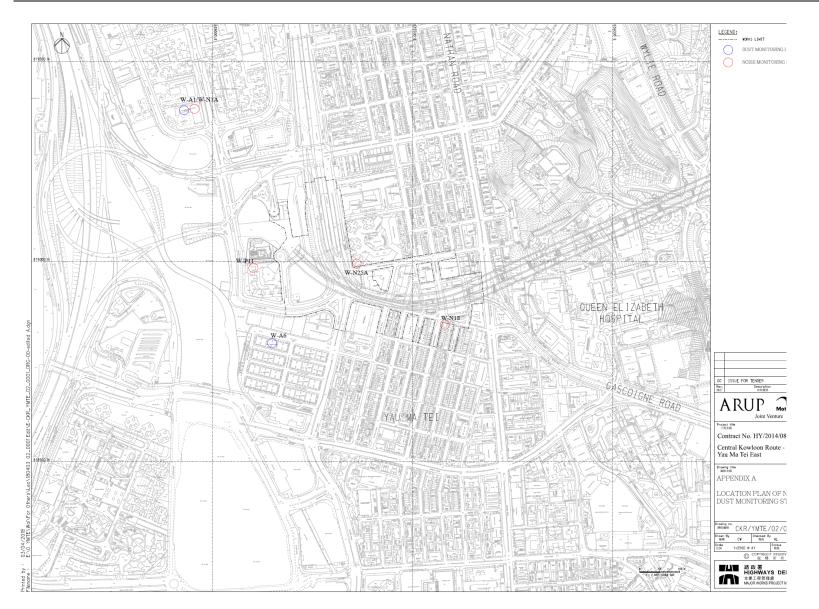

Appendix L Monitoring Data (Air Monitoring)

Location: Monitoring date: Parameter : Other Factors Yau Ma Tei Catholic Primary School (Hoi Wang Road) (W-A1) 3, 9, 15, 21 and 26 March 2022 TSP 1-hour Nearby traffic

		1-hour TSP (μg/m ³)										
Date	Weather	Start Time	1 st Hour (μg/m ³)	2 nd Hour (μg/m ³)	3 rd Hour (μg/m ³)							
03/03/2022	Sunny	9:04	64	62	59							
09/03/2022	Sunny	11:49	65	60	57							
15/03/2022	Sunny	10:48	60	67	61							
21/03/2022	Fine	9:04	63	68	64							
26/03/2022	Fine	10:33	54	59	51							
Min	imum: 51 μg/m	3		Maximum: 68 µg	$/m^3$							

Location: Monitoring date: Parameter : Other Factors Man Cheong Building (W-A6) 3, 9, 15, 21 and 26 March 2022 TSP 1-hour Nearby traffic

			1-hour TSP (J	ug/m ³)	
Date	Weather	Start Time 1 st Hour (µg/m ³)		2 nd Hour (μg/m ³)	3 rd Hour (μg/m ³)
03/03/2022	Sunny	9:20	68	73	67
09/03/2022	Sunny	10:04	62	60	66
15/03/2022	Sunny	9:53	59	68	71
21/03/2022	Fine	9:49	66	64	69
26/03/2022	Fine	9:55	57	66	69
]	Minimum: 57	ug/m³		Maximum: 73 µg	/m ³

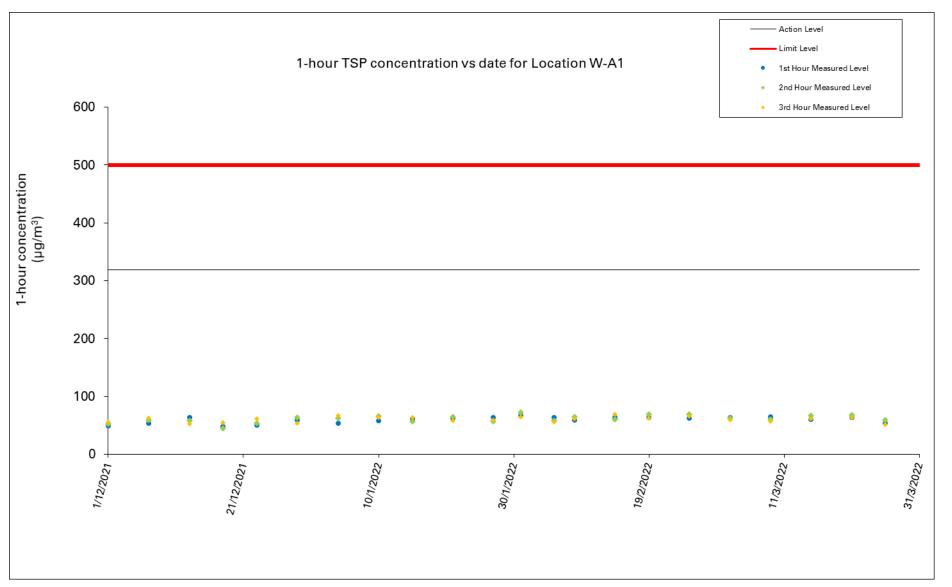


Figure 1: Graphical Illustration of Measured 1-hour TSP (μ g/m³) Levels at W-A1

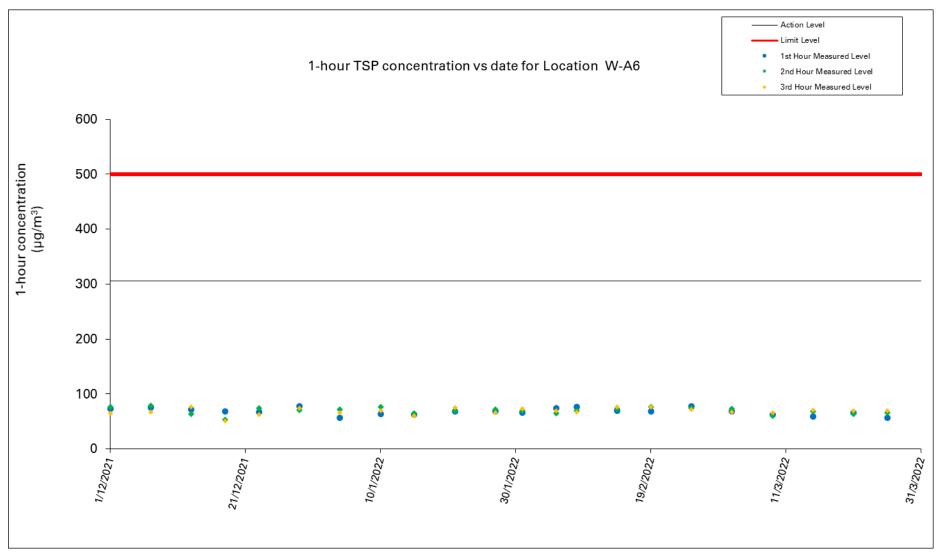



Figure 2: Graphical Illustration of Measured 1-hour TSP (μ g/m³) Levels at W-A6


Location: Monitoring date: Parameter : Other Factors Yau Ma Tei Catholic Primary School (Hoi Wang Road) (W-A1) 3, 9, 15, 21 and 26 March 2022 TSP 24-hour Nearby traffic

						Date of C Calibration	alibration:	22-Feb-22		2.5195 38.3264					
														Intercept = Slope =	
										Calibration	alibration: due date:			Intercept =	
Start Date	Weather	Elapse Time Chart Reading				Chart Reading		Avg Air Temp	Avg Atmospheric Pressure		Standard Air Volume	Filter Weig	ht (g)	Particulate weight	Conc.
	Condition	Initial	Final	Actual (min)	Min	Max	Avg		(hPa)	(m ³ /min)	(m ³)	Initial	Final	(g)	$(\mu g/m^3)$
3/3/2022	Sunny	6383.5	6407.5	1440.0	40	40	40.0	19.5	1017.2	0.88	1260	2.7530	2.8792	0.1262	100
9/3/2022	Sunny	6407.5	6431.5	1440.0	39	40	39.5	18.7	1017.2	0.70	1002	2.7819	2.8673	0.0854	85
15/3/2022	Sunny	6431.8	6455.8	1440.0	40	40	40.0	23.8	1010.8	1.36	1952	2.7863	2.8592	0.0729	37
21/3/2022	Fine	6455.8	6479.8	1440.0	39	39	39.0	22.1	1012.9	0.95	1365	2.7808	2.7940	0.0132	10
26/3/2022	Fine	6479.8	6503.8	1440.0	40	41	40.5	26.4	1010.4	1.51	2176	2.7389	2.7995	0.0606	28
										Maximum:	100	$\mu g/m^3$	Minimum:	10	$\mu g/m^3$

Location:	Man Cheong Building (W-A6)
Monitoring date:	3, 9, 15, 21 and 26 March 2022
Parameter :	TSP 24-hour
Other Factors	Nearby traffic

										Date of C	alibration:	9-Mar-22		Slope =	2.8149			
						Calibration	n due date:	24-Mar-22		Intercept =	37.6435							
	Γ											14-Mar-22		Slope =	3.5392			
										Calibration	n due date:	29-Mar-22		Intercept =	35.9408			
Start Date	Weather Condition		Elapse Time Chart Reading Avg Air Temp Press				Unart Reading			Chart Reading			Flow Rate	Standard Air Volume	Filter Weig	ht (g)	Particulate weight	Conc.
	Condition	Initial	Final	Actual (min)	Min	Max	Avg	(°C)	(hPa)	(m ³ /min)	(m ³)	Initial	Final	(g)	$(\mu g/m^3)$			
3/3/2022	Sunny	5996.6	6020.6	1440.00	39	40	39.5	19.5	1017.2	0.85	1218	2.7538	2.8572	0.1034	85			
9/3/2022	Sunny	6020.6	6044.6	1440.00	40	40	40.0	18.7	1017.2	1.05	1506	2.7791	2.8730	0.0939	62			
15/3/2022	Sunny	6044.9	6068.9	1440.00	38	39	38.5	23.8	1010.8	0.72	1035	2.7847	2.8618	0.0771	74			
21/3/2022	Fine	6068.9	6092.9	1440.00	38	39	38.5	22.1	1012.9	0.77	1113	2.7298	2.8391	0.1093	98			
26/3/2022	Fine	6092.9	6116.9	1440.00	40	41	40.5	26.4	1010.4	1.23	1770	2.7235	2.8738	0.1503	85			
										Maximum:	98	$\mu g/m^3$	Minimum:	62	µg/m ³			

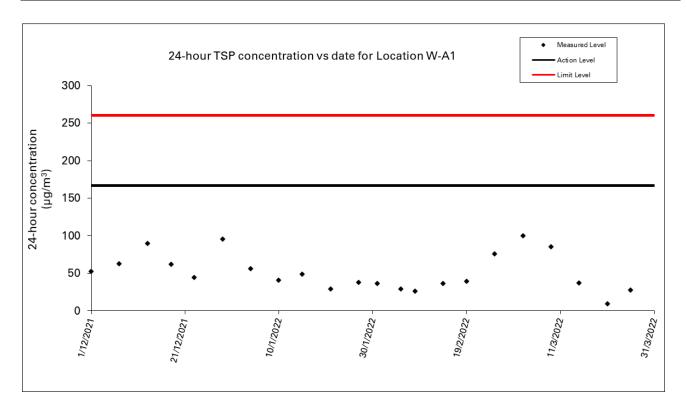






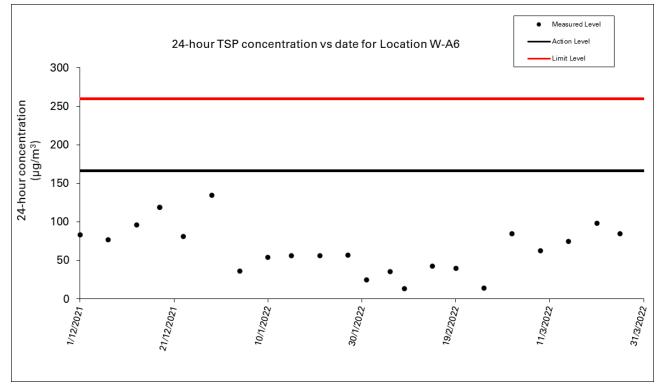


Figure 4: Graphical Illustration of Measured 24-hour TSP (μ g/m³) Levels at W-A6

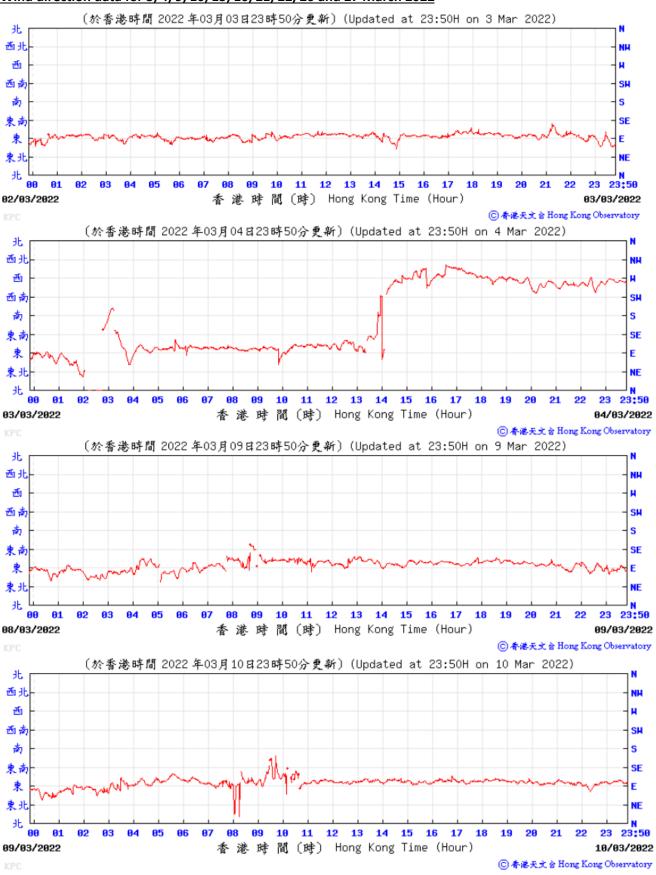



Wind direction data for 3, 4, 9, 10, 15, 16, 21, 22, 26 and 27 March 2022

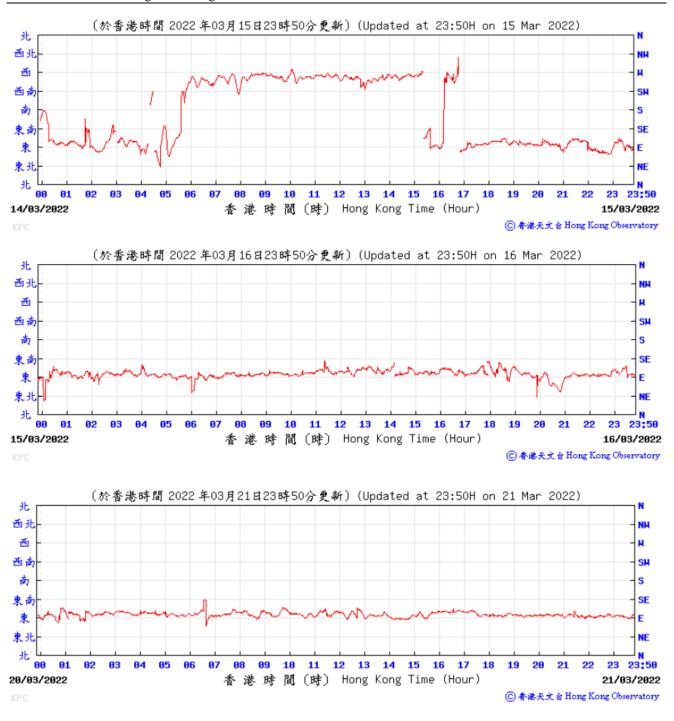

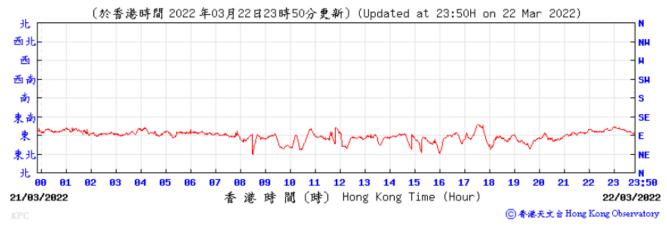



Acuity Sustainability Consulting Ltd.

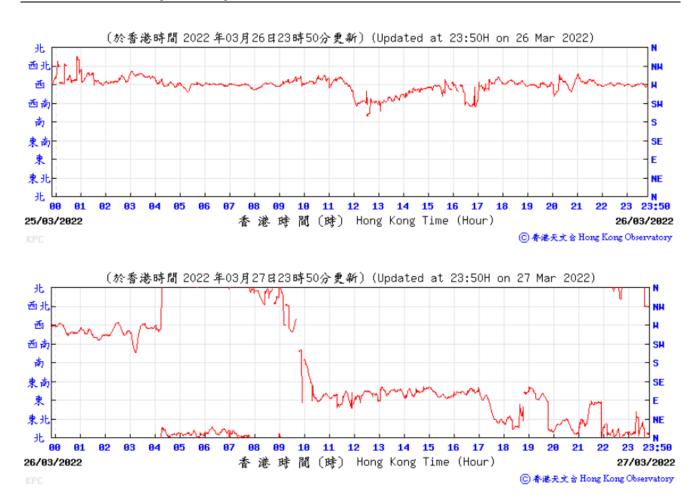


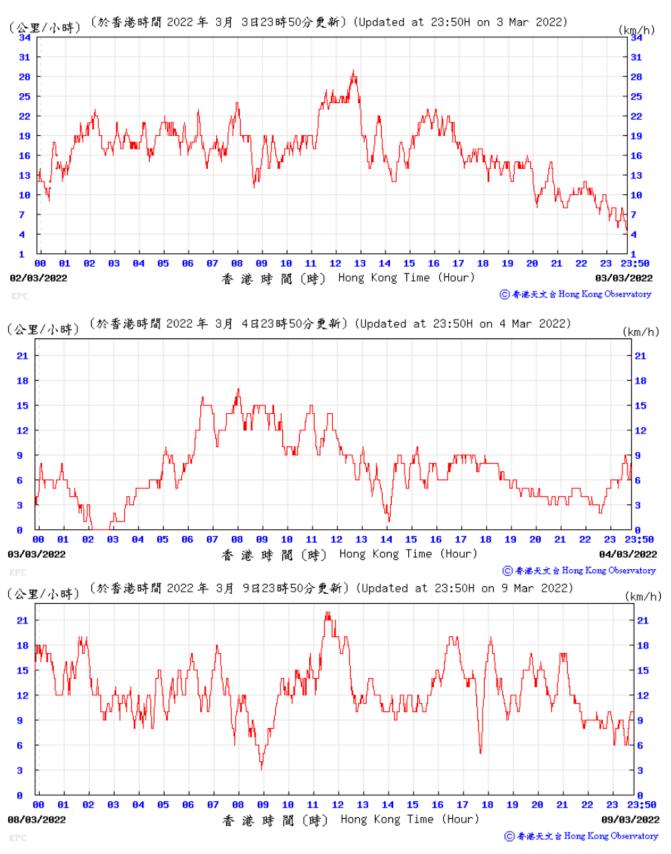

Wind speed data for 3, 4, 9, 10, 15, 16, 21, 22, 26 and 27 March 2022

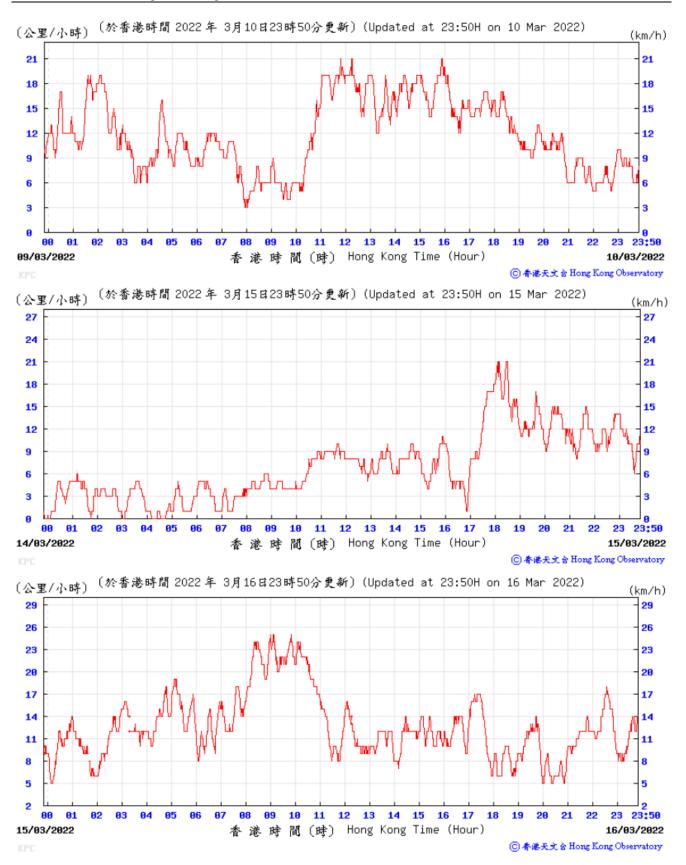

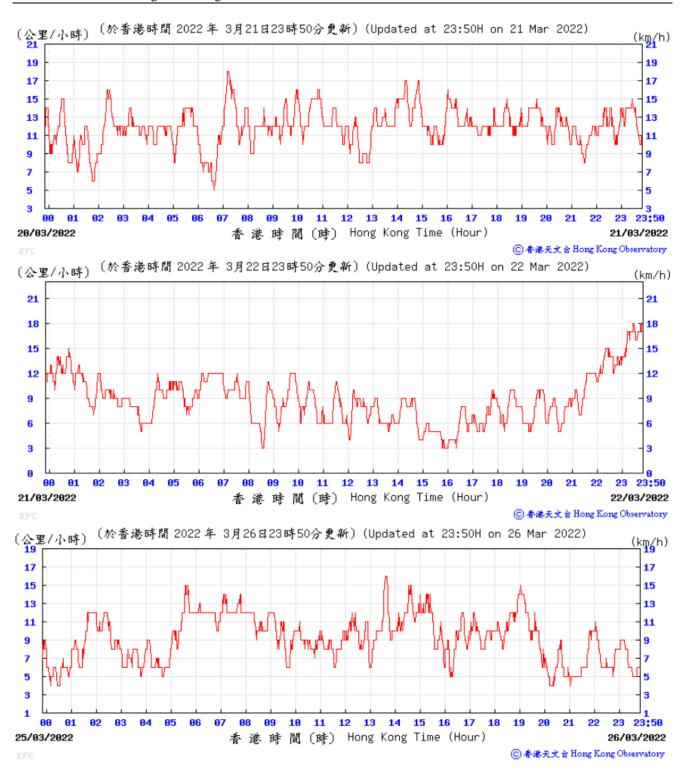

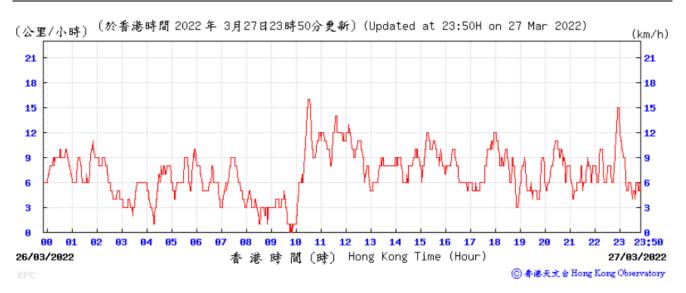

Appendix M Monitoring Data (Noise)

Location:

Yau Ma Tei Catholic Primary School (Hoi Wang Road) (W-N1A)

Monitoring date:3, 9, 15, 21 and 26 March 2022Parameter : L_{eq}, L_{10}, L_{90} Other FactorsNearby traffic

Date	Weather	Start Time	-	End Time	L_{eq}	L ₁₀	L ₉₀	Wind speed (m/s)
03/03/2022	Sunny	11:52	-	12:22	60.9	63.3	58.3	4.8
09/03/2022	Sunny	11:45	-	12:15	58.4	60.9	54.9	4.5
15/03/2022	Sunny	10:50	-	11:20	58.9	62.2	56.5	1.7
21/03/2022	Fine	12:28	-	12:58	60.3	62.8	58.0	4.2
26/03/2022	Fine	10:36	-	11:06	58.6	60.8	56.1	2.5

Location:Hydan Place (W-N18)Monitoring date:3, 9, 15, 21 and 26 March 2022Parameter : L_{eq}, L_{10}, L_{90} Other FactorsNearby traffic

Date	Weather	Start Time	-	End Time	L_{eq}	L ₁₀	L ₉₀	Wind speed (m/s)
03/03/2022	Sunny	10:20	-	10:50	70.3	73.4	69.1	4.7
09/03/2022	Sunny	14:23	-	14:53	71.6	74.3	69.4	3.3
15/03/2022	Sunny	11:42	-	12:12	69.9	73.1	67.6	2.5
21/03/2022	Fine	10:17	-	10:47	69.1	72.6	67.6	4.2
26/03/2022	Fine	12:37	-	13:07	69.1	72.8	66.8	3.1

Location:	Prosperous Garden Block 1 (W-N25A)
Monitoring date:	3, 9, 15, 21 and 26 March 2022
Parameter :	L_{eq}, L_{10}, L_{90}
Other Factors	Nearby traffic

Date	Weather	Start Time	-	End Time	L _{eq}	L ₁₀	L ₉₀	Wind speed (m/s)
03/03/2022	Sunny	9:34	-	10:04	69.8	72.6	68.3	4.4
09/03/2022	Sunny	13:39	-	14:09	71.2	74.1	69.5	4.2
15/03/2022	Sunny	9:07	-	9:37	71.6	73.8	68.3	1.4
21/03/2022	Fine	10:59	-	11:29	68.9	74.9	67.2	4.4
26/03/2022	Fine	9:04	-	9:34	70.3	74.0	67.8	3.2

Location:The Coronation Tower 1 (W-P1)
--

Monitoring date:	3, 9, 15, 21 and 26 March 2022
Parameter :	L_{eq}, L_{10}, L_{90}
Other Factors	Nearby traffic

Date	Weather	Start Time	-	End Time	L_{eq}	L ₁₀	L ₉₀	Wind speed (m/s)
03/03/2022	Sunny	11:06	-	11:36	67.2	69.1	64.6	4.7
09/03/2022	Sunny	10:39	-	11:15	68.3	70.4	65.5	3.9
15/03/2022	Sunny	12:36	-	13:06	68.8	72.3	65.5	1.9
21/03/2022	Fine	11:41	-	12:11	68.9	71.0	65.3	3.6
26/03/2022	Fine	11:29	-	11:59	67.2	70.0	65.2	2.5

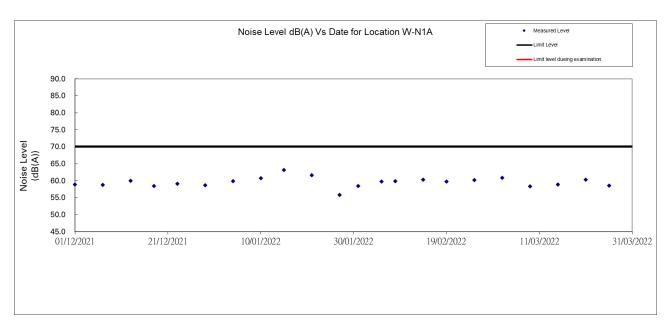


Figure 1: Graphical Illustration of Measured Noise Levels at W-N1A

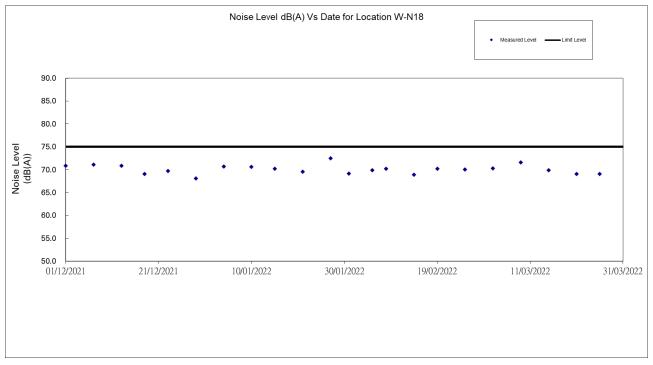


Figure 2: Graphical Illustration of Measured Noise Levels at W-N18

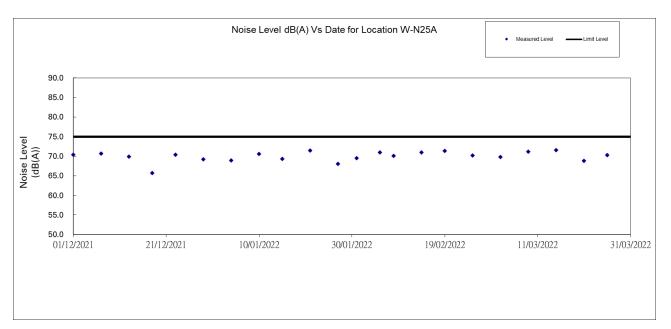


Figure 3: Graphical Illustration of Measured Noise Levels at W-N25A

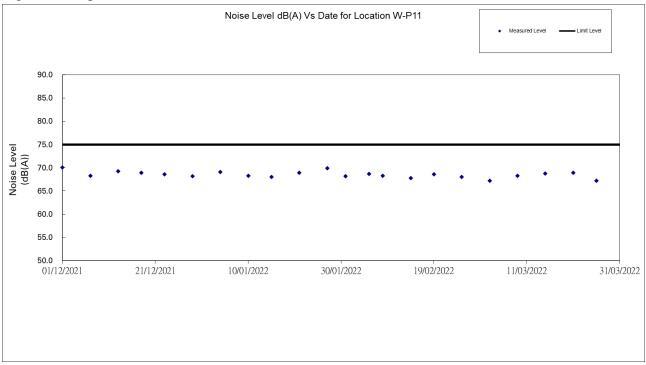


Figure 4: Graphical Illustration of Measured Noise Levels at W-P11

Appendix N Waste Flow Table

Monthly Summary Waste Flow Table

Name of Department: <u>Highways Department</u>

Contract No. / Works Order No.: <u>HY/2014/08</u>

 Monthly Summary Waste Flow Table for March 2022
 [to be submitted not later than the 15th day of each month following reporting month] (All quantities shall be rounded off to 1 decimal place.)

		Actual Quantities of <u>Inert</u> Construction Waste Generated Monthly							
Month	(a)=(b)+(c)+(d)+(e)+(f)+(g)+(h)+(i)+(j)+(k) Total Quantity Generated	(b) Hard Rock and Large Broken Concrete	(c) Reused in the Contract	(d) Reused in other Projects	(e) Disposed of as Public Fill	(f) Imported Fill			
	(in 'tonnes)	(in 'tonnes)	(in 'tonnes)	(in 'tonnes)	(in 'tonnes)	(in 'tonnes)			
Jan-22	7033.91	116.10	232.40	4412.20	2227.40	0.00			
Feb-22	1632.60	157.80	435.30	590.60	557.10	0.00			
Mar-22	4333.30	39.20	99.00	1114.20	3043.30	0.00			
Apr-22									
May-22									
Jun-22									
Sub-total	13132.11	313.10	766.70	6117.00	5827.80	0.00			
Jul-22									
Aug-22									
Sep-22									
Oct-22									
Nov-22									
Dec-22									
Total	13132.11	313.10	766.70	6117.00	5827.80	0.00			
2018	51057.90	0.00	0.00	0.00	47715.60	2877.40			
2019	112830.10	541.00	1523.80	13525.00	93132.90	3155.60			
2020	193021.92	58778.00	1205.60	19108.60	112556.80	0.00			
2021	104679.02	6461.30	1393.70	1144.70	92950.20	1542.90			
Accumulated Total	474721.05	66093.40	4889.80	39895.30	352183.30	7575.90			

				Act	ual Quantities of <u>Non-ine</u>	rt Construction Waste	e Generated Monthly			
Month	(g) Metals		(h) Paper/ cardboard packaging		(i) Plastics		(j) Chemical Waste		(k) Others, e.g. General Refuse disposed at Landfill	
	(in '0)00kg)	(in '000kg)		(in '000kg)		(in '000kg)		(in 'tonnes)	
	generated	recycled	generated	recycled	generated	recycled	generated	recycled	generated	
Jan-22	0.00	0.00	0.00	0.00	0.01	0.00	0.00	0.00	45.80	
Feb-22	0.00	0.00	0.60	0.00	0.00	0.00	0.00	0.00	23.50	
Mar-22	0.00	0.00	0.00	0.00	0.00	0.00	0.80	0.00	36.80	
Apr-22										
May-22										
Jun-22										
Sub-total	0.00	0.00	0.60	0.00	0.01	0.00	0.80	0.00	106.10	
Jul-22										
Aug-22										
Sep-22										
Oct-22										
Nov-22										
Dec-22										
Total	0.00	0.00	0.60	0.00	0.01	0.00	0.80	0.00	106.10	
2018	28.40	0.00	0.00	0.00	0.00	0.00	2.00	0.00	434.50	
2019	0.00	9.10	3.40	6.80	0.00	0.00	5.20	0.00	927.30	
2020	69.20	0.00	3.30	0.00	0.02	0.00	25.30	0.00	1275.10	
2021	30.20	0.00	4.80	0.00	0.02	0.00	25.50	0.00	1125.70	
Accumulated Total	127.80	9.10	12.10	6.80	0.05	0.00	58.80	0.00	3868.70	

Remark: Construction waste record for Feb-22 has been updated.

Appendix O Statistics on Complaint, Notifications of Summons and Successful Prosecutions

	Statistical Summary of Exce	edances						
	Air Quality							
Reporting Period	Action Level	Limit Level						
1 March 2022- 31 March 2022	0	0						
	Noise							
Reporting Period	Action Level	Limit Level						
1 March 2022-	1	0						
31 March 2022	4	0						

Statistical Summary of Environmental Complaints

Departing David		Environmental Complaint Sta	tistics
Reporting Period	Frequency	Cumulative	Complaint Nature
1 March 2022- 31 March 2022	4	34	N/A

Statistical Summary of Environmental Non-compliance

Departing Daried	En	Environmental Non-compliance Statistics						
Reporting Period	Frequency	Cumulative	Details					
1 March 2022-	0	1	N/A					
31 March 2022	0	1	N/A					

Statistical Summary of Environmental Summons

Donorting Doriod	Environmental Summons Statistics		
Reporting Period	Frequency	Cumulative	Details
1 March 2022- 31 March 2022	0	1	N/A

Statistical Summary of Environmental Prosecution

Departing Daried	Environmental Prosecution Statistics		
Reporting Period	Frequency	Cumulative	Details
1 March 2022- 31 March 2022	0	0	N/A

Appendix P Monitoring Schedule of the Coming Month

Impact Monitoring Schedule for YMTE						
	Apr-22					
Sun	Mon	Tue	Wed	Thur	Fri	Sat
sun	Woh	Tue	wed	rhur	1	2
					Impact	2
					Air monitoring for W-A6 &W-A1	
					Noise monitoring for W-N1A,	
					W-P11,W-N18 & W-N25A	
	4	E	6	7		9
3	4	5	6	/ Impact	8	9
				mpace		
				Air monitoring for W-A6 &W-A1		
				Noise monitoring for W-N1A,		
				W-P11,W-N18 & W-N25A		
10	11	12	13	14	15	16
			Impact			
			Air monitoring for W-A6 &W-A1			
			Noise monitoring for W-N1A,			
			W-P11, W-N18 & W-N25A			
17	18	19	20	21	22	23
		Impact				
		Air monitoring for W-A6 &W-A1				
		Noise monitoring for W-N1A, W-P11,W-N18 & W-N25A				
		W-P11, W-N18 & W-N25A				
24	25	26	27	28	29	30
	Impact					Impact
	Air monitoring for W-A6 &W-A1					Air monitoring for W-A6 &W-A1
	Noise monitoring for W-N1A,					Noise monitoring for W-N1A,
	W-P11,W-N18 & W-N25A					W-P11,W-N18 & W-N25A

Appendix Q Interim Report for the Complaint

Contract No. HY/2014/08 Central Kowloon Route, Yau Ma Tei East Section

Build King - SKEC Joint Venture

Interim Report on Environmental Complaint

Project	Central Kowloon Route, Yau Ma Tei East Section
Complaint Code	EC032-CKRYMTE20220301 001
Complaint description	The complainant complained that he suffered from noise generated from piling works at sites near Shanghai Street during night-time and wanted to know whether the construction works have the permit and are legal.
	"您好,上海街 279 號附近,經常徹夜進行工程,已經持續很長時間了,嚴重影響 附近居民休息。不知道該工程是否有許可證,是否合法施工。萬望解決,謝謝! 依旧彻夜打桩施工,每夜不停,搅得四邻不安,无法入睡。就是途中标明处施 工,希望予以处理。"
Parameter	Construction Noise
Investigation finding	The complainant made the complaints on 1 and 4 March 2022 and was concerned about the noise impacts generated from piling works at Zone C. The complainant did not specify the concerning dates and therefore we assume the investigation period to be 22 February to 5 March 2022.
	As noted from the contractor, no construction works at Zone C were carried out after 7:00 PM. The CNP for the construction site at Canton Road between Public Square Street and Kansu Street, Yau Ma Tei, Kowloon (Permit No.: GE-RE1308-21) was issued by the EPD but no PME was used during the investigation period. D-wall construction works were only carried out during daytime (within 7:00 AM to 7:00 PM) of 22 February to 5 March 2022 in Zone C.
	Impact noise monitoring had been carried out at the nearest monitoring location at Hydan Place(W-N18) on 5, 8, 14, 19, 25 February and 3 March 2022 and the monitoring results at W-N18 were 69.9, 70.2, 68.9, 70.2, 70.1 and 70.3 dB(A) in $L_{eq30min}$, which were all below the limit level of 75 dB(A) in $L_{eq30min}$. As similar works had been conducted in February and early March 2022, it was believed that the construction noise generated during daytime in February and early March 2022 did not exceed the noise limit level as stipulated under EM&A manual. In addition, no environmental deficiency regarding construction noise at construction site at Zone C was observed during weekly site inspection conducted on 10, 17, 24 (with IEC) February and 3 March 2022.
	As the construction noise generated during daytime in February and early March 2022 did not exceed the noise limit level as stipulated under EM&A manual, it is concluded that no non-compliance to the EM&A requirement of the Project regarding noise impacts from construction works.
Actions taken / to be taken	The Contractor had followed EM&A Manual strictly to implement mitigation measures in order to minimize nuisance to the public. Noise barrier mat has been erected by the Contractor to reduce impact from the construction works. Supporting photo is provided in Appendix A.
Remarks	 PME used in Zone C form 22 February to 5 March 2022 during daytime: Excavator x 1 Mobile crane x 1 Construction works carried out in Zone C from 22 February to 5 March 2022 during daytime: D-wall construction Works locations: (Page 3)

Page 1 of 4

Contract No. HY/2014/08

Central Kowloon Route, Yau Ma Tei East Section

Build King - SKEC Joint Venture

Prepared by ET (Acuity Sustainability Consulting Limited)	Katrina Chui	fib
Reviewed by ETL (Acuity Sustainability Consulting Limited)	Kelvin Li	Ks
Approved by IEC (ERM-Hong Kong, Limited)	Mandy To	Mandy 20
Date	18 Marc	h 2022

Page 2 of 4

Works Locations:



Page 3 of 4

Appendix A Supporting Photos



Figure A: Noise Barrier Mat

Contract No. HY/2014/08 Central Kowloon Route, Yau Ma Tei East Section


Build King - SKEC Joint Venture

Interim Report on Environmental Complaint

Project	Central Kowloon I	Route, Yau Ma Tei E	ast Section	
Complaint Code	EC033-CKRYMTE20220315_001			
Complaint description	The complainant who lives in The Coronation complained that the drilling works at sites near The Coronation were seriously noisy. The complainant requested the environmental team to investigate if the construction sites meet the environmental requirement. "你好: 我居住于油麻地友翔道1号御金国峰,旁边的工地整日不间断钻地噪音不 断严重影响了精神状态,加上现在全部时间居家办公更是整日被噪音环绕。能否 请环保专员至现场查看是否符合环保要求,请多为周围的居民考虑一下,谢谢!"			
Parameter	Construction Noise			
Investigation finding	The complainant made the complaint on 15 March 2022 and was concerned about the noise impacts generated from drilling activities. As the complaint did not specify the concerned dates, the one week before the complaint date would be investigated and the investigation period would be from 8 to 15 March 2022. As noted from the Contractor, the welding work was carried out during day-time from 8 to 15 March 2022, no construction works were carried out after 7:00 PM, and no drilling activities were carried out in the nearest site to The Coronation.			
	The nearest noise monitoring point to the concerned areas is The Coronation Tower 1 (W-P11). Impact noise monitoring had been carried out on 3, 9 and 15 March 2022 and the monitoring results at W-P11 were 67.2, 68.3 and 68.8dB(A) in $L_{eq30min}$, which were all below the limit level for the monitoring location at 75dB(A) in $L_{eq30min}$. As similar works had been conducted from 8 to 15 March 2022, it was believed that the construction noise generated during daytime from 8 to 15 March 2022 did not exceed the noise limit level as stipulated under EM&A manual. In addition, no environmental deficiency regarding construction noise at Zone A was observed during weekly site inspection conducted on 3, 10 and 17 March 2022.			
Actions taken / to be taken	construction works. The Contractor had followed EM&A Manual strictly to implement mitigation measures in order to minimize nuisance to the public.			
Remarks	in order to minimize nuisance to the public. PME used in Zone A from 8 to 15 March 2022 during daytime: • Welding Machine x1			
	Construction works carried out in Zone A from 8 to 15 March 2022 during daytime: • Welding work Works locations: (next page.)			
Prepared by ET (Acuity Sustainability Consulting Limited)	Katrina Chui	fil		
Reviewed by ETL (Acuity Sustainability Consulting Limited)	Kelvin Li	K.		
Approved by IEC (ERM-Hong Kong, Limited)	Mandy To	Mondy 20.		
Date	22 Mai	rch 2022 Page 1 of 2]	



Contract No. HY/2014/08 Environmental Monitoring & Auditing

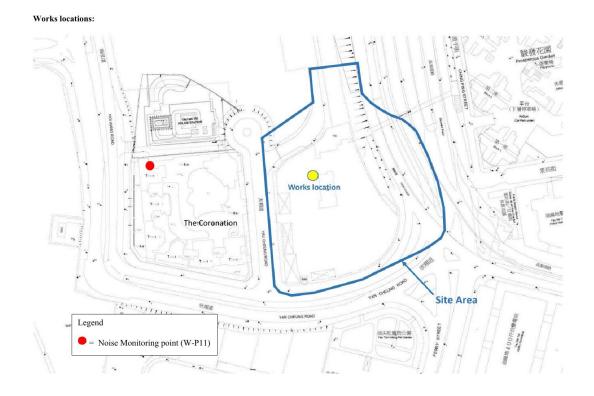

Page 2 of 2

Contract No. HY/2014/08 Central Kowloon Route, Yau Ma Tei East Section

Build King - SK ecoplant Joint Venture

Interim Report on Environmental Complaint


Project	Central Kowloon Route, Yau Ma Tei East Section		
Complaint Code	EC034-CKRYMTE20220323 001		
Complaint description	The complainant complained that,		
	" Dear Sir or Madam,		
	I hereby make a formal complaint about the construction noise near Yau Ma Tei.		
	The construction of the "Cut-and-cover Tunnel" in Yau Ma Tei East for Central Kowloon Route is making intolerable noise every weekday and Saturday. They claimed to have followed the noise-control measures, but the measures are not working, especially for those who live in the high-rise buildings nearby. Many people are working from home due to Covid, yet the noise is out of control. Please take measures."		
Parameter	Construction Noise		
Investigation finding	The complainant made the complaint on 23 March 2022 and was concerned about the noise impacts generated from the construction of the "Cut-and-cover Tunnel" in Yau Ma Tei East. As the complainant did not specify the concerned dates, the one week before the complaint date would be investigated and the investigation period would be from 17 to 23 March 2022.		
	As noted from the Contractor, the sites had construction of the "Cut-and-cover Tunnel" were Zone A, B and C. During daytime from 17 to 23 March 2022, the welding works, rebar fixing, and D-wall construction were carried out respectively at Zone A, B and C, and no night time works were carried out after 7:00 PM at three zones.		
	The nearest noise monitoring points to Zone A, B and C are Prosperous Garden (W-N25A) and The Coronation (W-P11). Impact noise monitoring had been carried out on 3, 9, 15 and 21 March 2022, the monitoring results at W-N25A were 69.8, 71.2, 71.6 and 68.9 dB(A) in L _{eq30min} , and the monitoring results at W-P11were 67.2, 68.3, 68.8 and 68.9 dB(A) in L _{eq30min} , which were all below the limit level for the monitoring location at 75dB(A) in L _{eq30min} . As similar works had been conducted from 17 to 23 March 2022, it was believed that the construction noise generated during daytime from 17 to 23 March 2022 did not exceed the noise limit level as stipulated under EM&A manual. In addition, no environmental deficiency regarding construction noise at Zone A, B and C was observed during weekly site inspection conducted on 3, 10, 17 and 24 (with IEC) March 2022.		
	As the construction noise generated during daytime from 17 to 23 March 2022 did not exceed the noise limit level as stipulated under EM&A manual, it is concluded that no non-compliance to the EM&A requirement of the Project regarding noise impacts from construction works.		
Actions taken / to be taken	The Contractor had followed EM&A Manual strictly to implement mitigation measures in order to minimize nuisance to the public. Noise barrier mat had been erected by the Contractor to reduce impact from the PME. Supporting photo is provided in Appendix A.		
Remarks	 PME used in Zone A rom 17 to 23 March 2022 during daytime: Welding Machine x 1 PME used in Zone B1 from 17 to 23 March 2022 during daytime: Excavator x 1 PME used in Zone B2 and C from 17 to 23 March 2022 during daytime: Excavator x 1 Mobile Crane x 1 		
	Construction works carried out in Zone A from 17 to 23 March 2022 during daytime: • Welding works		

Page 1 of 4

Contract No. HY/2014/08 Central Kowloon Route, Yau Ma	Tei East Section	Build	l King – SK ecoplant Joint Venture
	 Construction works carried out in Zone B from 17 to 23 March 2022 during daytime: Rebar fixing Construction works carried out in Zone C from 17 to 23 March 2022 during daytime: D-wall construction Works locations: (Next page) 		
Prepared by ET (Acuity Sustainability Consulting Limited)	Katrina Chui	fil	
Reviewed by ETL (Acuity Sustainability Consulting Limited)	Kelvin Li	K.	-
Verfied by IEC (ERM-Hong Kong, Limited)	Mandy To	Mandyz	
Date	29 Mar	ch 2022]

Page 2 of 4

Works location:

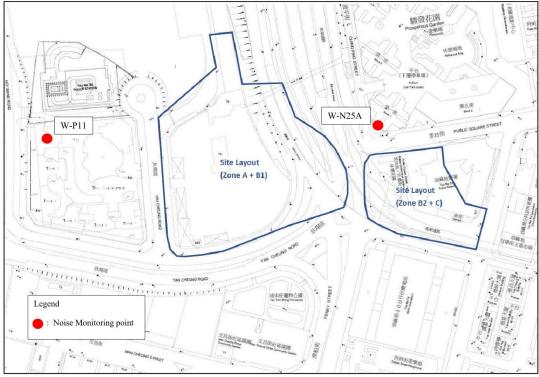

Page 3 of 4

Appendix A Supporting Photo



Figure A1 Noise barrier mat erected along site boundary

Interim H	Report on	Environmental	Complaint

Project	Central Kowloon Route, Yau Ma Tei East Section		
Complaint Code	EC035-CKRYMTE20220330_001		
Complaint description	The complainant complained about the construction noise from the site area at flyover near Yau Ma Tei Police Station at 2:00 AM. The complainant requested to follow up. "留言投訴油麻地警署附近天橋在半夜二時發出建築噪音,造成嚴重滋擾,要求跟 進及回覆。"		
Parameter	Construction Nois	-	
Investigation finding	The complainant made the complaint on 30 March 2022 and was concerned about the construction noise generated from the Zone B2 and C at 2:00 AM. The complainant did not specify the concerning dates and therefore we assume the investigation period to be 24 to 30 March 2022. As noted from the contractor, no construction works were carried out during the restricted hours (7:00 PM – 7:00 AM) form 24 to 30 March 2022. The CNP for the construction site at Canton Road between Public Square Street and Kansu Street, Yau Ma Tei, Kowloon (Permit No.: GE-RE1308-21) was issued by the EPD but no PME was used during the investigation period. As there were no construction works carried out after 7:00 PM from 24 to 30 March 2022, the complaint on noise impact is concluded non-project related.		
Actions taken / to be taken	As the complaint is non-project related, it was considered that additional actions to be taken were not necessary.		
Remarks	Works locations: (next page.)		
Prepared by ET (Acuity Sustainability Consulting Limited)	Katrina Chui	fib	
Reviewed by ETL (Acuity Sustainability Consulting Limited)	Kelvin Li	K	
Verified by IEC (ERM-Hong Kong, Limited)	Mandy To	Mondy 20.	
Date	6 Apri	1 2022	

Works location:

